

2JE17

CELLULAR Surface Mount

Key Features

CELLULAR

- 824-960 MHz
- 1710-2170 MHz


Surface Mount

High Performance

Fiberglass Material

Ground Plane Dependent

Dimensions 26 x 7.6 x 3 mm

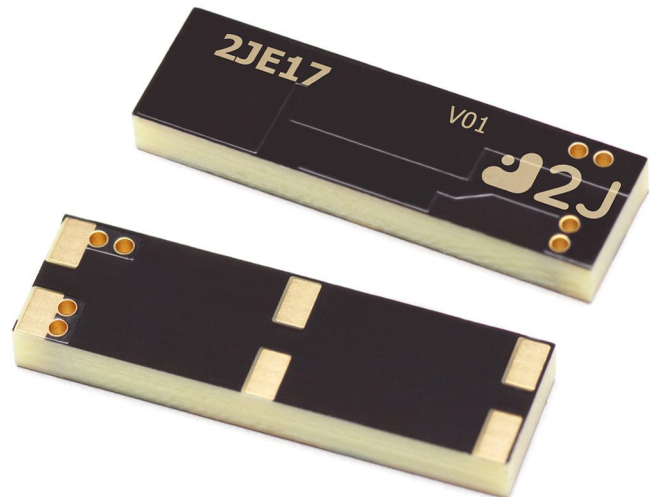

1. Antenna and electrical specifications

Parameters	CELLULAR Antenna	
Standards	2G and 3G	
Band (MHz)	850/900	1700/1800/1900/2100
Frequency (MHz)	824-960	1710-2170
Return Loss (dB)	~-8.5	~-13.3
VSWR	~3.3:1	~1.8:1
Efficiency (%)	~67.5	~70.8
Peak Gain (dBi)	~2.2	~2.2
Average Gain (dB)	~-1.7	~-1.6
Impedance (Ohm)	50	
Polarisation	Linear	
Radiation Pattern	Omni-Directional	
Max. Input Power (W)	25	

Antenna Measurement Conditions:



Mounted on ground plane of 113 x 40.5 mm



Measured in Certified CTIA 3D Anechoic Chamber



2. Mechanical and environmental specifications

Specifications	2JE17
Mounting Type	Surface Mount
Dimensions (mm)	26 x 7.6 x 3
Material	Fiberglass
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Storage Relative Humidity (%)	Up to 93 at 30 C
Substance Compliance	RoHS


3. Antenna parameters

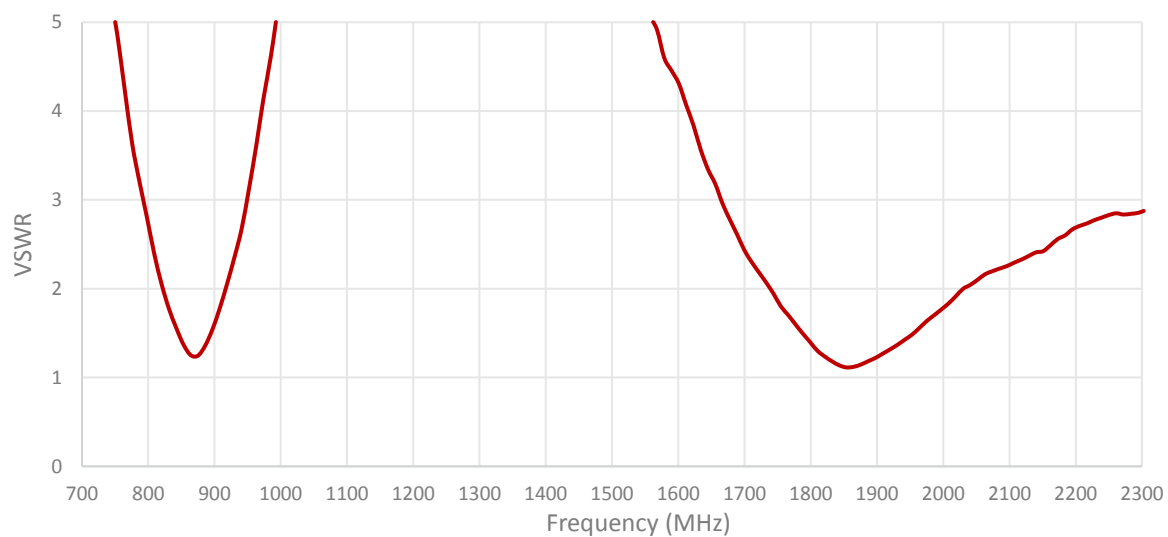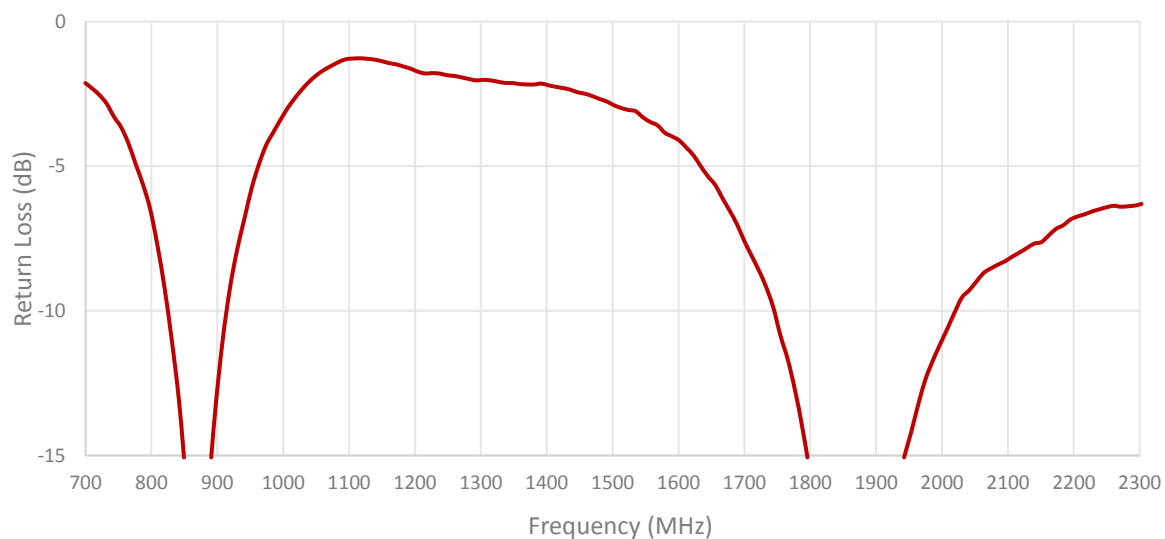

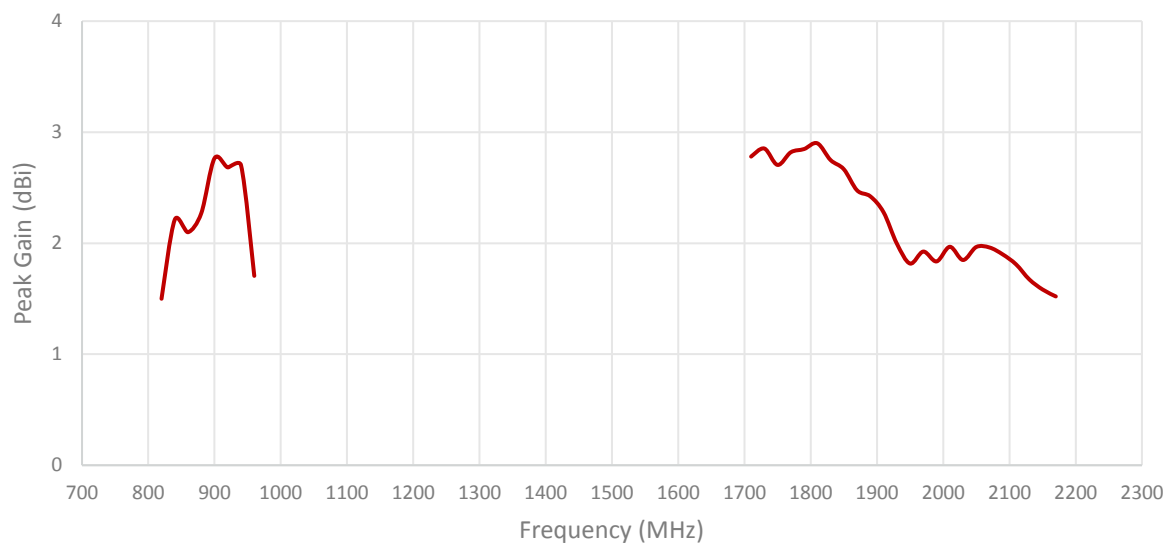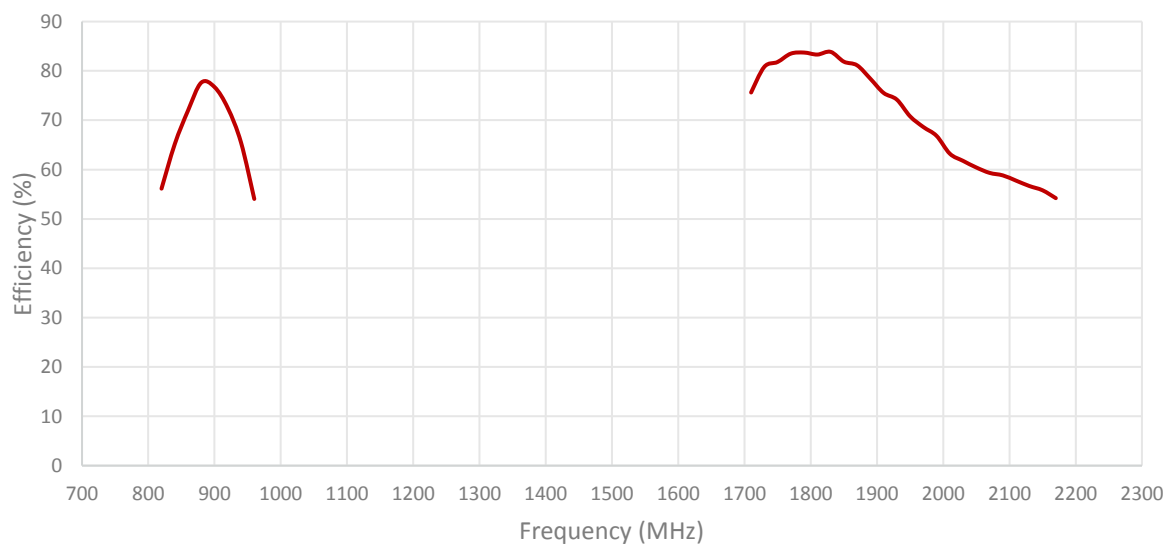


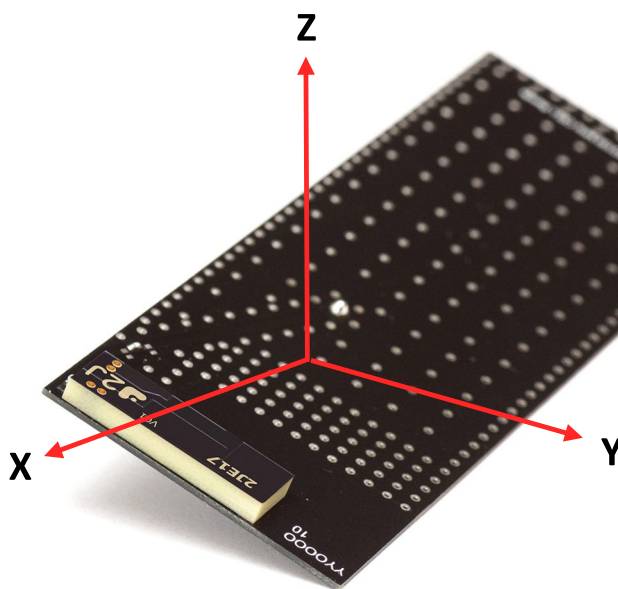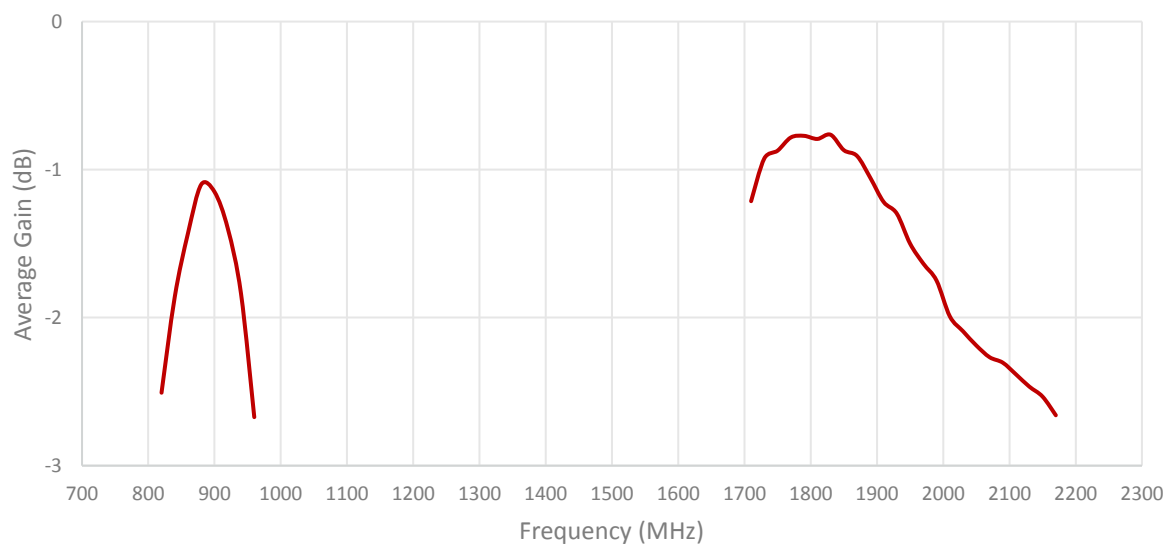


Radiation pattern reference

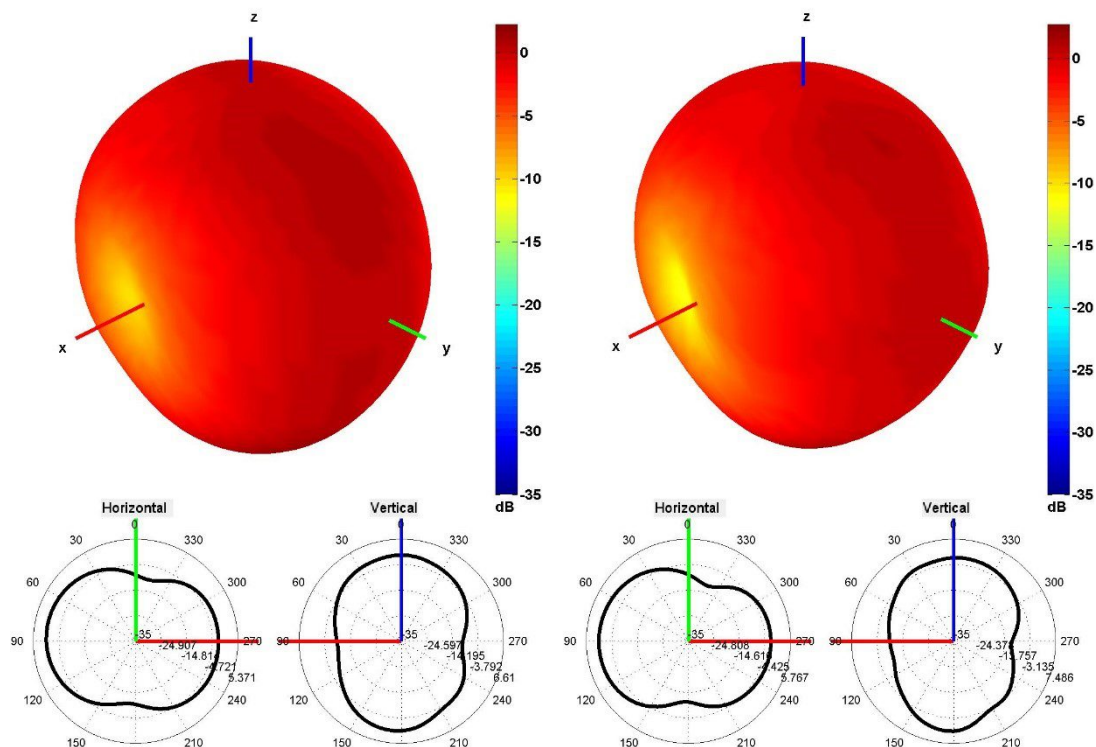

850 and 940 MHz Radiation pattern

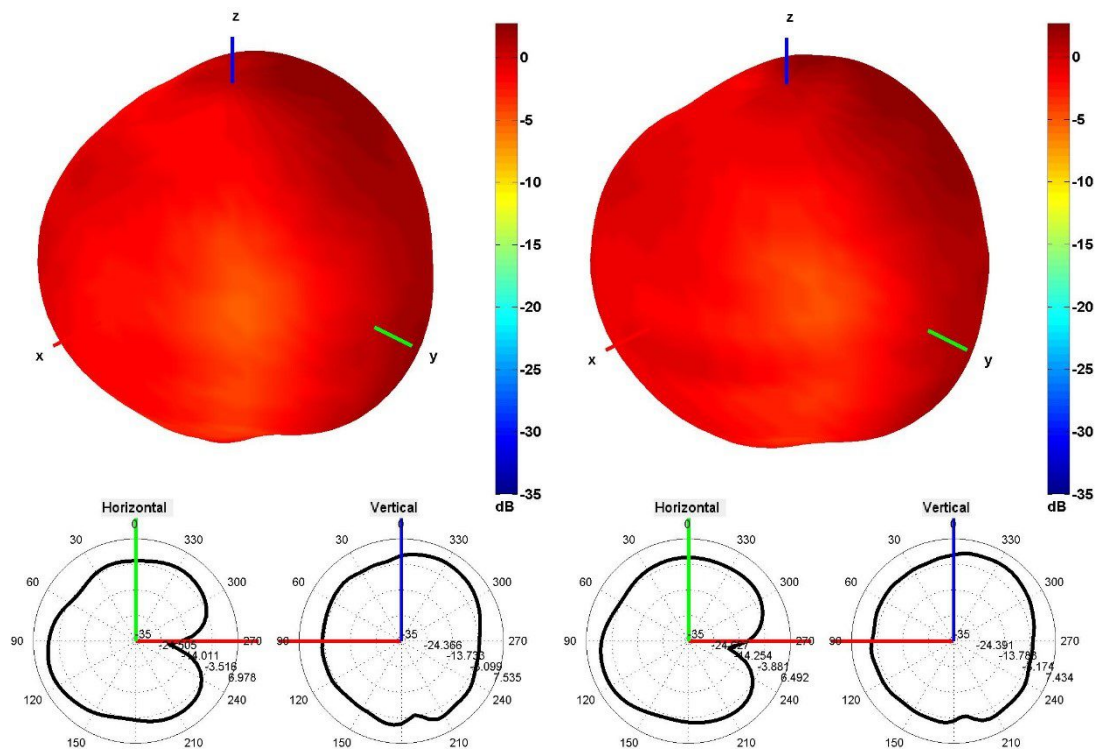


1750 and 1850 MHz Radiation pattern

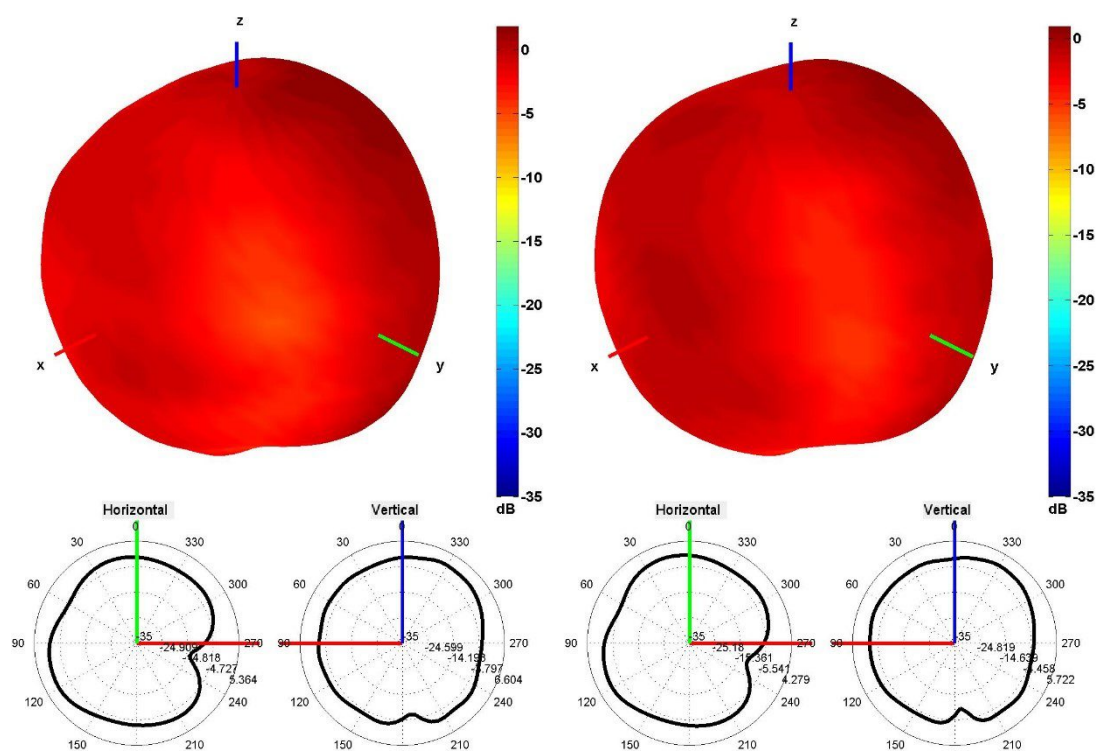


1950 and 2100 MHz Radiation pattern

4. PCB Layout

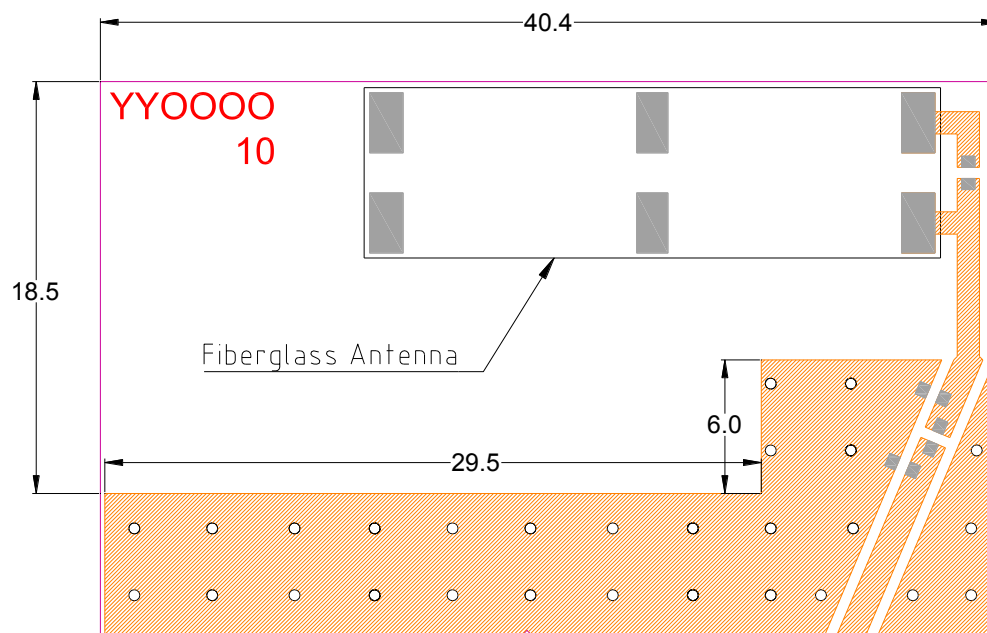

Minimum area required for antenna integration (40.4mm × 18.5mm)


- Solder Region
- Copper Region
- Copper-Free Region

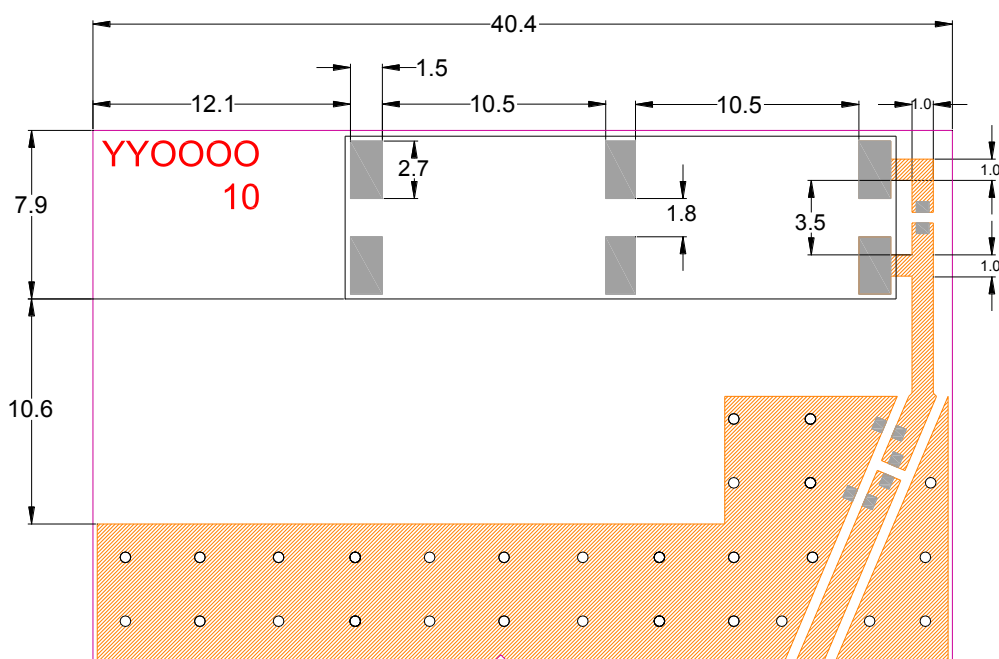

Layout dimensions for antenna integration (mm)



- Solder Region
- Copper Region
- Copper-Free Region

5. Matching Network

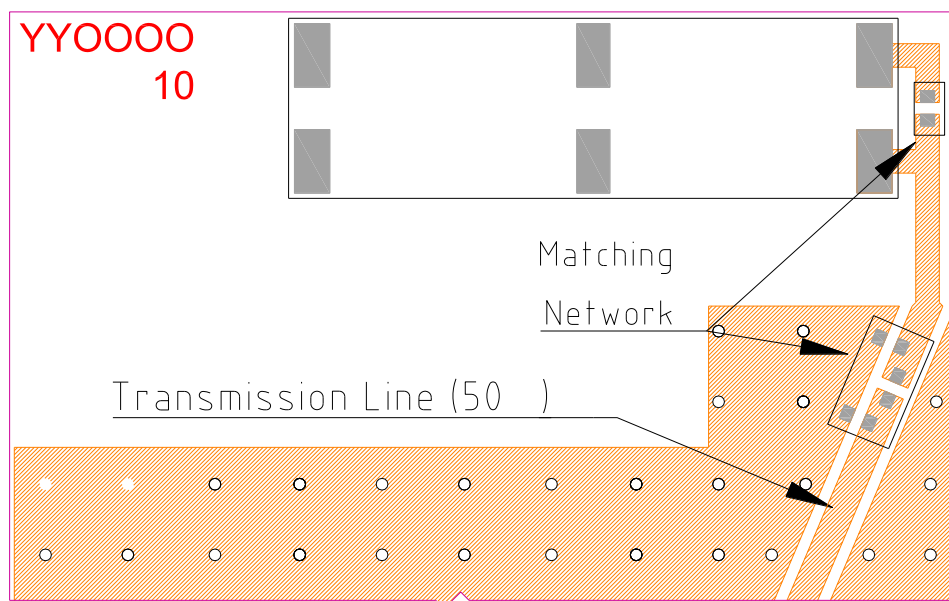

- Solder Region
- Copper Region
- Copper-Free Region


Matching network drawing

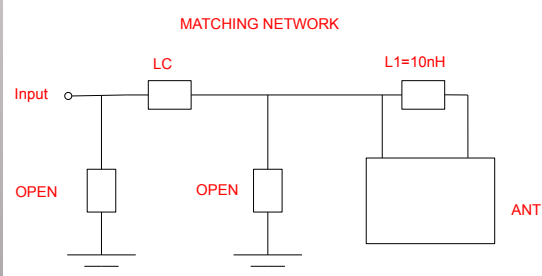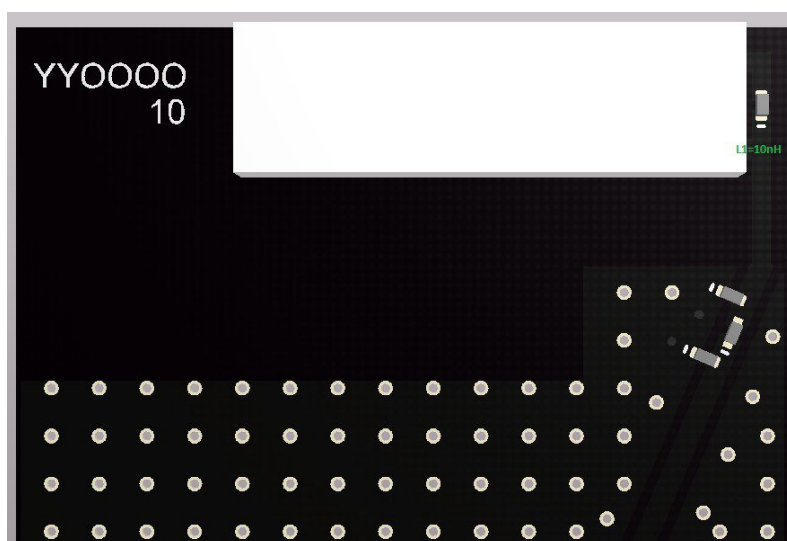

3D View of matching components and recommended values (LC = 00Ohm resistor)


6. Evaluation Board

112.7mm x 40.4mm

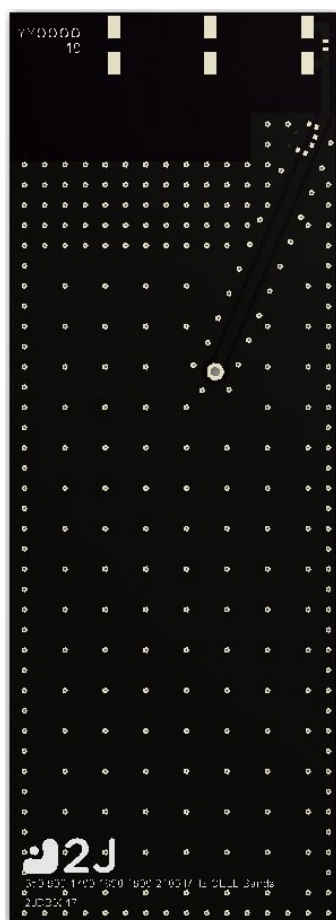


Front View without Antenna

112.7mm x 40.4mm

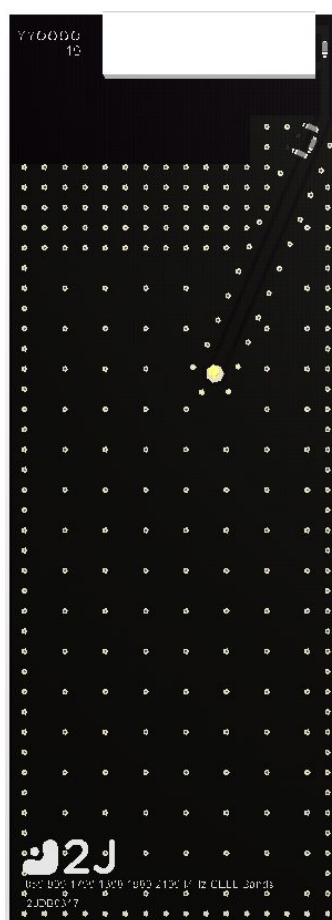

Front View with Antenna

112.7mm x 40.4mm

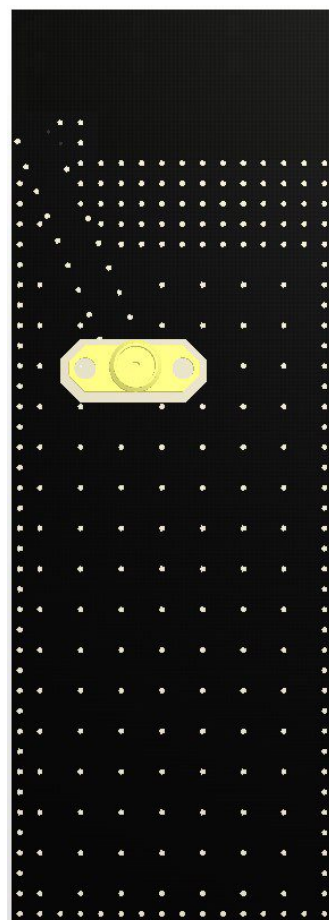

Back View

112.7mm x 40.4mm
(PCB: 0.8mm, Antenna: 3mm,
Connector: 9.5mm)




Side View

7. Packaging

PACKAGING SPECIFICATION

Antenna	2JE17
REEL	
Max Quantity per Reel	140
REEL CARTON	
Reels per Carton	10
Max Quantity per Carton	1400
Reel Carton Dimensions (cm)	40.5 x 23 x 16.5
Reel Carton Weight (Kg)	3.3
PALLET	
Max Cartons per Pallet	70
Cartons per Layer	10
Number of Layers	7
Max Quantities per Pallet	98,000
Total Cartons Dimensions (cm)	115 x 81 x 115.5
Total Cartons Weight (Kg)	231
Pallet size and weight not included above	
Typical Pallet Size (cm)	120 x 100 x 14.4
Typical Pallet Weight (Kg)	5-25

8. Tape and Reel Information

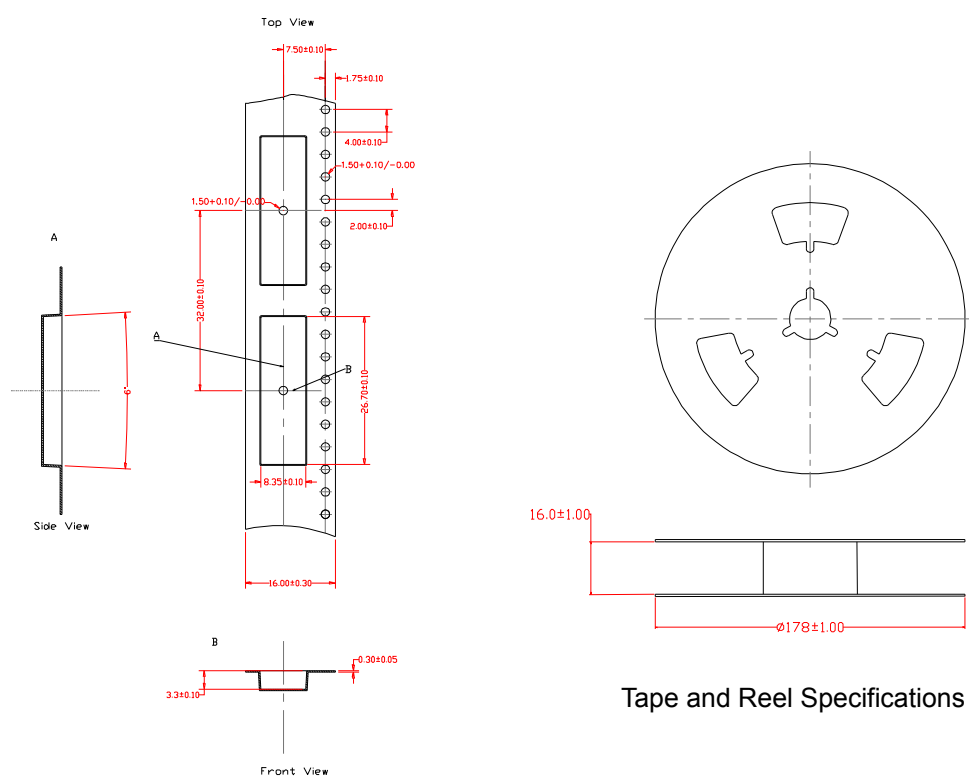


Tape and Reel Specifications

REFLOW TEMPERATURE PROFILE

Minimum Recommended Reflow Profile


	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

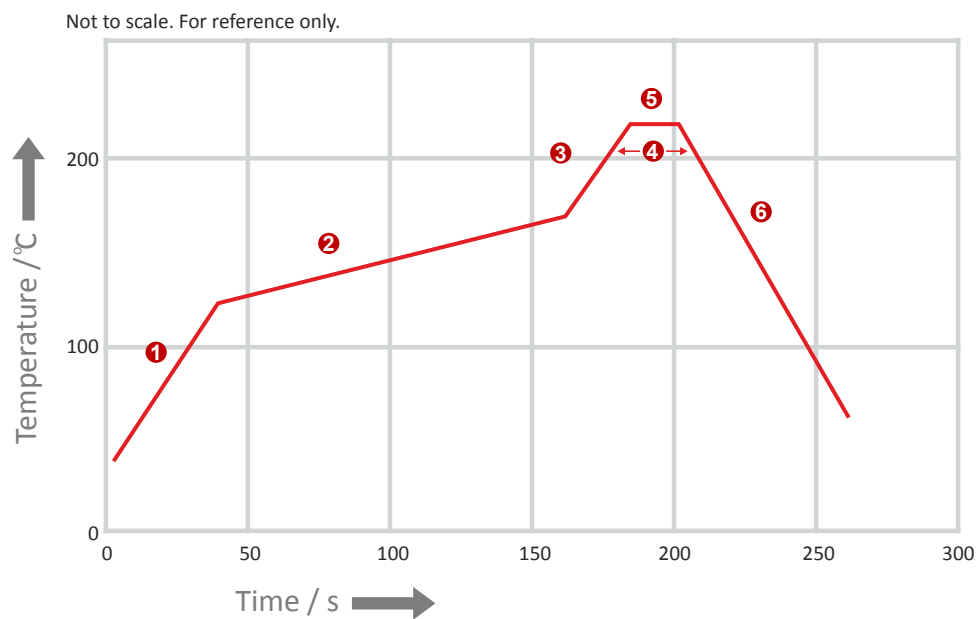


REFLOW TEMPERATURE PROFILE

Maximum Recommended Reflow Profile

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 60 sec
5	Time above 230 °C	Max 50 sec
6	Time above 250 °C	Max 10 sec
7	Peak temperature in reflow	260 °C for 5 seconds
8	Temperature gradient in cooling	Max -5 °C/s

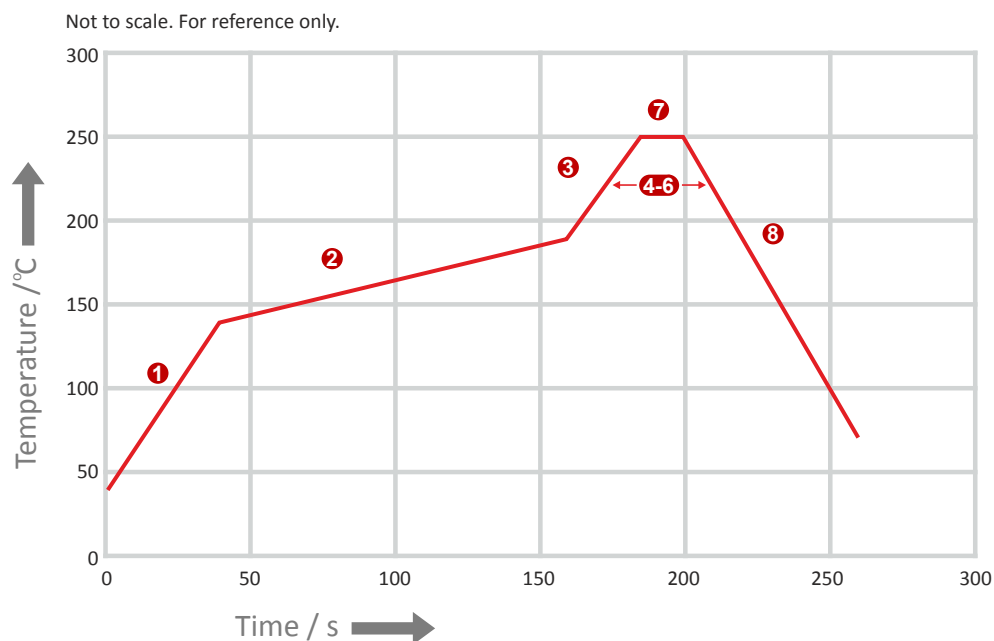

9. Antenna drawings

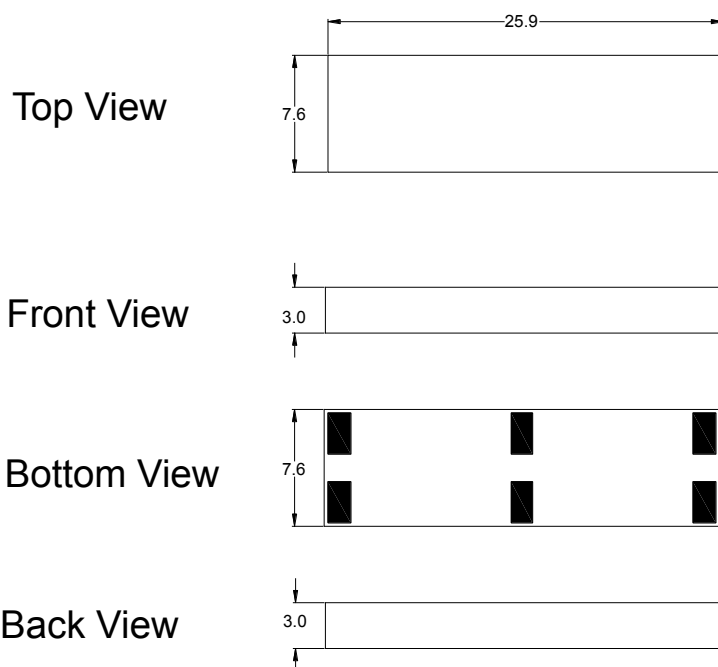

Dimensions for fiberglass antenna 25.9 x 7.6 x 3 mm

10. Antenna Images

