



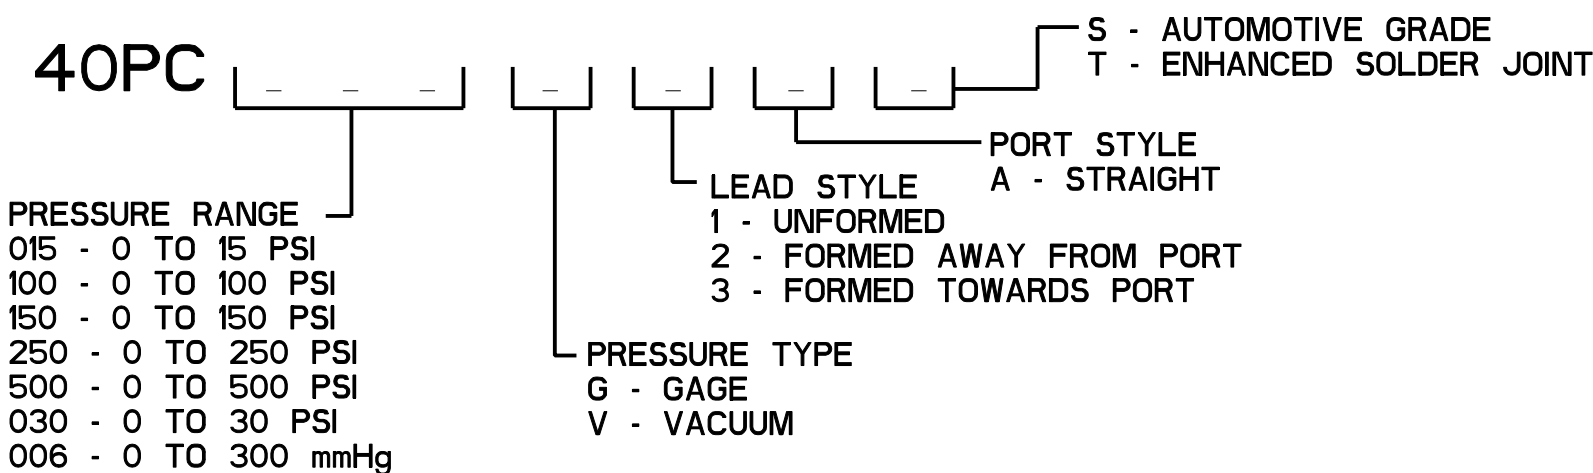

NOTES

- 1 TEMPERATURE ERROR IS THE MAXIMUM DEVIATION FROM 25°
PERFORMANCE OVER THE ENTIRE TEMPERATURE RANGE SHOWN
- 2 ACCURACY IS DEFINED AS THE 25C, RSS ERRORS FOR LINEARITY,
HYSTERESIS AND REPEATABILITY
- 3 TOTAL ACCURACY IS THE MAXIMUM DEVIATION FROM THE 25C REFERENCE
TRANSFER FUNCTION AT ANY PRESSURE OR TEMPERATURE OVER THE
SPECIFIED RANGES
- 4 OUTPUT CAN BE SHORTED TO THE POSITIVE TERMINAL OR THE GROUND TERMINAL
- 5 PRODUCT 100% TESTED AT THE -45 TO +85°C RANGE ONLY
- 6 INPUT MEDIA:
P1 - DRY GASES ONLY: MEDIA MUST BE COMPATIBLE WITH EPOXY BASED
ADHESIVE
P2 - MEDIA MUST BE COMPATIBLE WITH
GLASS, SILICON, STAINLESS STEEL, INVAR, Sn/Ni
PLATING OR Sn/Ag SOLDER
- 7 PINS 4, 5 OR 6 ARE INTERNAL DEVICE CONNECTIONS, DO NOT CONNECT
TO EXTERNAL CIRCUITRY OR GROUND. EXCEPT FOR AUTOMOTIVE GRADE
- 8 PRODUCT TESTED AT 250 PSI
- 9 500 PSI HAS A BURST PRESSURE UP TO 1250 PSI



THIRD ANGLE PROJECTION		
SCALE	4 : 1	
DO NOT SCALE PRINT		
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	+ .030
TWO PLACE	(.00)	+ .015
THREE PLACE	(.000)	+ .005
ANGLES		+
WEIGHT		

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
FED. MFG. CODE 91929		CATALOG LISTING
MICRO SWITCH a Honeywell Division	PRESSURE SENSOR	40PC SERIES CHART