


Chip-Carrier-Sockel Chip-carrier-sockets

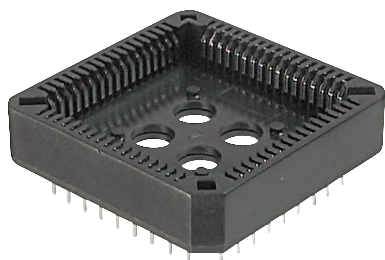

Isolierkörper

PBT, UL 94V-0

Kontakte

Phosphorbronze, verzinnt

Betriebsstrom

1A

Isolationswiderstand

10000MΩ min.

Durchschlagsspannung

1000V AC

Kontaktwiderstand

15mΩ max.

Betriebstemperatur

-40°C bis +105°C

Insulator

PBT, UL 94V-0

Contacts

Phosphor bronze, tin plated

Current rating

1A

Insulating resistance

10000MΩ min

Withstanding voltage

1000V AC




Contact resistance

15mΩ max

Operating temperature

-40°C bis +105°C

No. of Contacts	Qty per tube	Dimension			
		A	B	C	D
20	39	15,50	15,50	5,08	5,08
28	33	18,05	18,05	7,62	7,62
32	29	18,05	20,60	7,62	10,16
44	25	23,50	23,50	12,70	12,70
52	23	25,88	25,88	15,24	15,24
68	19	31,66	31,66	20,32	20,32
84	16	36,66	36,66	25,40	25,40

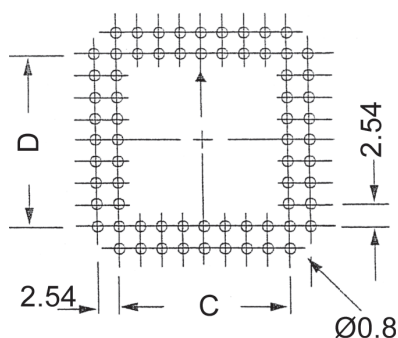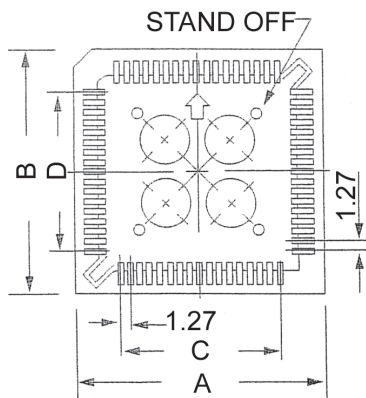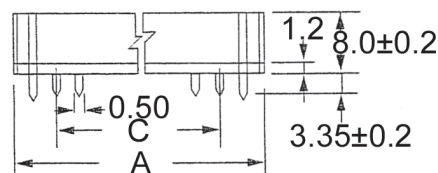

Bestellcode: **A - CCS - x - x - T**
Ordercode :

Bitte „x“ durch die unten geeignete Option ersetzen
Please replace „x“ with appropriate option listed below

1. 2.

1.

Polzahl

20, 28, 32, 44, 52, 68, 84

No. of contacts

20, 28, 32, 44, 52, 68, 84

2.

Oberfläche

Z -Zinn*
G -Gold

Finish

Z -tin*
G -gold

Ausziehwerkzeug

A-EX-T

Extraction tool

A-EX-T



* Standard