

PNP Silicon Planar Transistor


BF 926

SIEMENS AKTIENGESELLSCHAFT

04554 D

BF 926 is an epitaxial PNP silicon planar transistor in TO 92 plastic package (10 A 3 DIN 41868). The transistor is intended for use in VHF oscillator stages, in particular for driving MOS mixer stages.

Type	Ordering code
BF 926	Q62702-F 678

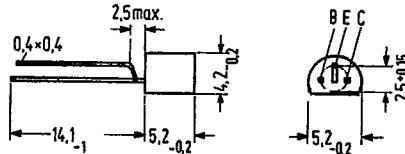

Approx. weight 0.25 g

Dimensions in mm

Maximum ratings

Collector-emitter voltage	$-V_{CEO}$	30	V
Collector-base voltage	$-V_{CBO}$	40	V
Emitter-base voltage	$-V_{EBO}$	4	V
Collector current	$-I_C$	25	mA
Emitter current	$-I_E$	30	mA
Junction temperature	T_J	150	°C
Storage temperature range	T_{stg}	-55 to +150	°C
Total power dissipation ($T_{amb} = 45^\circ\text{C}$)	P_{tot}	300	mW

Thermal resistance

Junction to ambient air	R_{thJA}	<350	K/W
-------------------------	------------	------	-----

25C D ■ 8235605 0004555 2 ■ SIEG
L7C 04555 D

T-31-17
BF 926

SIEMENS AKTIENGESELLSCHAFT

Static characteristics ($T_{amb} = 25^\circ C$)

Collector cutoff current

($-V_{CB} = 20$ V)

Collector-emitter breakdown voltage

($-I_C = 2$ mA)

Collector-base breakdown voltage

($-I_C = 10$ μ A)

Emitter-base breakdown voltage

($-I_E = 10$ μ A)

DC current gain

($-I_C = 1$ mA; $-V_{CE} = 10$ V)

$-I_{CBO}$	< 60	nA
$-V_{CEO}$	> 30	V
$-V_{CBO}$	> 40	V
$-V_{EBO}$	> 4	V
h_{FE}	80 (> 30)	-

Dynamic characteristics ($T_{amb} = 25^\circ C$)

Transition frequency

($-I_C = 5$ mA; $-V_{CE} = 10$ V; $f = 100$ MHz)

Reverse transfer capacitance

($-V_{CB} = 10$ V; $-I_C = 5$ mA; $f = 1$ MHz)

Output capacitance

($-I_E = 0$; $-V_{CB} = 10$ V; $f = 1$ MHz)

Input capacitance

($-V_{EBO} = 0.15$ V; $NF = 1$ MHz)

f_T	600	MHz
$-C_{12a}$	0.6	pF
C_{OB}	0.8	pF
C_{EBO}	2	pF

601

1963

G-12