

Rating	30A
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Color	Red

Material:


Plug: brass with nickel plated.

Handle: PVC.

Fits $\phi 4$ mm banana plug or O.D. less $\phi 4$ mm wire by soldering, please cut the end of PVC handle to fit wire's diameter.

Fits $\phi 4$ mm standard banana socket.

RoHS compliance.

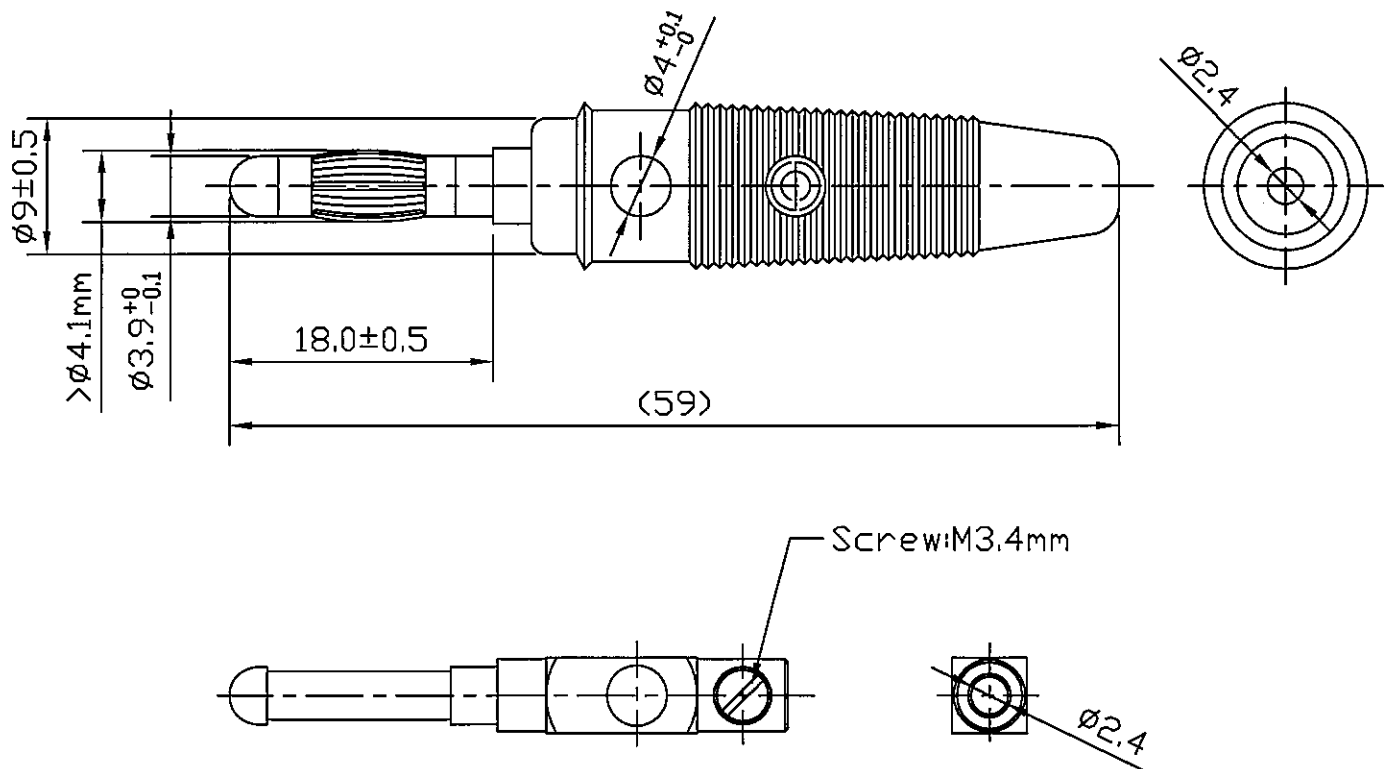

C8\R13\R8-25A(1540093)

									△
									△
Date	Name		Description						No.
Drawn	Checked	Approved	SCI BOM No	1540093	Model Name	BANANA PLUGS			
曹盈芳		<i>[Signature]</i>	RadioShack NO	2740045	Model No.	R8-25A			Rev.
04/03/'12	"	4/5/12	Unit	mm	Shin Chin Industrial Co., Ltd.				0