


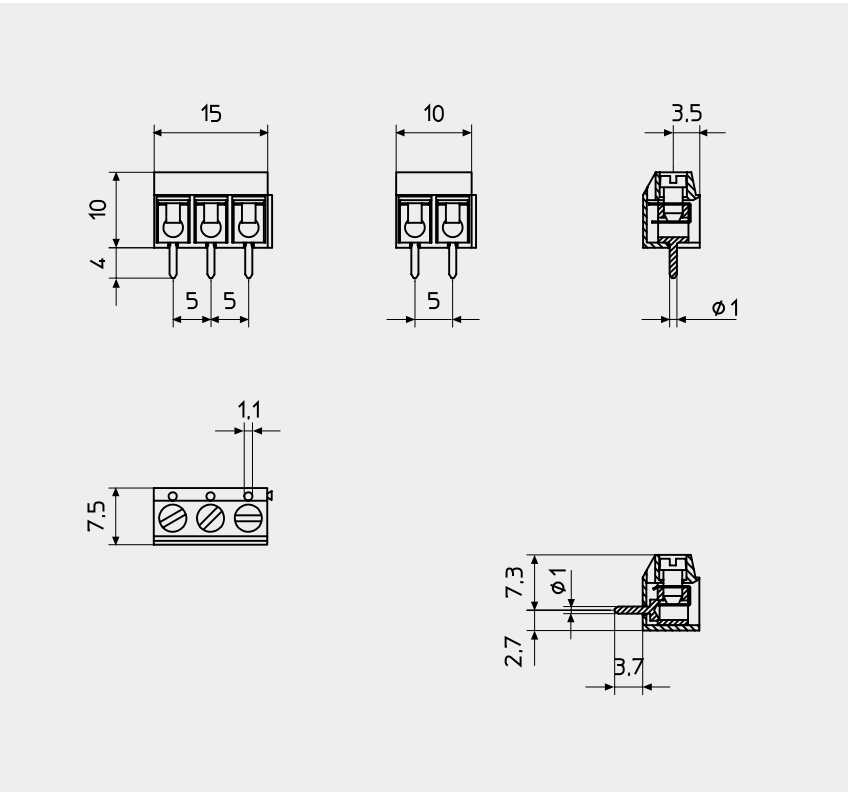

MODULI COMPONENTI
A LINGUETTA
2/3 POLI

WITH WIRE PROTECTION
MODULES
2/3 POLES

BORNE AVEC LINGUETTE
ELEMENTS
2/3 POLES

MIT DRAHTSCHUTZ
ANREIHBAR
2/3 POLIG



Corpo isolante Grigio	Insulating body Grey	Corps isolant Gris	Isolierkörper Grün	PC UL94VO
Vite	Screw	Vis	Schraube	M 2,5-C 18B + ZN
Morsetto	Clamp	Borne	Klemmkörper	CuZn 40 Pb2 + Ni + Sn
Linguetta di protezione	Tab for wire protection	Linguette de protection	Drahtschutz	CuZn 37 + Sn
Coppia di torsione	Testing torque	Couple de serrage	Zul. Drehmoment	0,4 Nm
Sezione	Section	Section	Querschnitt	1,0 mm²
Foro di montaggio	P.C.B. mounting hole	Perçage C. I.	Leiterplattenbohrung	Ø 1,3 mm
Corrente nominale	Nominal current	Courant nominal	Strombelastbarkeit	13,5 A
Tensione	Voltage	Tension	Betriebsspannung	250/750 V
Temperatura	Temperature	Température	Temperatur	85° C
Grado di protezione	Protection index	Degré de protection	Schutzklasse	IP 00
Resistenza di isolamento	Insulation resistance	Résistance d'isolement	Isolationswiderstand	≥ 5 M Ω
Rigidità dielettrica	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	≥ 2000 Vac/60"

