


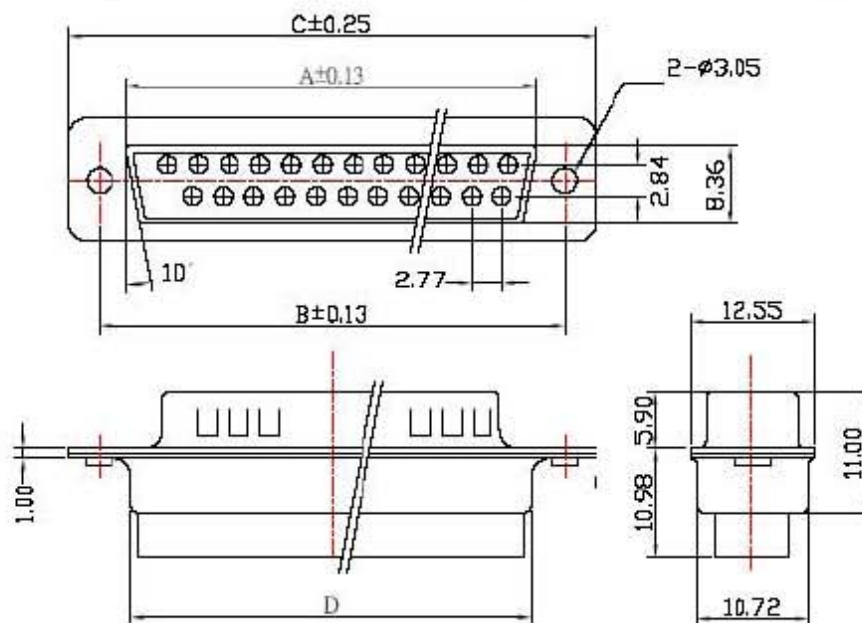

# SPECIFICATION

Electric

Current Rating: 5Amp

Insulator Resistance: 1000M ohm Min.  
(At 500V DC)

Dielectric Strength: 1000V For One Minute  
Temperature:  $-55^\circ\text{C} \sim +105^\circ\text{C}$

## MATERIAL&FINISH

Shell: Insulator Glass Filled Nylon

Stell: Zinc Plated Or Tin Plated

Pin Contact: Brass, Gold Plated Over Nickel

| Shell Size | A     | B     | C     | D     |
|------------|-------|-------|-------|-------|
| 9M         | 16.92 | 24.99 | 30.81 | 19.28 |
| 15M        | 24.25 | 33.32 | 39.14 | 27.51 |
| 25M        | 38.96 | 47.04 | 53.04 | 41.30 |
| 37M        | 55.42 | 63.50 | 69.32 | 57.71 |

**T&T** Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2:1

D-SUB CRIMPING HOUSING  
(MALE)

制表日: 2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

JEFFREY

$\pm 0.3$

A