


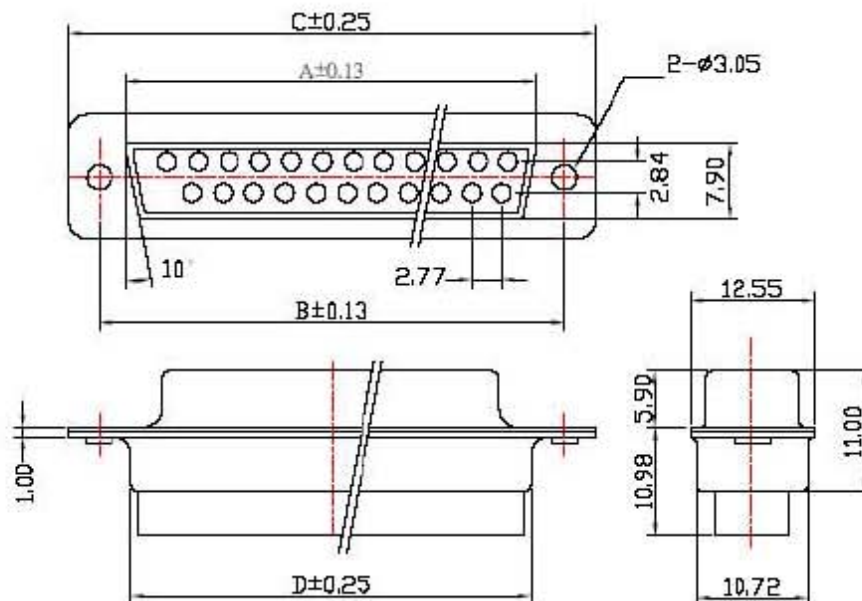

SPECIFICATION

Electric

Current Rating: 5Amp

Insulator Resistance: 1000M ohm Min.
(At 500V DC)

Dielectric Strength: 1000V For One Minute
Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIAL&FINISH

Shell: Insulator Glass Filled Nylon

Stell: Zinc Plated Or Tin Plated

Pin Contact: Brass, Gold Plated Over Nickel

Shell Size	A	B	C	D
9F	16.33	24.99	30.81	19.28
15F	24.66	33.32	39.14	27.51
25F	38.38	47.04	53.04	41.30
37F	55.84	63.50	69.32	57.71

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

2:1

D-SUB CRIMPING HOUSING
(FEMALE)

制表日: 2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

JEFFREY

± 0.3

A