
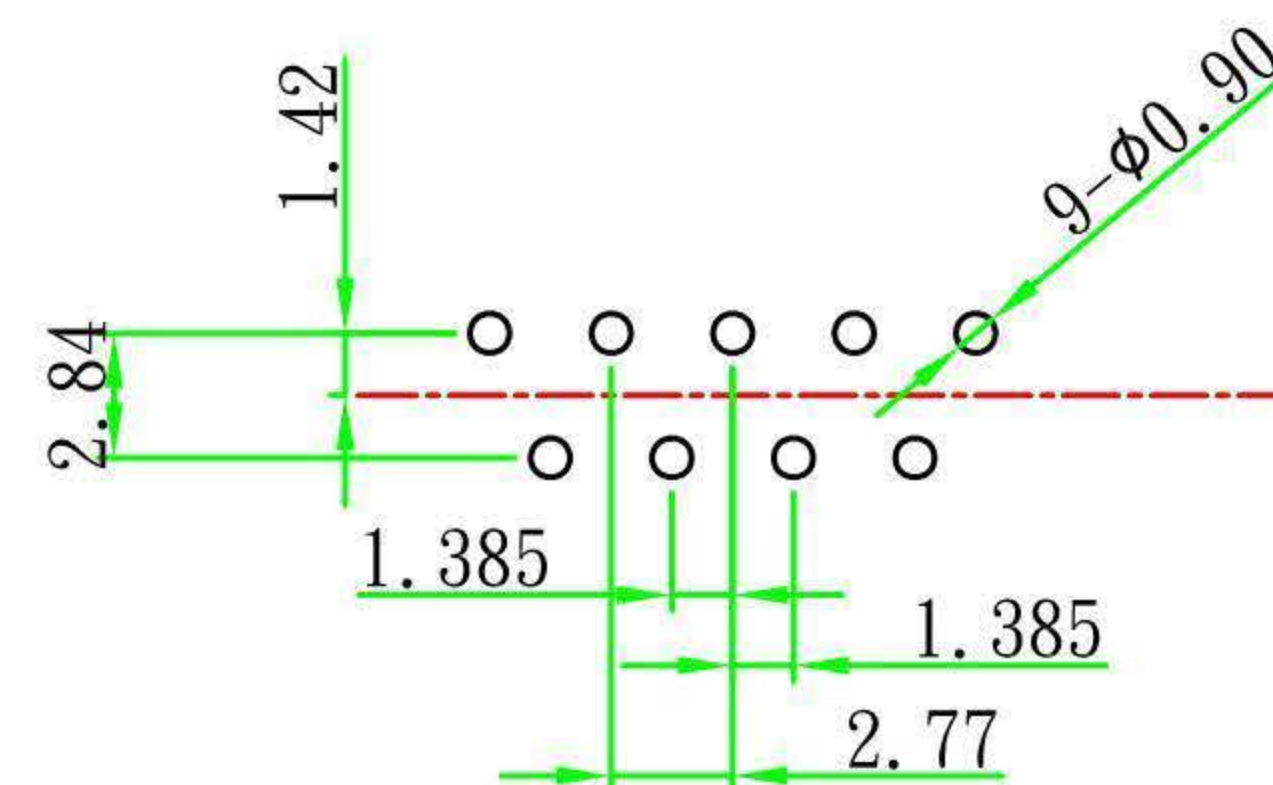
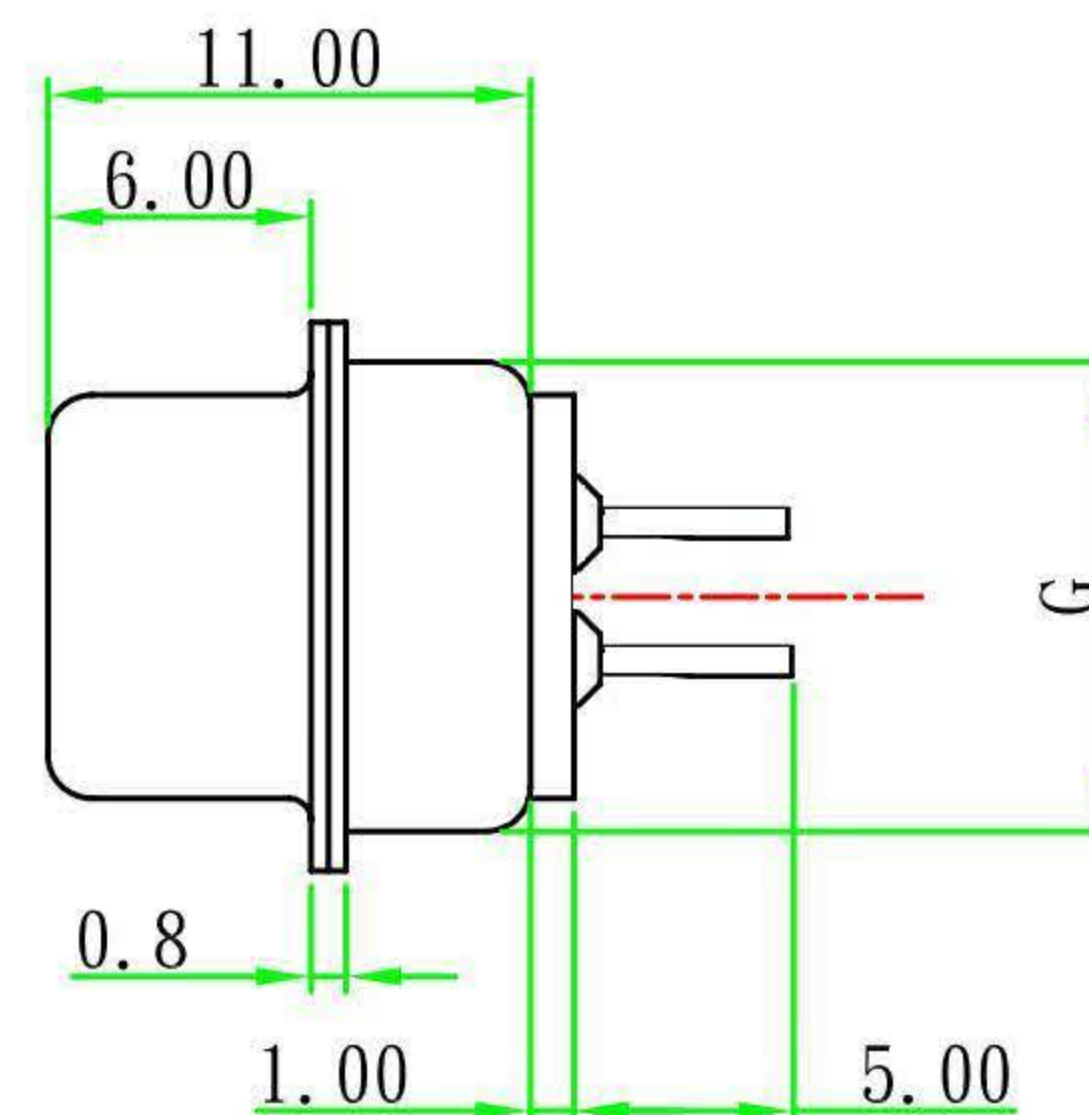
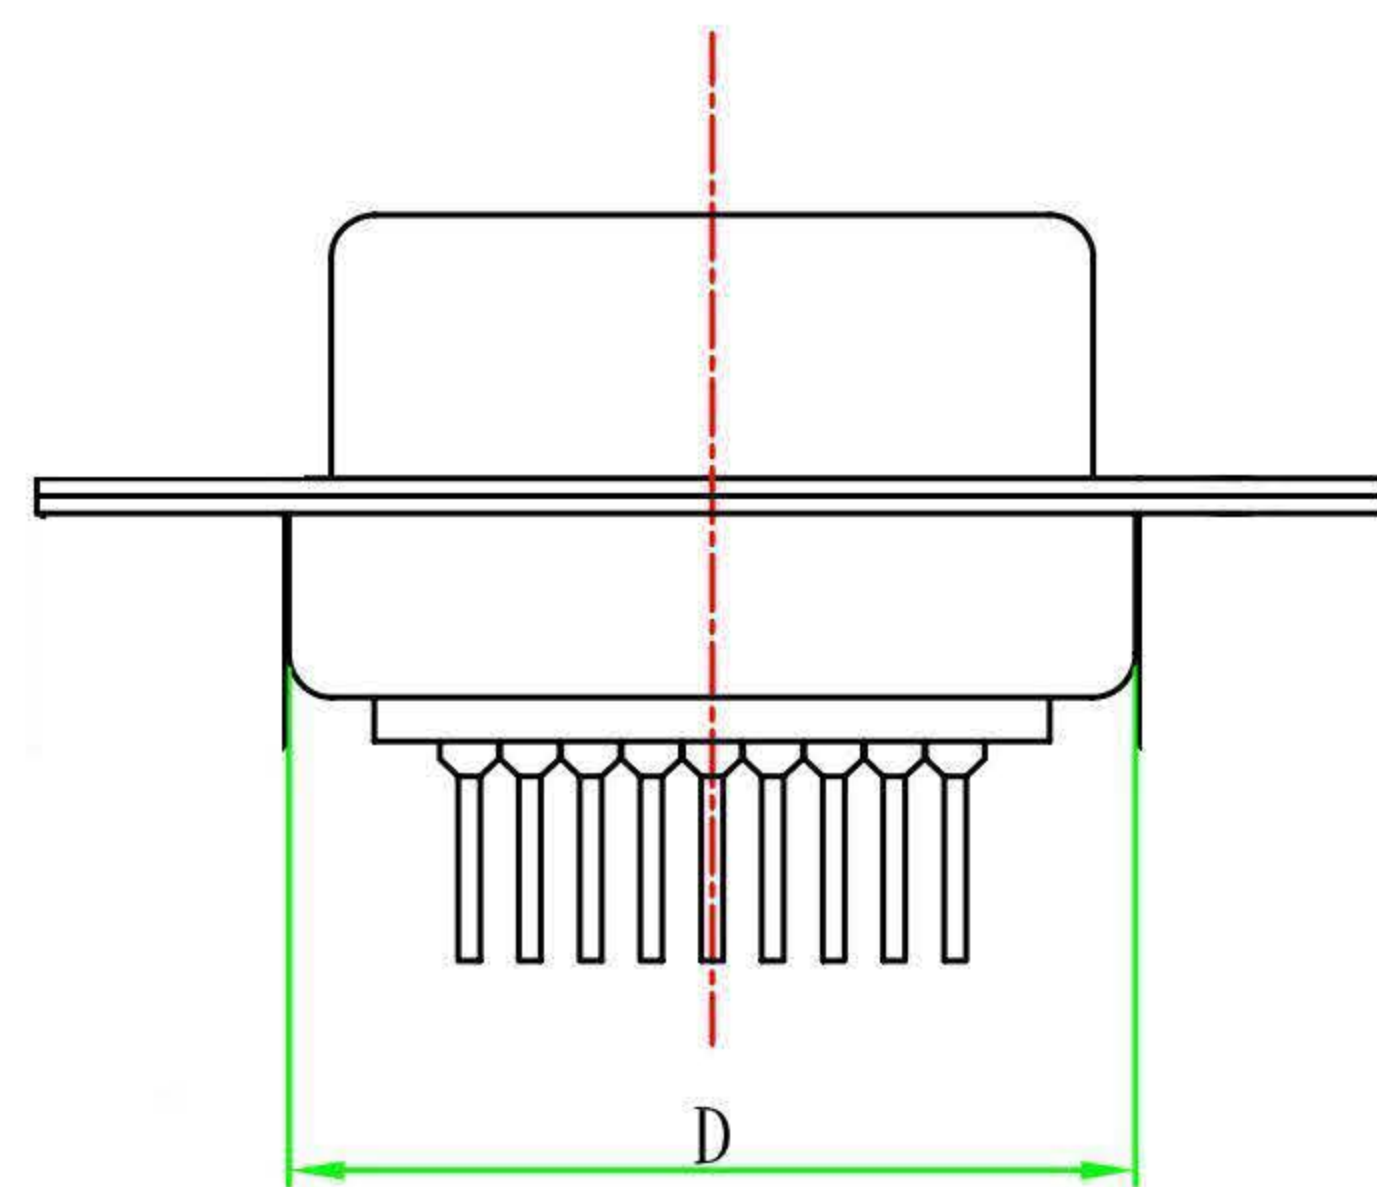


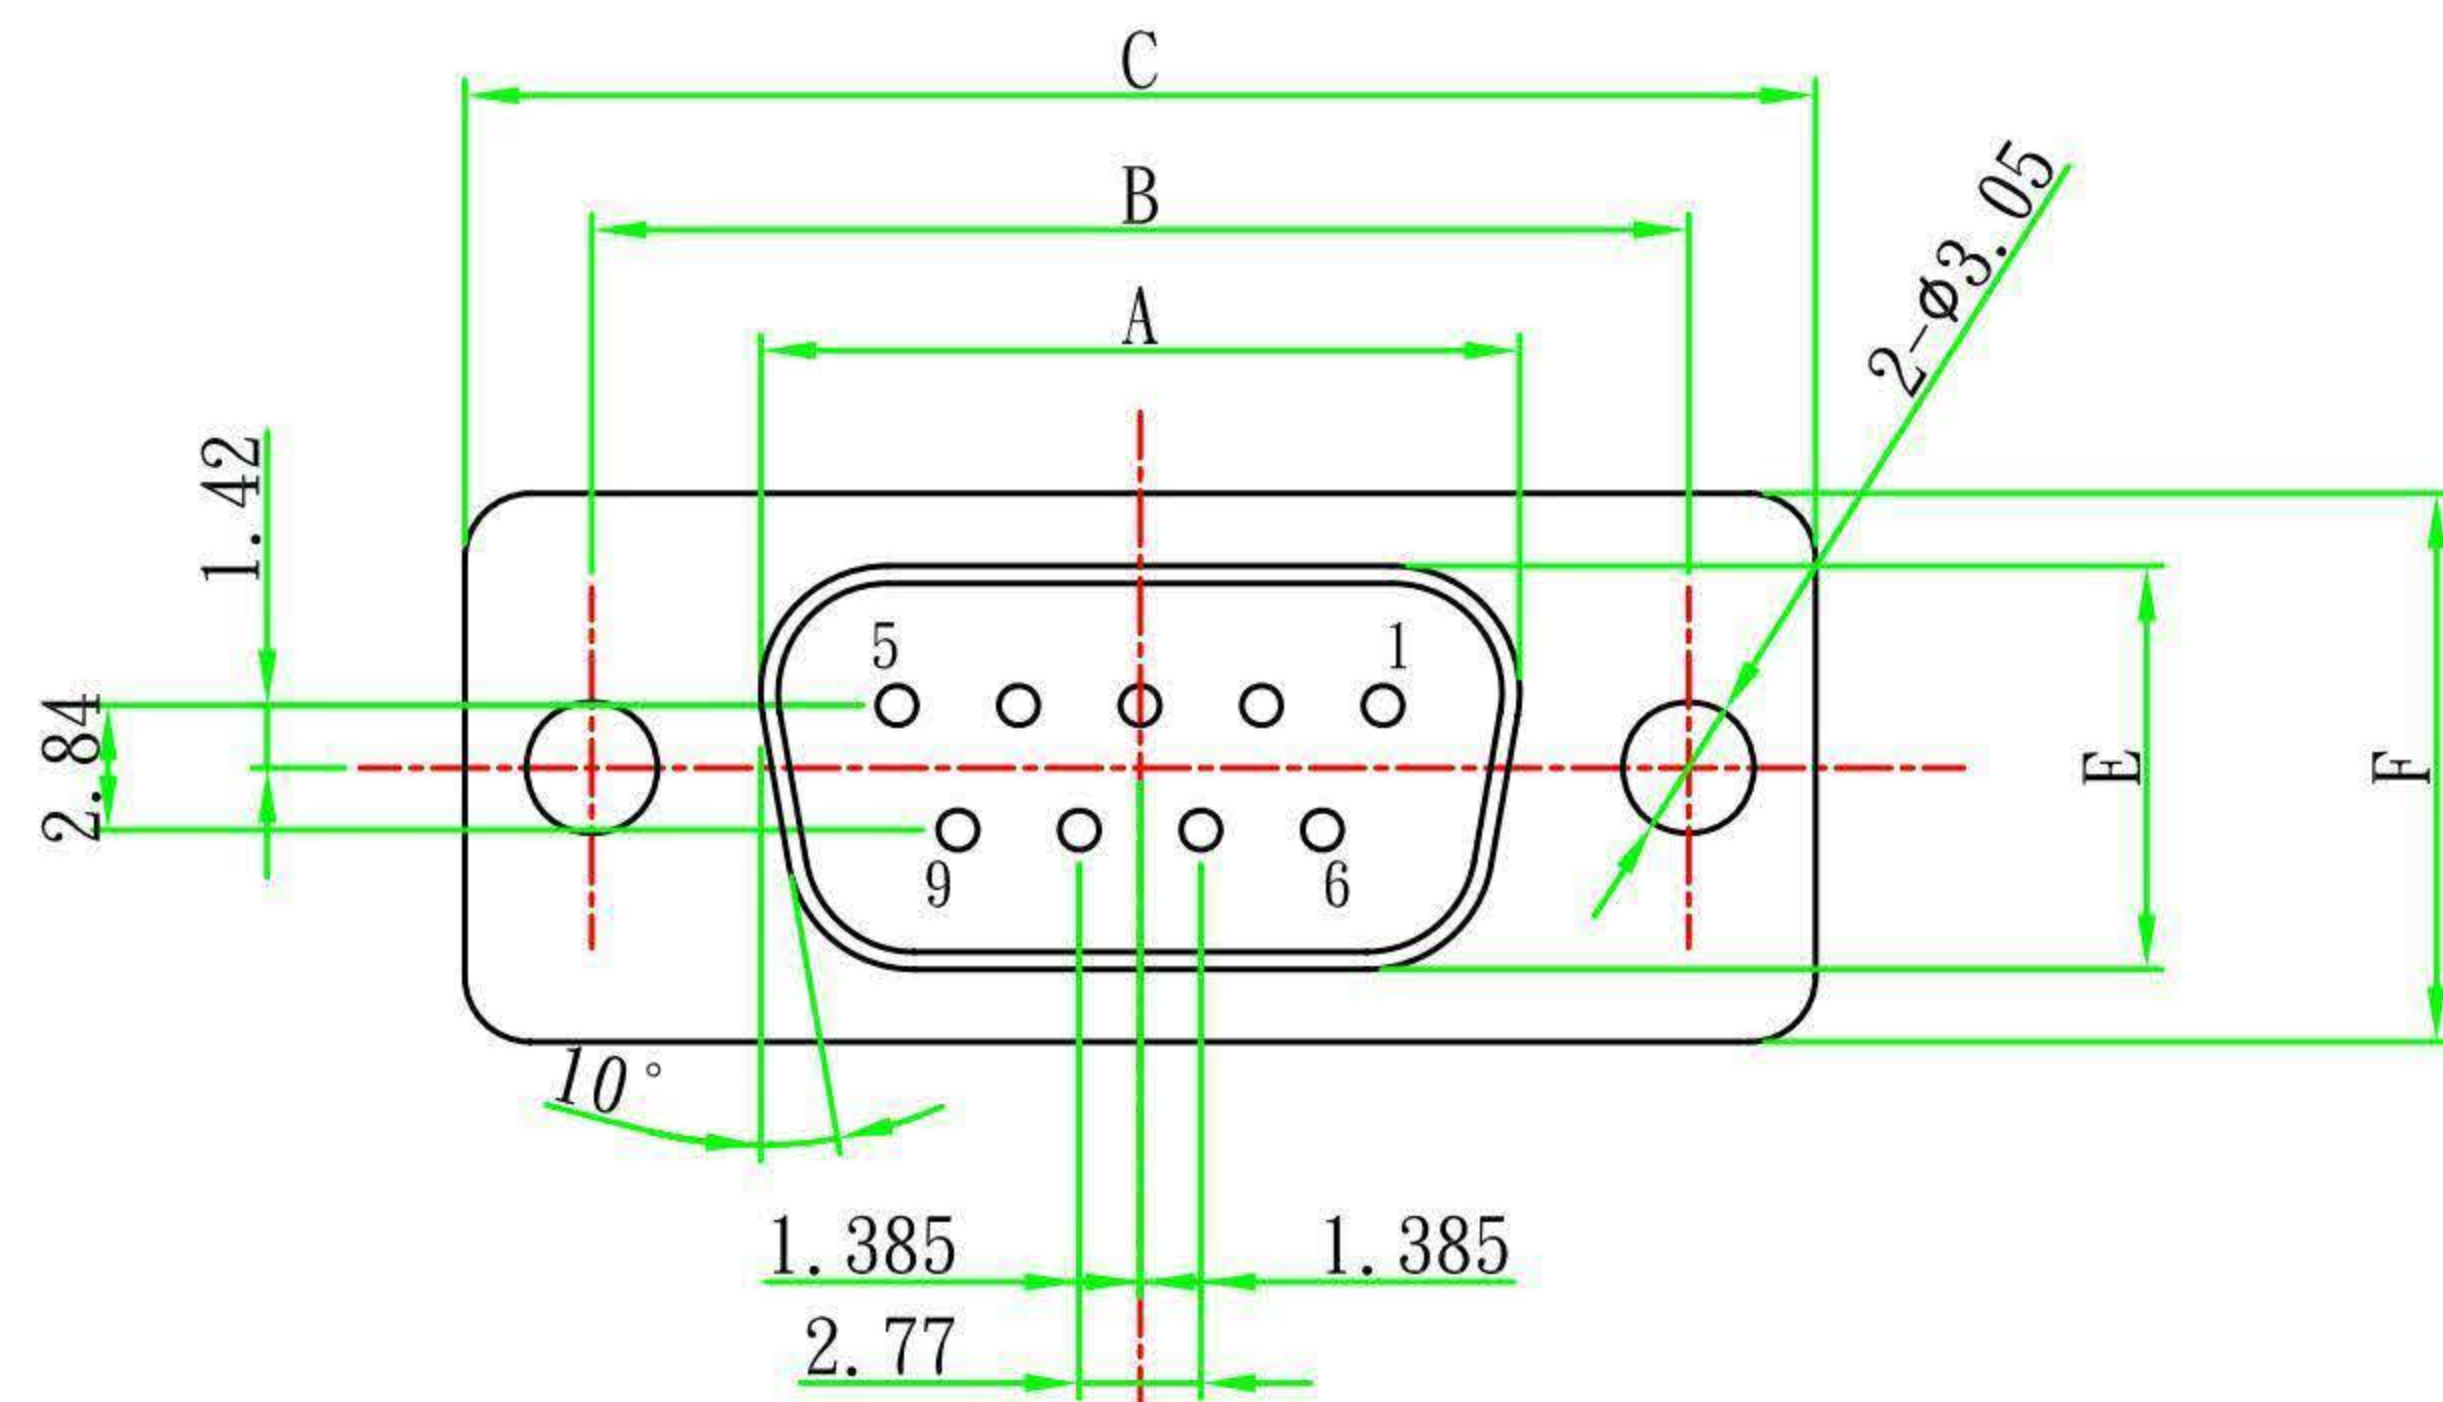

P. C. BOARD LAYOUT

MATERIAL:

Insulator: PBT+30% Glass Fiber(UL94V-0)

Contacts: Phosphor Bronze or Brass(Standard it Brass)

Contact Plated: Gold over Nickel

Shell: Steel, Nickel plated or Tin plated

SPECIFICATION:

Current Rating: 5Amps

Insulation Resistance: 1000MΩ Min. at 500V DC

Withstanding Voltage: 500V AC/minute

Operating Temperature: -40°C ~ +105°C

M/F \ DIM	A	B	C	D	E	F	G
09	16.30	25.00	30.80	19.30	7.90	12.50	10.70
15	24.70	33.30	39.10	27.50	7.90	12.50	10.70
25	38.40	47.00	53.00	41.30	7.90	12.50	10.70
37	54.80	63.50	69.30	57.70	7.90	12.50	10.70
50	52.40	61.10	66.90	55.30	10.80	15.40	13.60

**RoHS
Compliant**

T&T Connection System Co., Ltd.

APPD.



SCALE 参考

DWG.

Helen

UNIT M M

DATE

2015/2/6

PAGE 1 OF 1

TOLERANCE

.0 ± 0.25
.00 ±
ANG. ±

SIZE.

A 4

REV.

B

PART NAME 品名

DSUB FEMALE PCB STRAIGHT RoHS

PART NO.

料 號

DB-xxDS