

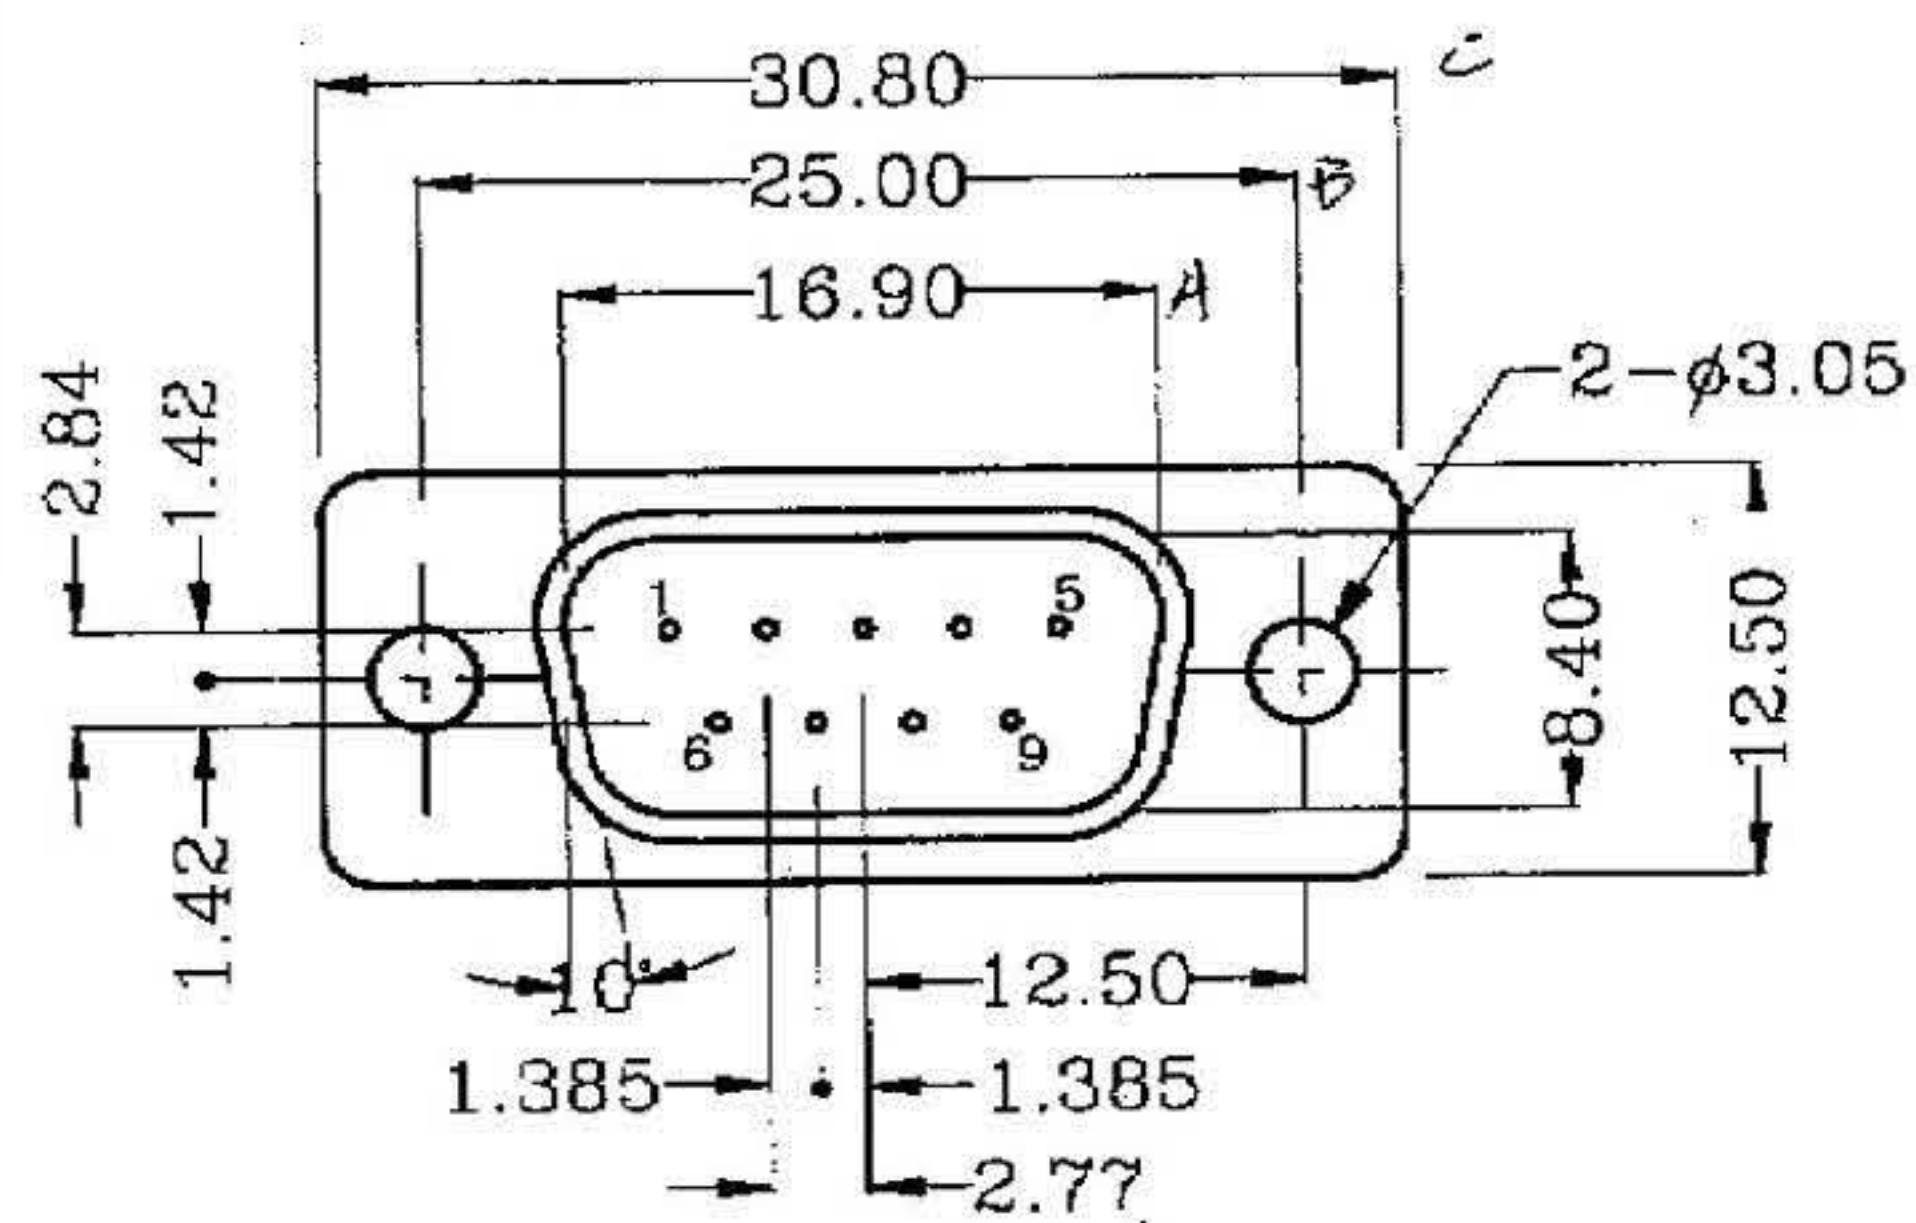


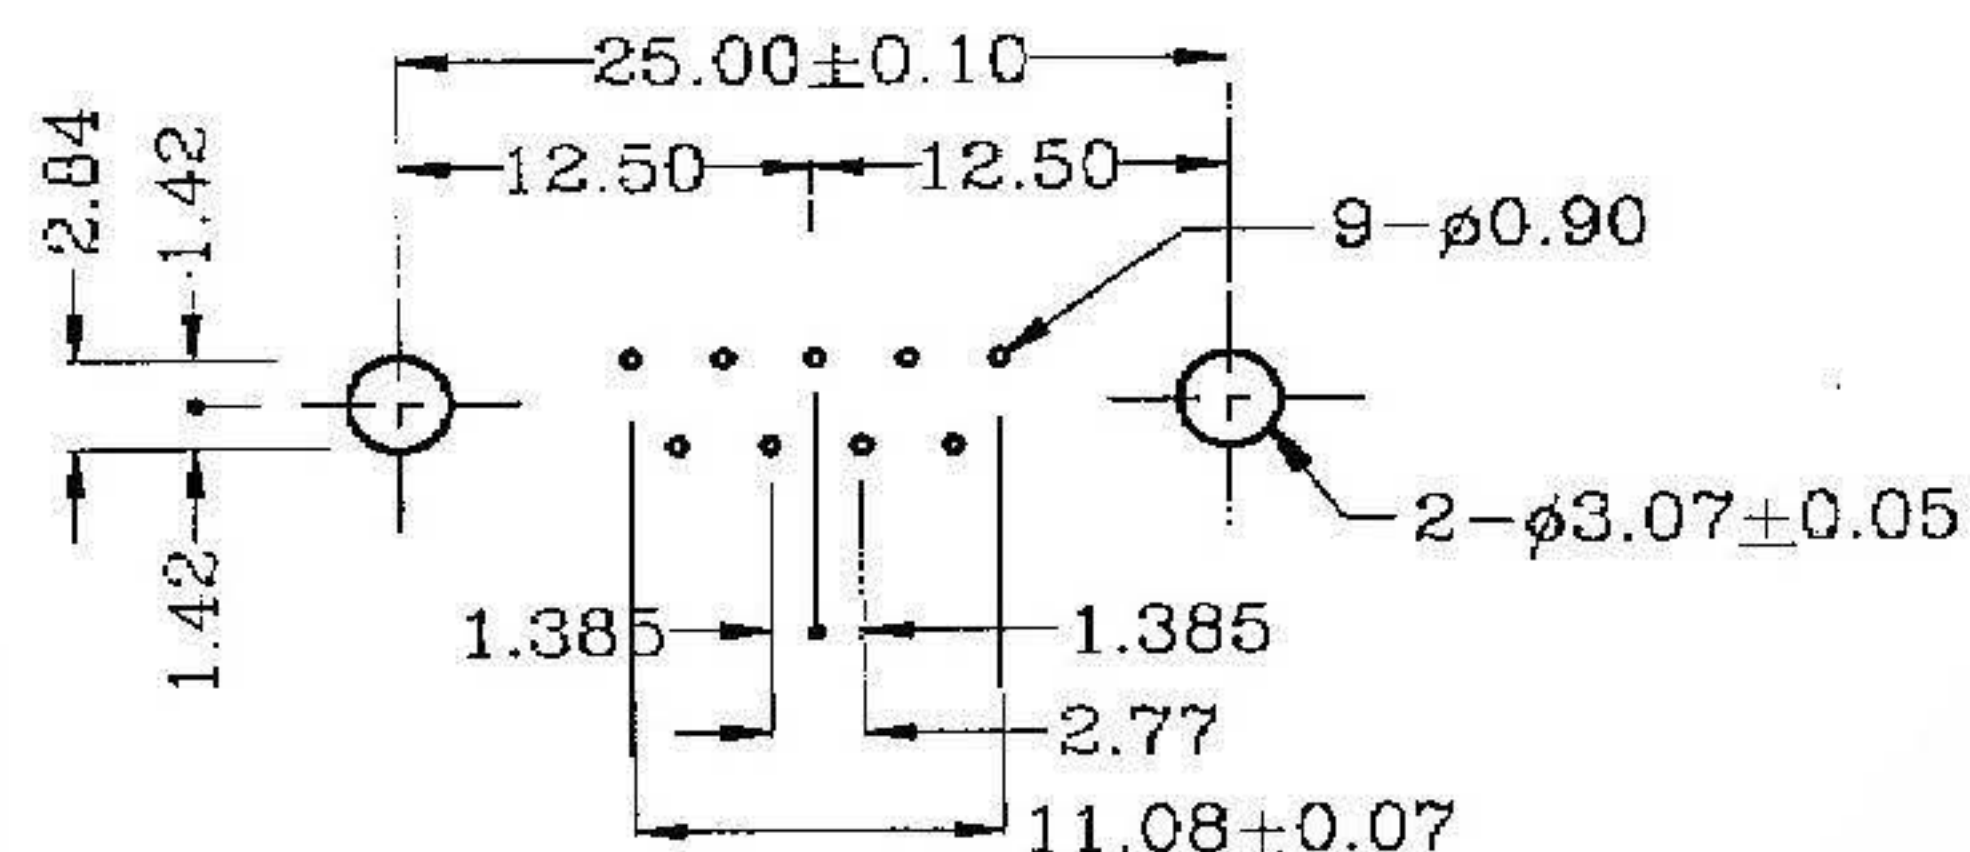

Material :
Insulator : Glass-Filled Thermoplastic PBT, UL94V-0 rated
Contact : Brass
Shell : Steel, refer to ordering information for plating
Clinch Nut : Brass, 100u" min Nickel Plated.
Screwlock : Brass, 100u" min Nickel Plated.

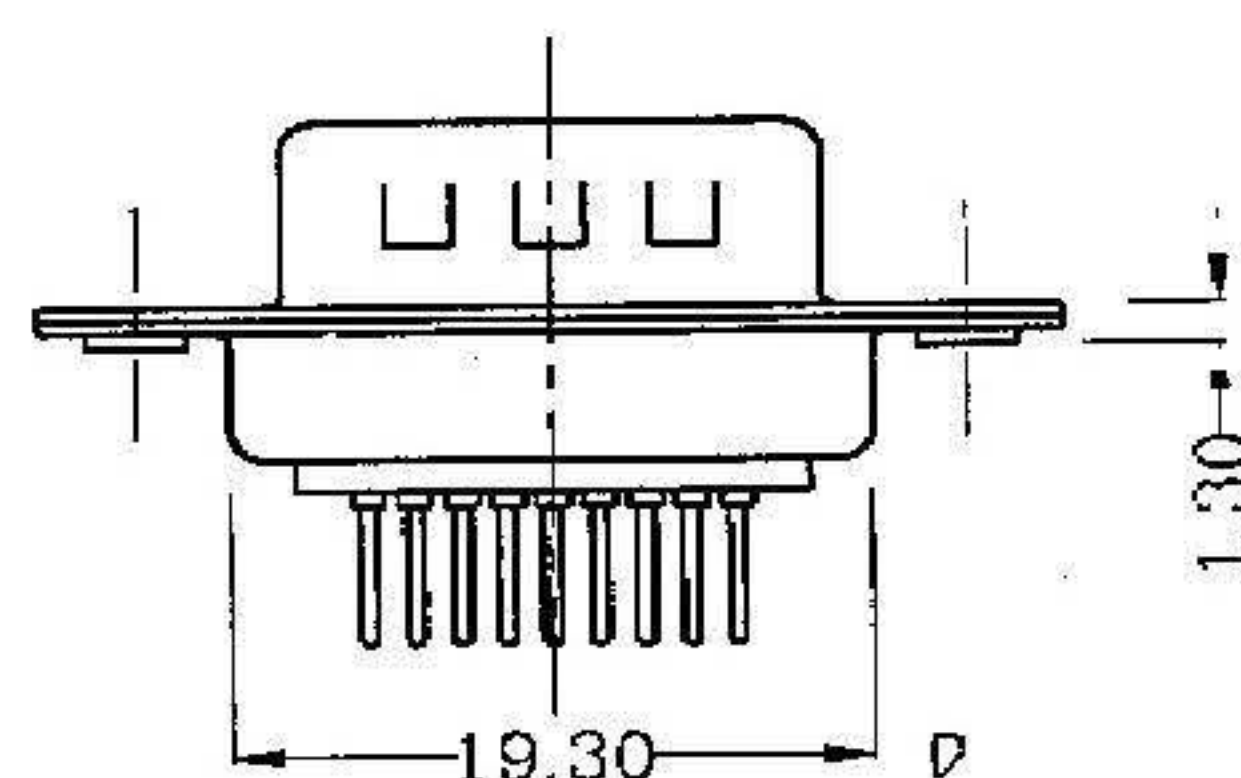

SHELL SIZE	9P	15P	25P	37P	50P
A	30.80	39.10	53.00	69.30	66.90
B	25.00	33.30	47.00	63.50	61.10
C	16.90	25.30	39.00	55.40	52.80
D	19.30	27.50	41.30	57.70	55.30

**RoHS
Compliant**

T&T Connection System Co., Ltd.

APPD.
核准



	TOLERANCE
--	------------------

容許公差 0.05

DWG.
製圖

Helen

SCALE 比例	参考
-------------	----

UNIT 單位	MM
------------	----

PAGE 1 OF 1

SIZE.
紙張尺寸 A4

REV. 版次 A

PART NAME	品名
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

DSUB MALE PCB STRAIGHT RoHS

PART NO.

PART NO. DB-xxDP
料 號

P.C BOARD LAYOUT