
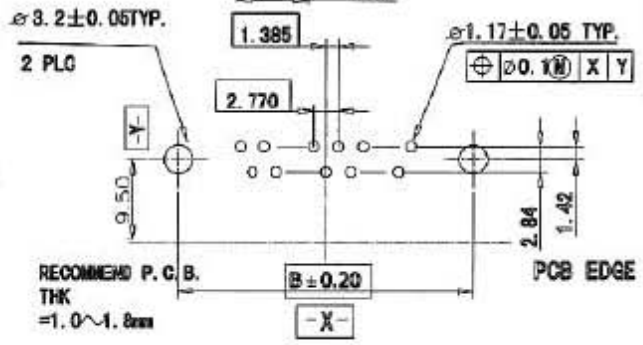

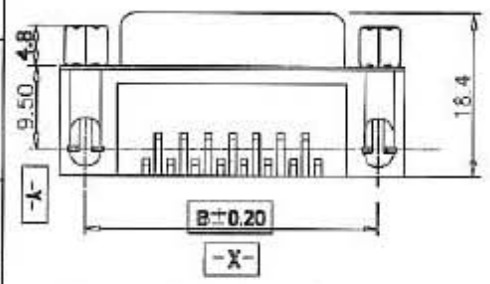


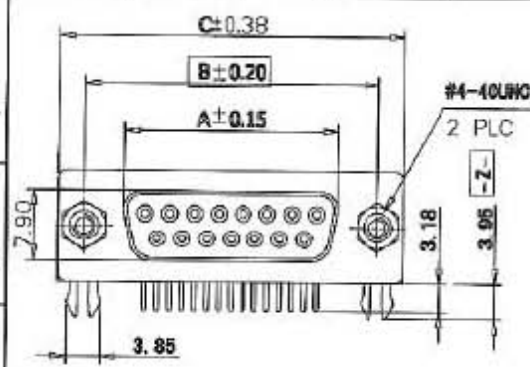

SPECIFICATION

Electric

Current Rating: 3 Amp
 Dielectric Strength: 500V For One Minute
 Insulator Resistance: 1000Megohms min .at 500V DC
 Contact Resistance: 25 Milliohms Max.
 Temperature: -55° C~+105° C

Mechanical Characteristic

Contact Insertion Force: 34lg. Maximum.
 Contact Separation Force: 2lg. Minimum.

Material

Pin Contact: Brass
 Insulator: PBT, UL94V-0
 Stell: SPCC.

No.	A	B	C
09	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.83	63.50	69.32

T&T Connection System Co., Ltd.

UNIT

SCALE

PART NAME

MM

1.5 : 1

D-SUB PCB 90° 7.2mm Female
 Boardlock+Fix 4.8X11.8mm Screws

制表日: 2002/12/04

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

JEFFREY

± 0.3

A