


Clamper/Damper Glass Passivated Rectifier

Reverse Voltage 1400 to 1500V
Forward Current 3.0A

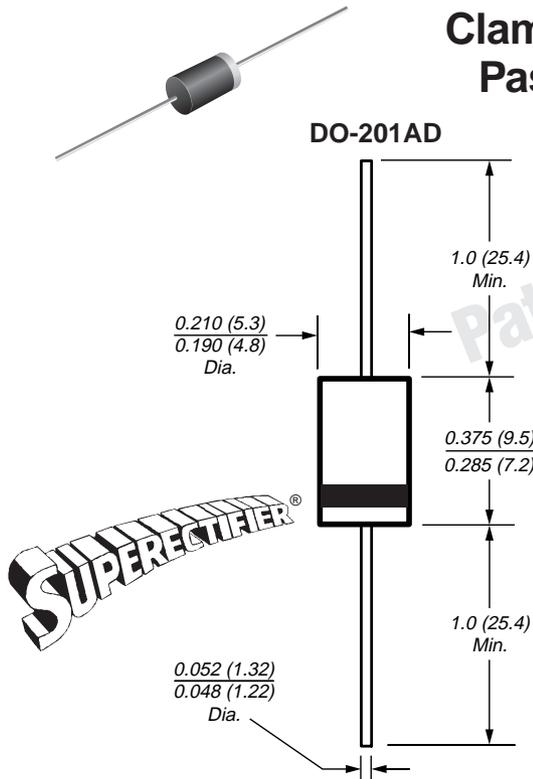

Dimensions
in inches and
(millimeters)

*Glass-plastic encapsulation technique is covered by
Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306

Features

- Specially designed for clamping circuits, horizontal deflection systems and damper applications
- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- 3.0 ampere operation at $T_A=50^\circ\text{C}$ with no thermal runaway
- Typical I_R less than $0.1\mu\text{A}$
- Capable of meeting environmental standards of MIL-S-19500
- High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375 " (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-201AD, molded plastic over glass body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.04 oz., 1.12 g

Packaging codes/options:

1/Bulk - 1.5K per container, 15K per box

4/1.4K per 13" reel, 5.6K per box

23/1K per ammo mag., 9K per box

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	CGP30	DGP30	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	1400	1500	V
Maximum RMS voltage	V_{RMS}	980	1050	V
Maximum DC blocking voltage	V_{DC}	1400	1500	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 50^\circ\text{C}$	$I_{F(AV)}$	3.0		A
Peak forward surge current 8.3ms single half sine wave superimposed on rated load (JEDEC Method) at $T_A = 50^\circ\text{C}$	I_{FSM}	100		A
Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length at $T_A = 70^\circ\text{C}$	$I_{R(AV)}$	200		μA
Typical thermal resistance (Note 1)	$R_{\theta JA}$	20		$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175		$^\circ\text{C}$

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	CGP30	DGP30	Unit
Maximum instantaneous forward voltage at 3.0A	V_F	1.2		V
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 100^\circ\text{C}$	I_R	5.0 100		μA
Maximum reverse recovery time at $I_F = 0.5\text{A}$, $I_R = 50\text{mA}$	t_{rr}	15	20	μs
Maximum reverse recovery time at $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$ typical maximum	t_{rr}	1.0 2.0		μs
Typical junction capacitance at 4.0V, 1MHz	C_J	40		pF

Note: (1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, with leads attached to heat sink

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

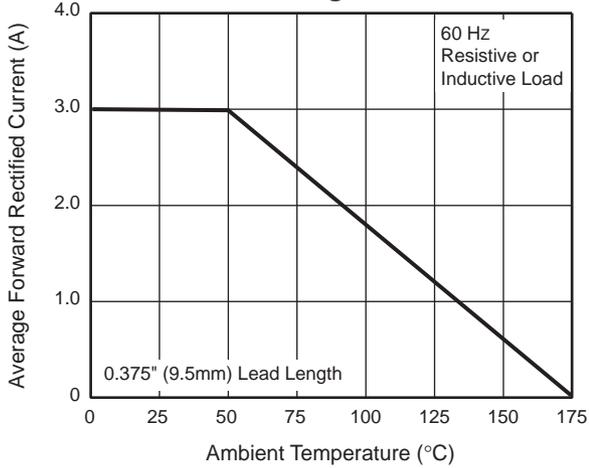


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

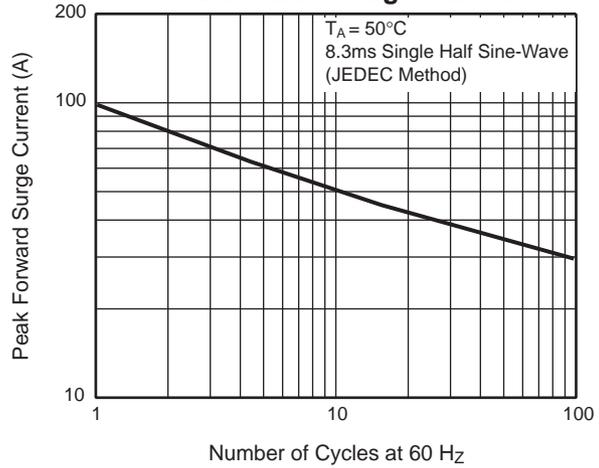


Fig. 3 – Typical Instantaneous Forward Characteristics

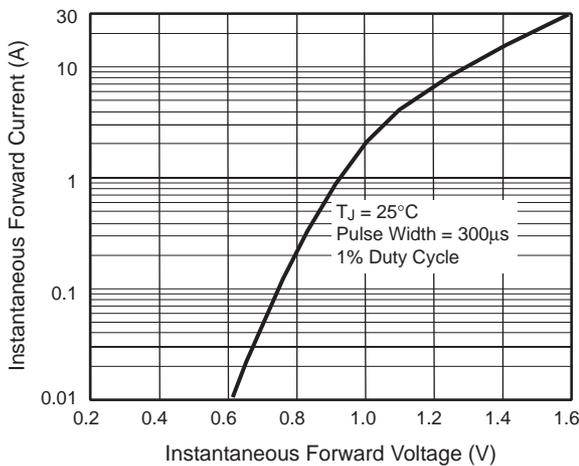


Fig. 4 – Typical Reverse Characteristics


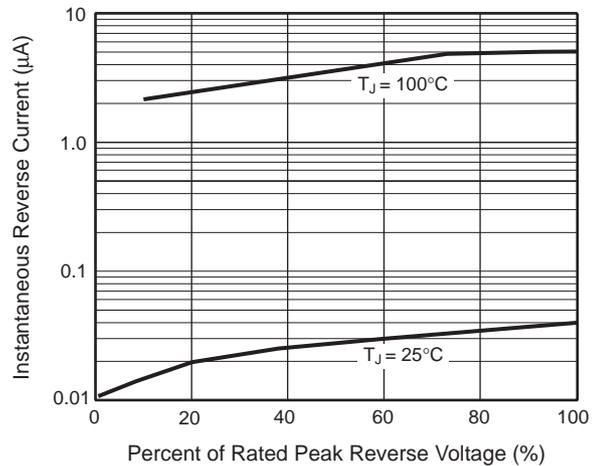


Fig. 5 – Typical Junction Capacitance



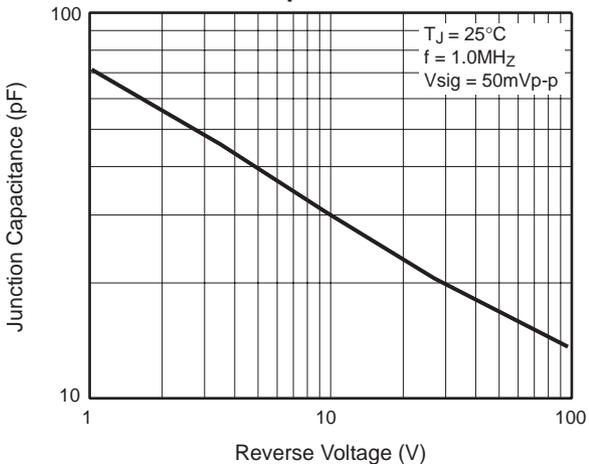

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.