


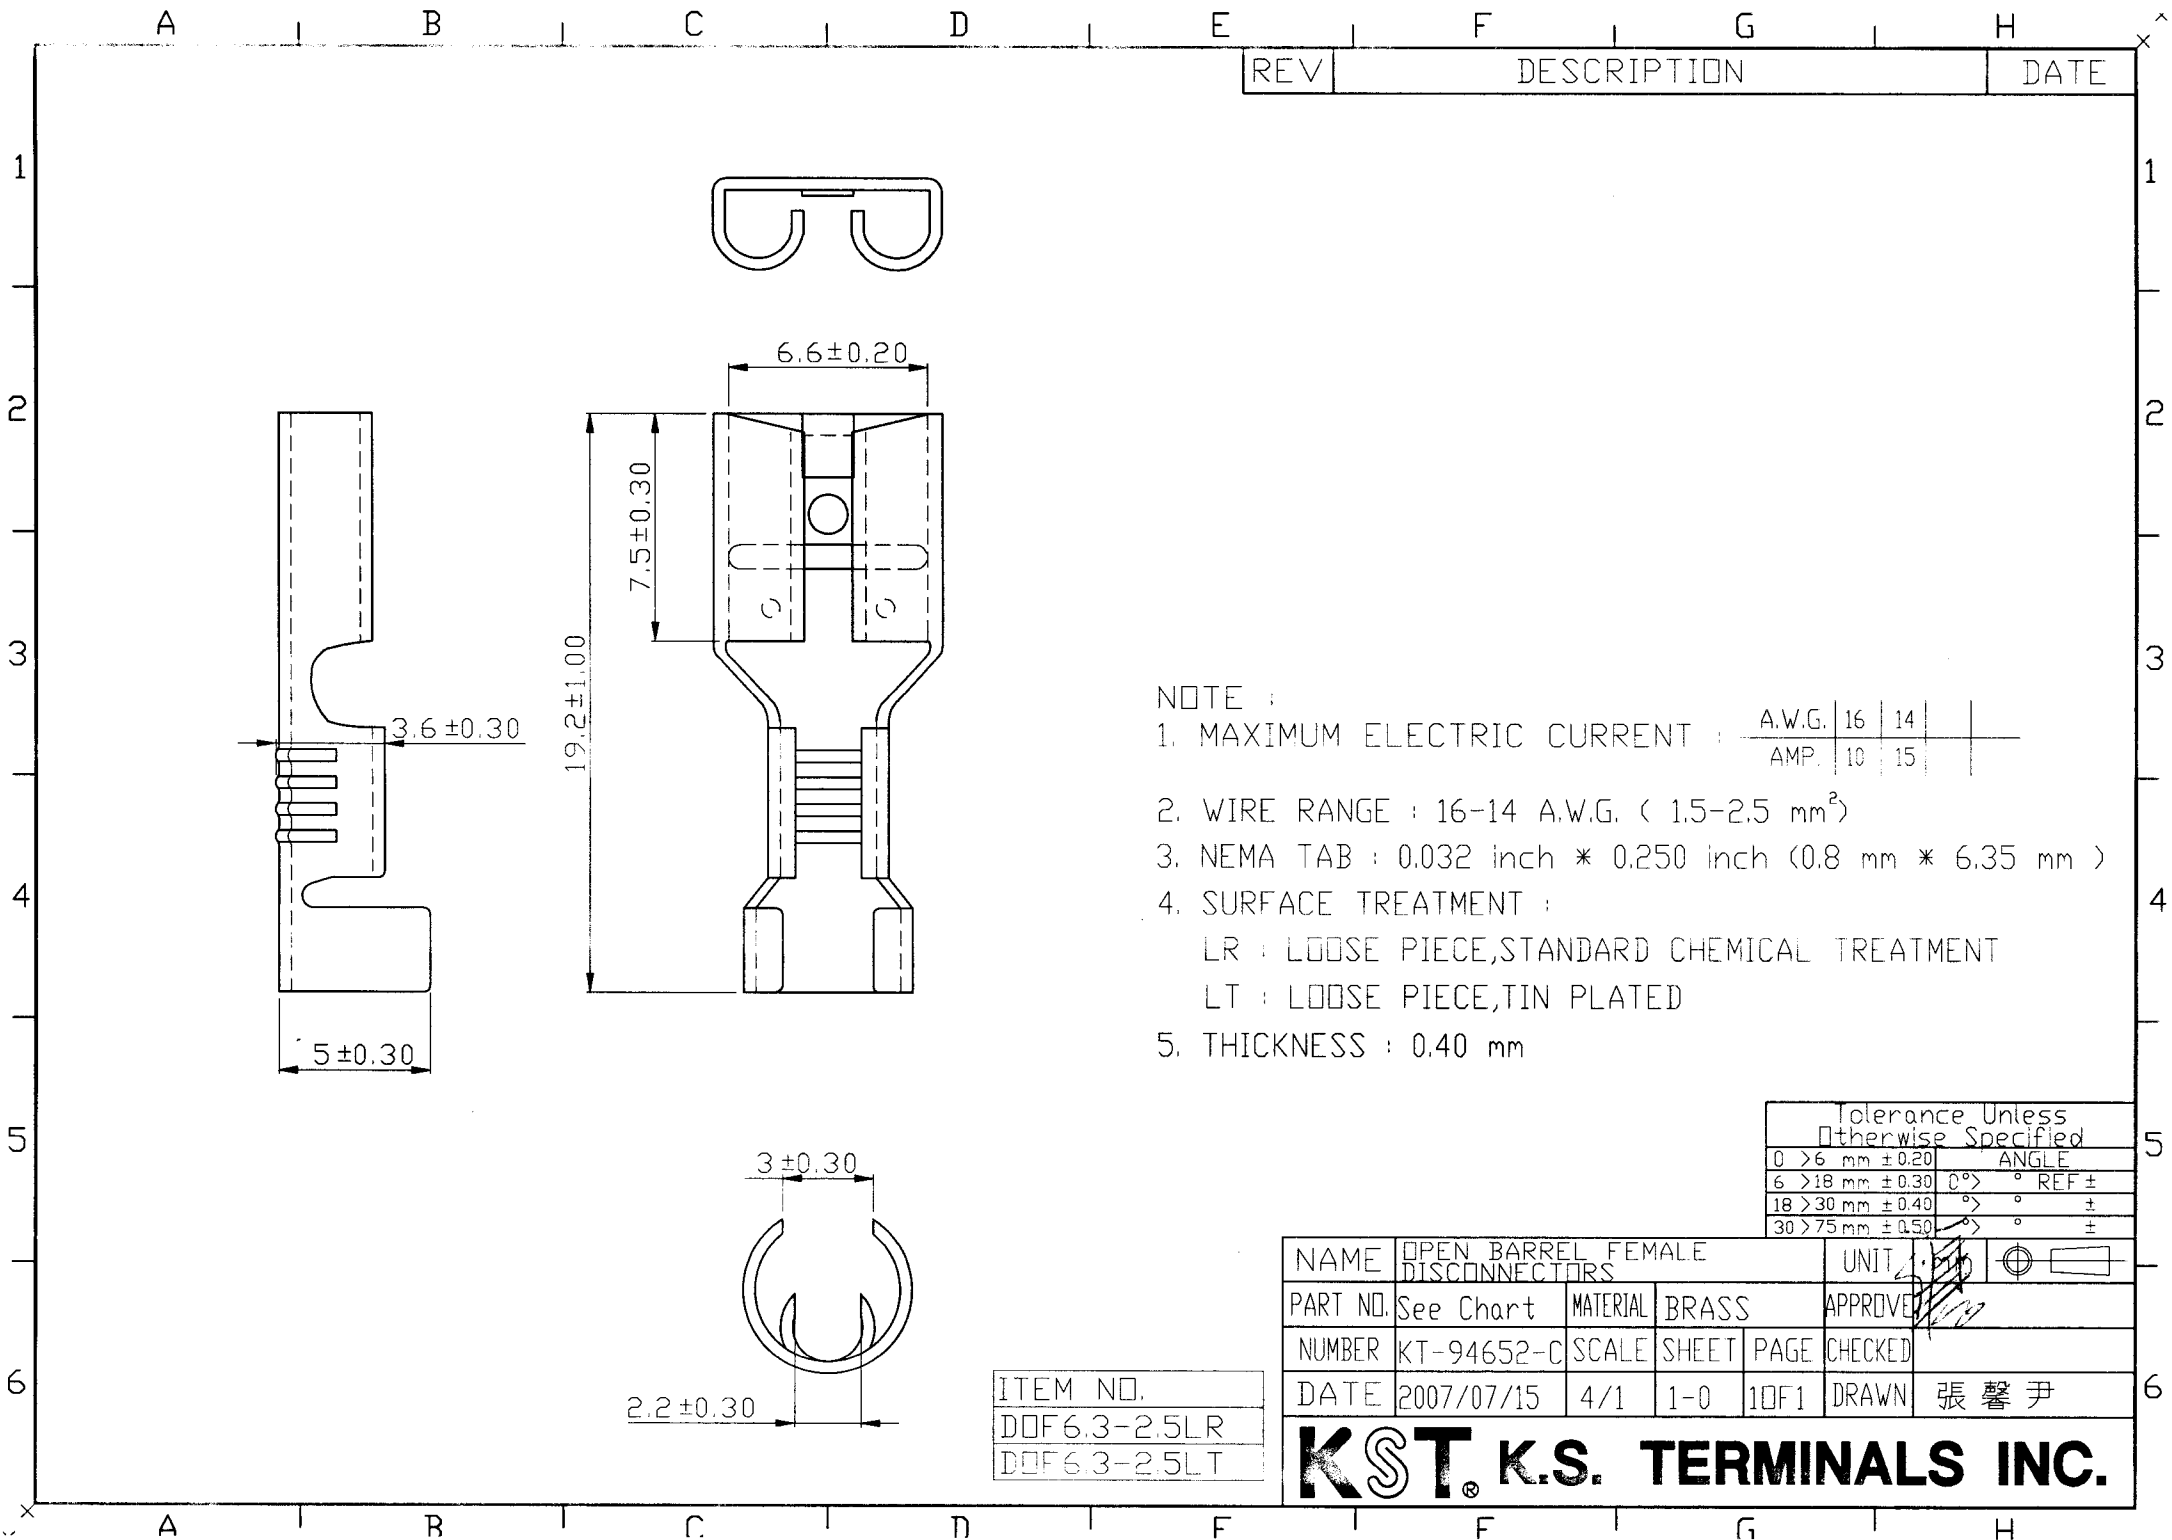

NOTE :

- MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	10	15
- WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
- NEMA TAB : 0.032 inch * 0.250 inch (0.8 mm * 6.35 mm)
- SURFACE TREATMENT :
 - LR : LOOSE PIECE, STANDARD CHEMICAL TREATMENT
 - LT : LOOSE PIECE, TIN PLATED
- THICKNESS : 0.40 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ° REF ±
18 > 30 mm ± 0.40	° ° ±
30 > 75 mm ± 0.50	° ° ±

NAME	OPEN BARREL FEMALE DISCONNECTORS				UNIT	1	2	3	4
PART NO.	See Chart				MATERIAL	BRASS			
NUMBER	KT-94652-C				SCALE	SHEET	PAGE	CHECKED	
DATE	2007/07/15				4/1	1-0	10F1	DRAWN	張馨尹

KST. K.S. TERMINALS INC.