


VINYL-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS



MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : BRASS

DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL

A.W.G.	ITEM NO.	W mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	FDD1-110(5) *	3.2 (.126)	19.0 (.748)	4.0 (.150)	RED
	FDD1-110(8) *				
	FDD1-187(5) *	5.0 (.197)	19.4 (.764)		
	FDD1-187(8) *				
	FDD1-205(5)	5.7 (.224)	19.3 (.760)		
	FDD1-205(8)				
	FDD1-250 *	6.6 (.260)	20.8 (.819)		
	FDD1-312 ☉	8.2 (.323)	24.5 (.965)		
16-14	FDD2-110(5) *	3.2 (.126)	19.0 (.748)	4.7 (.185)	BLUE
	FDD2-110(8) *				
	FDD2-187(5) *	5.0 (.197)	19.4 (.764)		
	FDD2-187(8) *				
	FDD2-205(5)	5.7 (.224)	19.3 (.760)		
	FDD2-205(8)				
	FDD2-250 *	6.6 (.260)	20.8 (.819)		
	FDD2-312 ☉	8.2 (.323)	24.5 (.965)		
	FDD2-375 ☉	10.0 (.323)	26.1 (1.028)		
12-10	FDD5-110(5) ☉	3.2 (.126)	22.0 (.866)	6.2 (.244)	YELLOW
	FDD5-110(8) ☉				
	FDD5-187(5) ☉	5.0 (.197)			
	FDD5-187(8) ☉				
	FDD5-250 *	6.6 (.260)	23.3 (.917)		
	FDD5-312 ☉	8.2 (.323)	27.0 (1.063)		
	FDD5-375 ☉	10.0 (.394)	28.6 (1.126)		




ALL LISTED

☉ : NOT UL AND C-UL LISTED

* : ADDITIONAL  CERTIFIED

VINYL-INSULATED DOUBLE CRIMP
MALE DISCONNECTORS



MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
--------	----	----	----	----	----	----	----

AMP.	3	4	7	10	15	20	24
------	---	---	---	----	----	----	----

MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL: BRASS

DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL


A.W.G.	ITEM NO.	W mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	MDD1-110(5)	2.8(.110)	19.2(.756)	4.0 (.150)	RED
	MDD1-110(8)				
	MDD1-187(5)	4.8(.189)	19.8(.780)		
	MDD1-187(8)				
	MDD1-250 *	6.35(.250)	21.8(.858)		
16-14	MDD2-187(5)	4.8(.189)	19.8(.780)	4.7 (.185)	BLUE
	MDD2-187(8)				
	MDD2-250 *	6.35(.250)	21.8(.858)		
12-10	MDD5-250 *	6.35(.250)	24.0(.945)	6.2 (.244)	YELLOW



ALL LISTED

* : ADDITIONAL  CERTIFIED

VINYL-INSULATED DOUBLE CRIMP
PIGGY BACK DISCONNECTORS

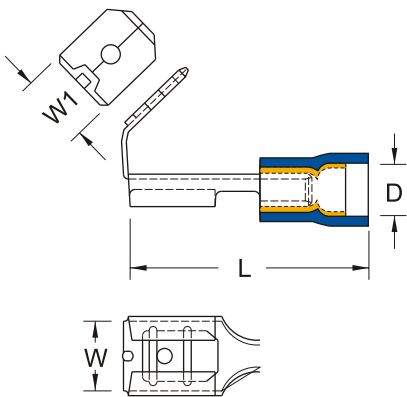

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
--------	----	----	----	----	----	----	----

AMP.	3	4	7	10	15	20	24
------	---	---	---	----	----	----	----

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL: BRASS

DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL

A.W.G.	ITEM NO.	W mm(inch)	W1 mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	PBDD1-250 *	6.6 (.260)	6.35 (.250)	22.5 (.886)	4.0 (.150)	RED
16-14	PBDD2-250 *	6.6 (.260)	6.35 (.250)	22.5 (.886)	4.7 (.185)	BLUE
12-10	PBDD5-250 *	6.6 (.260)	6.35 (.250)	24.0 (.945)	6.2 (.244)	YELLOW



ALL LISTED

* : ADDITIONAL  CERTIFIED