


**VINYL-FULLY INSULATED
FEMALE DISCONNECTORS**

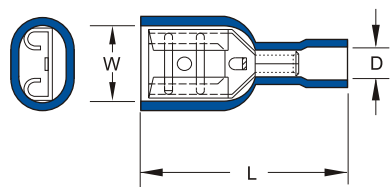

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.

INSULATION MATERIAL : VINYL


TERMINAL MATERIAL : BRASS

A.W.G.	ITEM NO.	W mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	FDFV1-187(5)	5.0 (.197)	19.5 (.768)	4.0 (.157)	RED
	FDFV1-187(8)				
	FDFV1-250	6.6 (.260)	22.0 (.866)		
16-14	FDFV2-187(5)	5.0 (.197)	19.3 (.760)	4.5 (.177)	BLUE
	FDFV2-187(8)				
	FDFV2-250	6.6 (.260)	22.0 (.866)		
12-10	FDFV5-250	6.6 (.260)	24.3 (.957)	5.5 (.217)	YELLOW

  ALL LISTED

INSULATED QUICK DISCONNECTORS

**C3 VINYL-FULLY INSULATED
RECEPTACLE DISCONNECTORS**

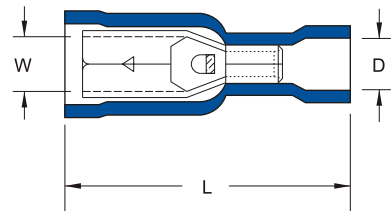

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : BRASS

A.W.G.	ITEM NO.	W mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	FRV1-156	3.9 (.154)	23.0 (.906)	4.0 (.157)	RED
16-14	FRV2-156	3.9 (.154)	23.5 (.925)	4.5 (.177)	BLUE
	FRV2-195	4.9 (.193)	24.5 (.965)		
12-10	FRV5-195	4.9 (.193)	24.0 (.945)	5.5 (.217)	YELLOW

  ALL LISTED