


VINYL-INSULATED
FEMALE DISCONNECTORS

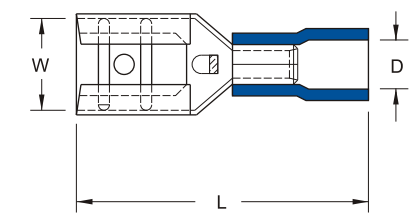

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.

INSULATION MATERIAL : VINYL


TERMINAL MATERIAL: BRASS

A.W.G.	ITEM NO.	W mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	FDV1-110(5)	3.2 (.126)	18.6 (.732)	4.0 (.157)	RED
	FDV1-110(8)				
	FDV1-187(5)	5.0 (.197)	19.0 (.748)		
	FDV1-187(8)				
	FDV1-205(5)	5.7 (.224)	18.5 (.728)		
	FDV1-205(8)				
	FDV1-250	6.6 (.260)	20.5 (.807)		
	FDV1-312 ☉	8.2 (.323)	24.2 (.953)		
16-14	FDV2-110(5)	3.2 (.126)	18.6 (.732)	4.5 (.177)	BLUE
	FDV2-110(8)				
	FDV2-187(5)	5.0 (.197)	19.0 (.748)		
	FDV2-187(8)				
	FDV2-205(5)	5.7 (.224)	18.5 (.728)		
	FDV2-205(8)				
	FDV2-250	6.6 (.260)	20.5 (.807)		
	FDV2-312 ☉	8.2 (.323)	24.2 (.953)		
	FDV2-375 ☉	10.0 (.394)	25.5 (1.004)		
12-10	FDV5-110(5) ☉	3.2 (.126)	22.0 (.866)	5.5 (.512)	YELLOW
	FDV5-110(8) ☉				
	FDV5-187(5) ☉	5.0 (.197)			
	FDV5-187(8) ☉				
	FDV5-250	6.6 (.260)	23.5 (.925)		
	FDV5-375 ☉	10.0 (.394)	28.5 (1.122)		



ALL LISTED
☉ : NOT UL AND C-UL LISTED

VINYL-INSULATED
MALE DISCONNECTORS

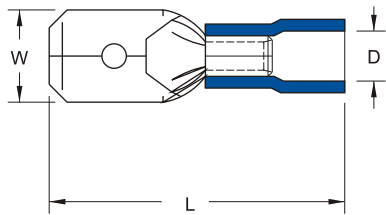

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.


INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : BRASS

A.W.G.	ITEM NO.	W mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	MDV1-110(5)	2.8 (.110)	18.5 (.728)	4.0 (.157)	RED
	MDV1-110(8)				
	MDV1-187(5)	4.8 (.189)	19.0 (.748)		
	MDV1-187(8)				
	MDV1-250	6.35 (.250)	21.0 (.827)		
16-14	MDV2-187(5)	4.8 (.189)	19.0 (.748)	4.5 (.177)	BLUE
	MDV2-187(8)				
	MDV2-250	6.35 (.250)	21.0 (.827)		
12-10	MDV5-250	6.35 (.250)	24.0 (.945)	5.5 (.217)	YELLOW

INSULATED QUICK DISCONNECTORS

C3 VINYL-INSULATED
PIGGY BACK DISCONNECTORS

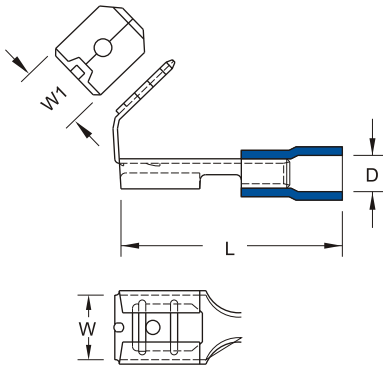

MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16	14	12	10
AMP.	3	4	7	10	15	20	24

MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : BRASS

A.W.G.	ITEM NO.	W mm(inch)	W1 mm(inch)	L mm(inch)	D mm(inch)	COLOR
22-16	PBDV1-250	6.6 (.260)	6.35 (.250)	22.0 (.866)	4.0 (.157)	RED
16-14	PBDV2-250	6.6 (.260)	6.35 (.250)	22.0 (.866)	4.5 (.177)	BLUE
12-10	PBDV5-250	6.6 (.260)	6.35 (.250)	24.0 (.945)	5.5 (.217)	YELLOW

UL cUL ALL LISTED