
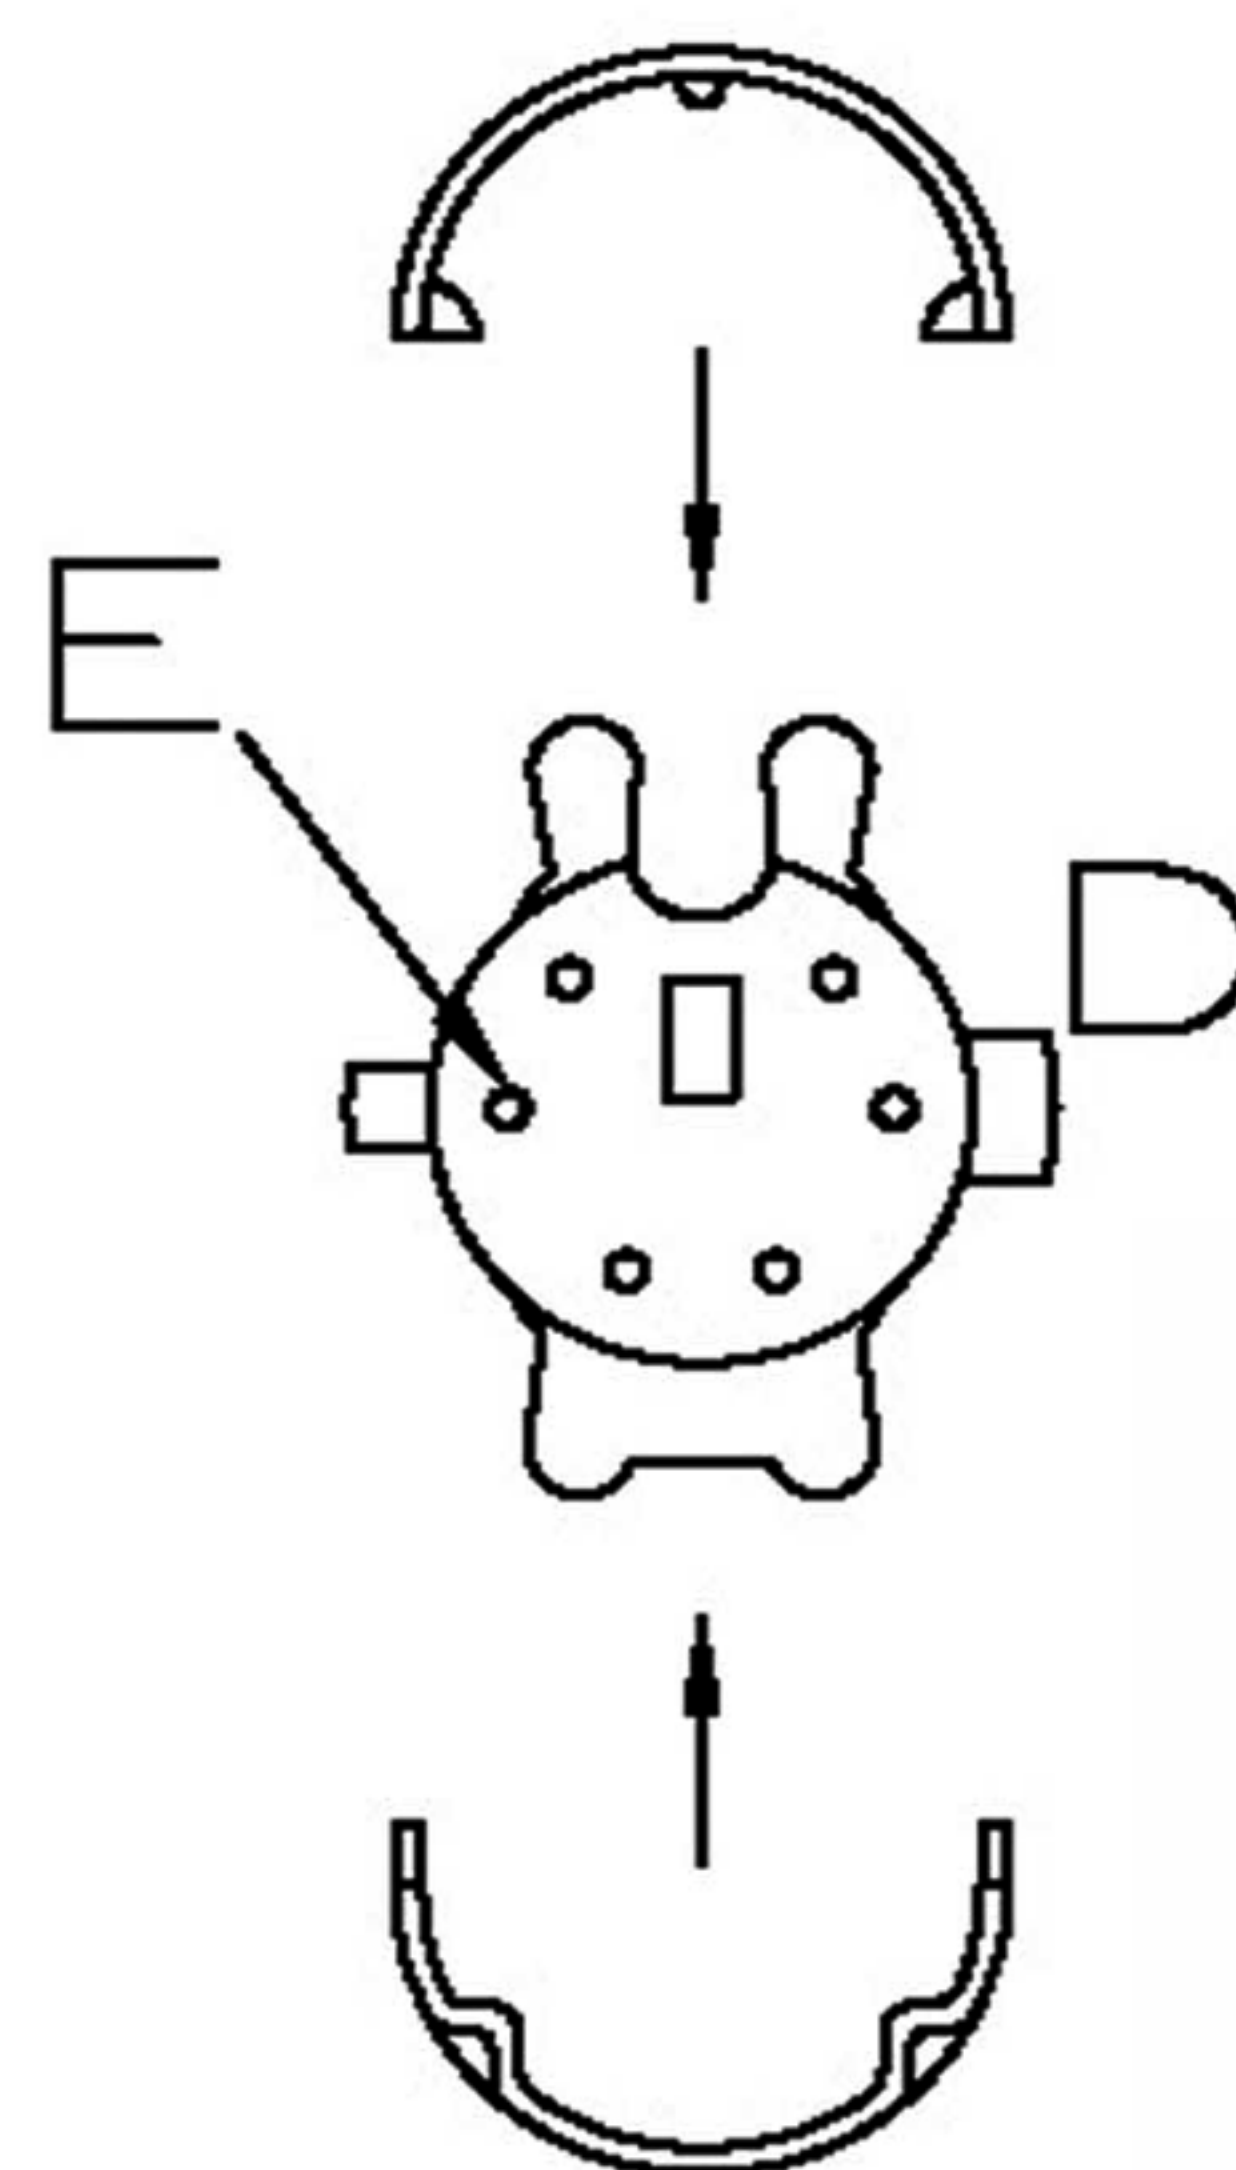
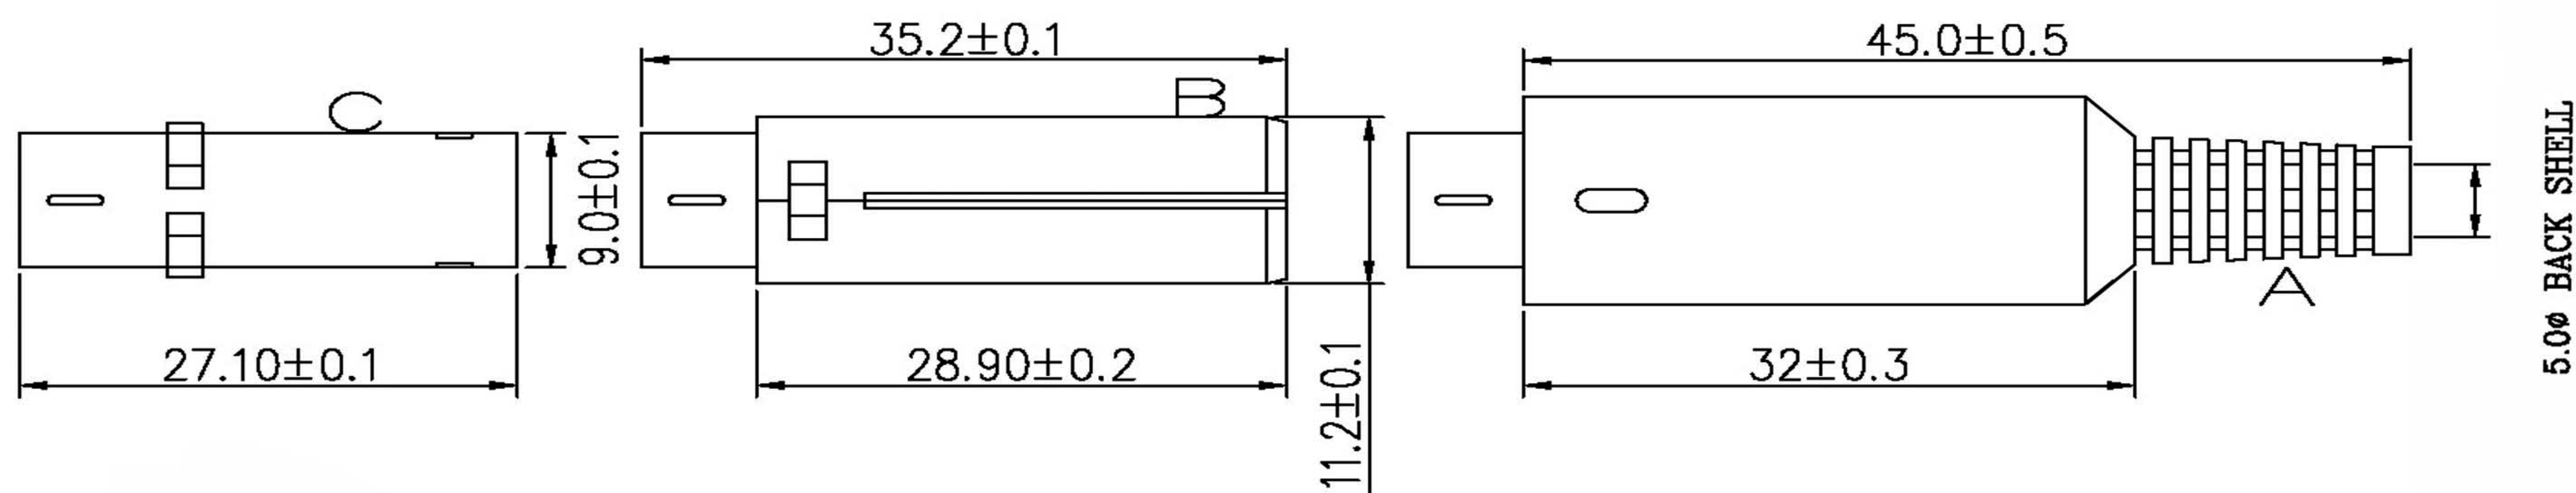


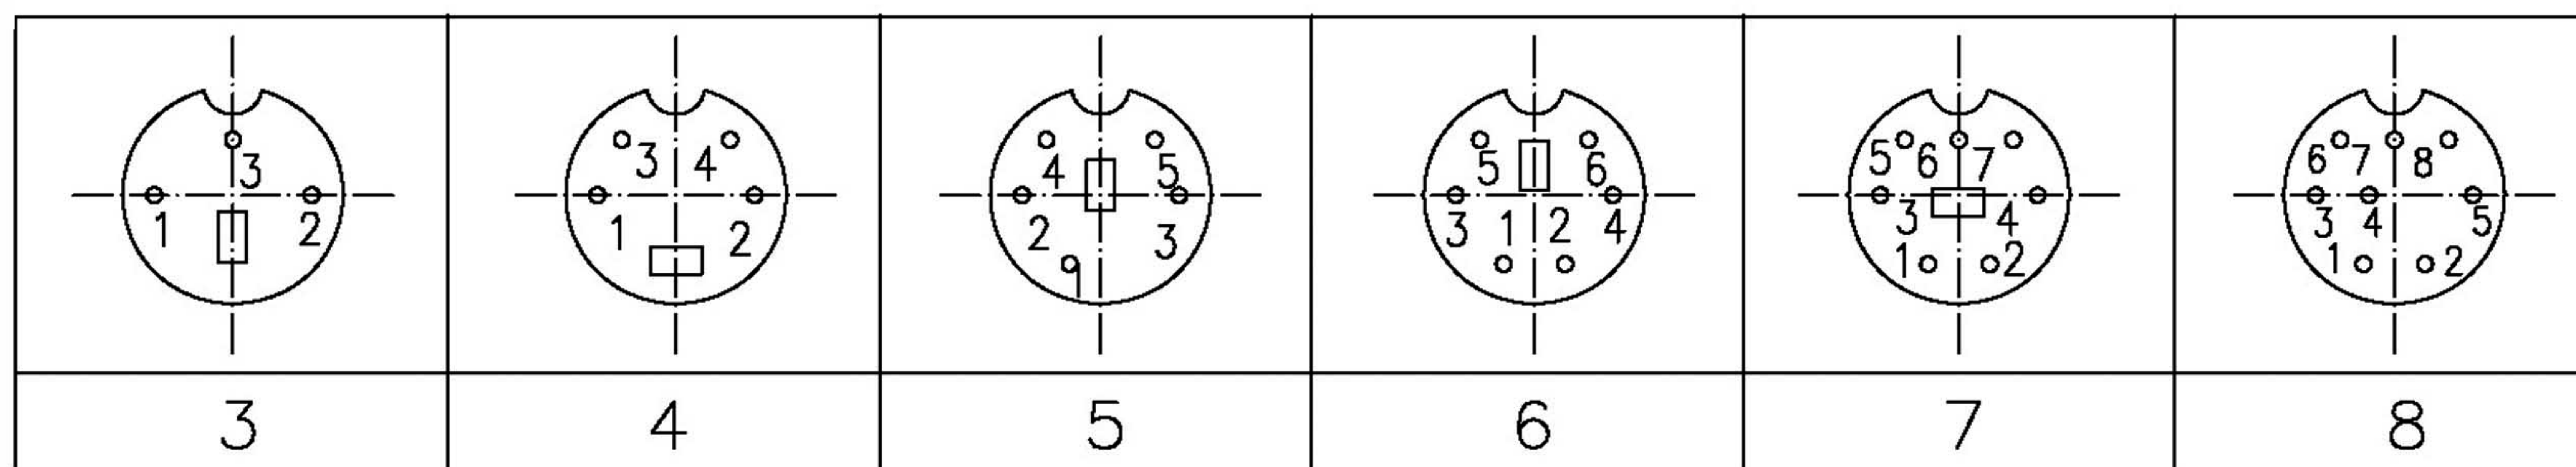

SPECIFICATIONS:

- 1.RATING:11V AC 1A MAX
OR 12V DC 2A MAX.**
- 2.INSULATION RESISTANCE:
50M OHM MIN AT 500V DC.**
- 3. DIELECTRIC STRENGTH:
500V AC / 1 MINUTE.**

MATERIAL:

- A.COVER: PE+2L**
- B.SHELL: ABS**
- C.METAL SHIELD:
BRASS NICKEL PLATED**
- D.HOUSING: NYLON66+GF**
- E.CONTACT:
BRASS SILVER PLATED**

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 Jolin

DATE 制表日
2007/03/16

SCALE
比例 參考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差
.0 ±
.00 ±
ANG. ±

SIZE.
紙張尺寸 A4

REV.
版次 A

PART NAME 品名

MINI DIN MALE SERIE

PART NO.

料號

MDx - 03