

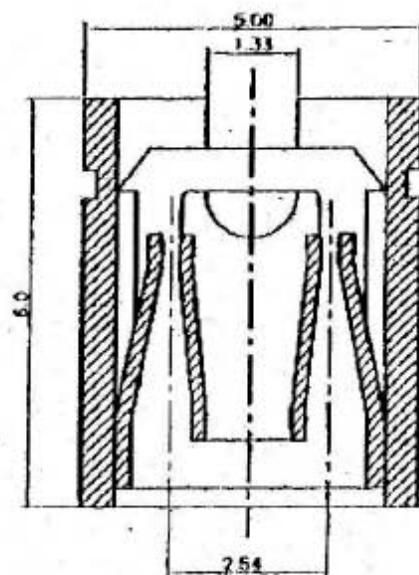


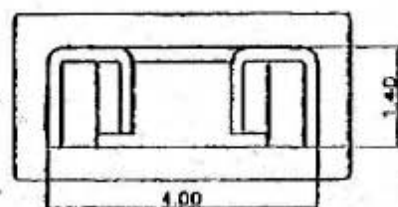

SEC A-A

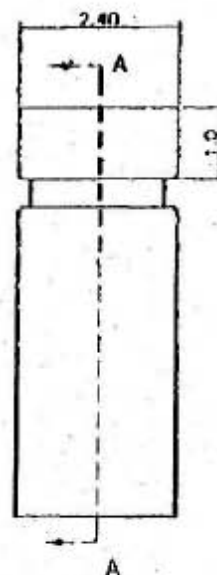

NOTES

1. MATERIAL

- 1.1 Insulator: PBT 30% Glass Fiber UL-94V-0
- 1.2 Contact: Brass or Phosphor Bronze
- 1.3 Contact Plating: Gold Plated Over Nickel

2. SPECIFICATION

- 2.1 Current Rating: 3Amp
- 2.2 Dielectric Strength: 500V AC
- 2.3 Insulator Resistance: 1000M ohms Min
- 2.4 Contact Resistance: 20 M ohms Min
- 2.5 Operation Temperature: -55 °C to +85 °C
- 2.6 Maximum Insertion Force: 200~80g
- 2.7 Minimum Withdrawal Force: 130~80g

T&T

Connection System Co., Ltd.

製表日: 2000/05/14

DWG.

JEFFREY

APPROVED

UNIT

MM

APPD.

CKD.

SCALE

2 : 1

TOLERANCE

± 0.5

PART NAME

2.54MM MINI JUMPER 2WAYS
BLACK OPEN TYPE H:6.0MM

PART NO.

REV.

A