
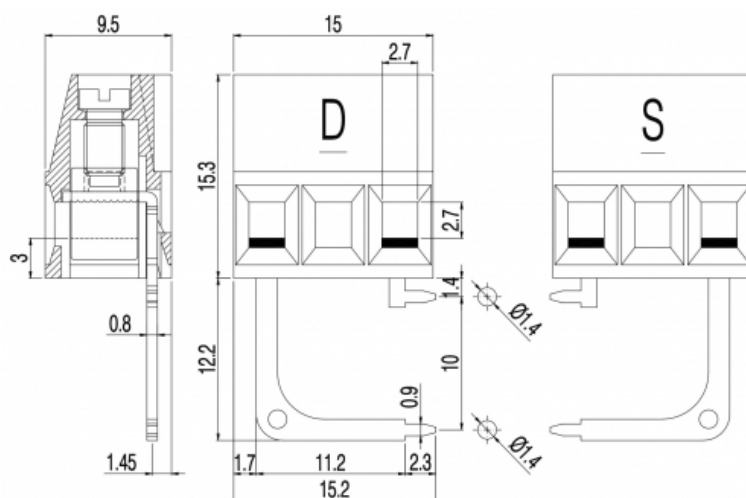


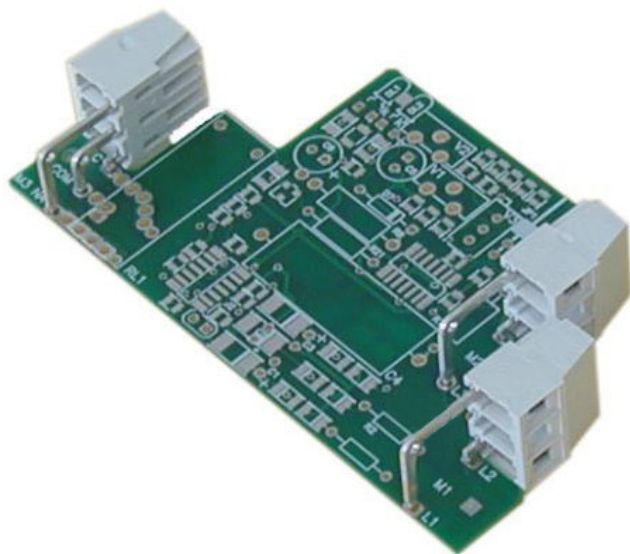

Single-deck terminal block - Left side - Pitch 10mm - 2 poles

GENERAL INFORMATION

pitch:	10 mm
housing height:	15,30 mm
housing depth:	9.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.7 × 2.7 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw: M3
max. torque: 0.5 Nm / 4.5 in.lbs

APPROVALS DATA



	EN 60998-1	-	UL 1059
current:	16A	-	15A factory / 15A field
voltage:	750V	-	300V
wire section:	2.5mm ²	-	14÷30AWG
torque:	0.4Nm	-	4.5Lb-in
FILE:	CA02.01614	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Nickel copper alloy
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours: upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	ML252-10-S-LC	N/A	N/A	N/A