
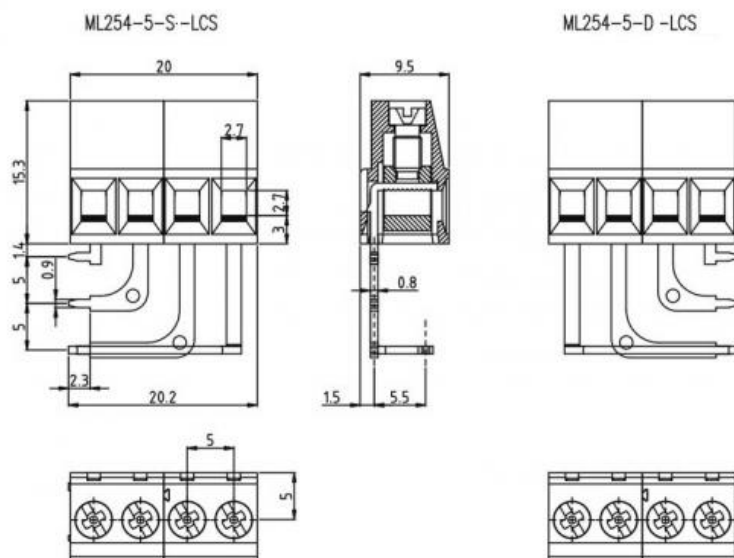


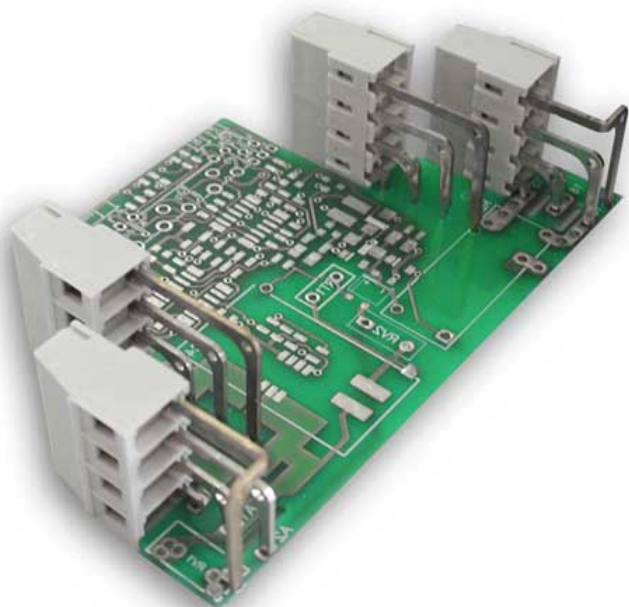

Single-deck terminal block - Left side for CEM22-V - Pitch 5mm - 4 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	15,30 mm
housing depth:	9.5 mm
dimensional class:	medium
wire section:	2.5 mm ² / 14 AWG
clamp opening size:	2.7 × 2.7 mm
wire stripping:	max 7 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw: M3
max. torque: 0.5 Nm / 4.5 in.lbs

APPROVALS DATA

			
	EN 60998-1	-	UL 1059
current:	16A	-	15A factory / 15A field
voltage:	250V	-	300V
wire section:	2,5mm ²	-	14÷30AWG
torque:	0,5Nm	-	4,5Lb-in
FILE:	CA02.01614	-	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel

AVAILABLE COLOURS



clamp/spring: Nickeled copper alloy other colours: upon request
terminal: Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
4	ML254-5-S-LCS	N/A	N/A	N/A