
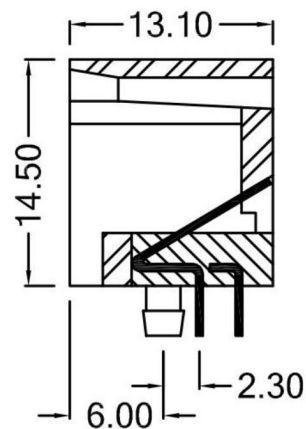
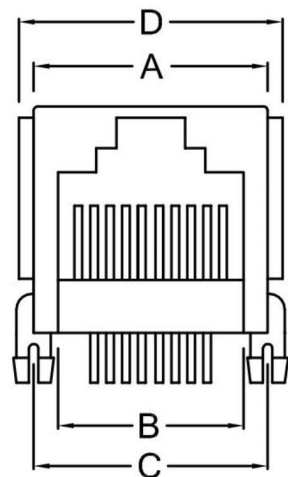


position	contact	A	B	C	D
4P	4C	10.00	7.85	10.00	12.00
(6P)4P	4C	12.20	7.85	12.00	14.20
6P	2C/4C/6C	12.20	9.90	12.00	14.20
8P	8C	15.00	11.85	15.00	16.90
10P	10C	15.00	11.85	15.00	16.90

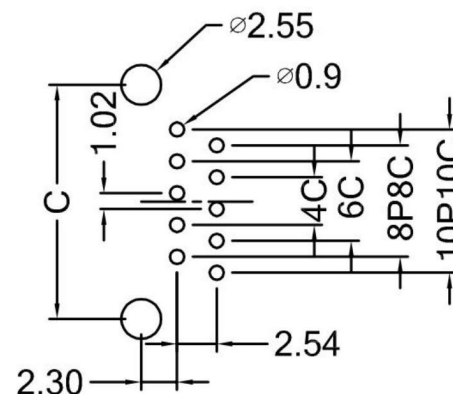

PCB LAYOUT / TOP VIEW

ELECTRICAL

Voltage Rating : 125 V
 Current Rating : 1.5 A
 Contact Resistance : 30 milliohms max.
 Insulation Resistance : 500 megaohms min.
 Dielectric Withstanding Voltage : 1000 V

MATERIAL & FINISH

Housing : PBT. UL94V-0, grey or black
 Insert: PBT. UL94V-0, 6P&4P-black, 8P&10P-gray
 Conductor:
 Round pin: 0.45 mm diameter phosphor bronze,
 Plating: Gold plated over nickel.

Temperature: -40°C to 70°C

RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 BETTY

DWG.
製圖 BETTY

DATE 制表日


2011/10/18



SCALE
比例 參考

UNIT
單位 M M

PAGE
張數 1 OF 1



GENERAL TOLERANCE
X ± X ±
Y ± Y ±
XX ± XX ± 0.15
XXX ± XXX ±

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

SIDE ENTRY MINI P.C.B. JACK
4/6/8/10P WITH PANEL STOP

PART NO.

料號 MODxxM-1-SE