
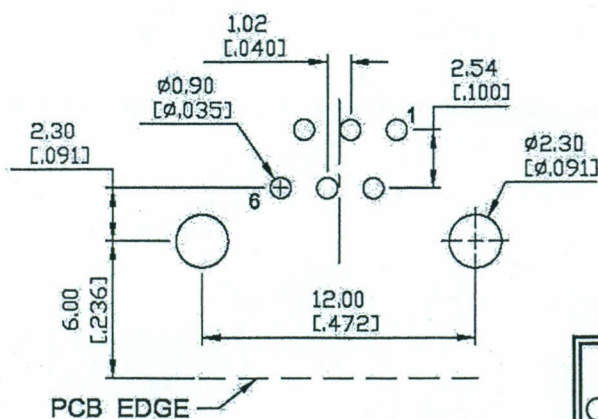
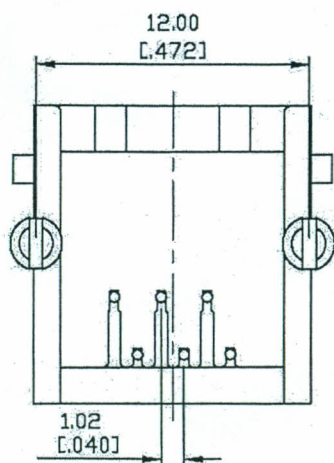
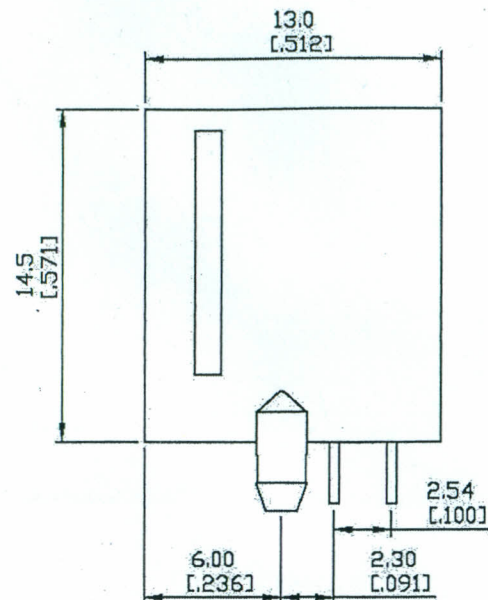


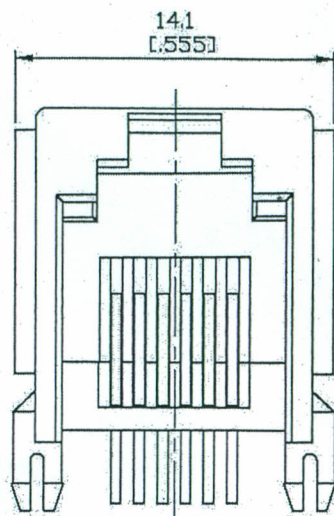

SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 30mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0

Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel


RoHS
Compliant

T&T Connection System Co., Ltd.

APPD.
核准 Angel

DWG.
製圖 Yumi

DATE 制表日
2009/03/18



SCALE
比例 参考

UNIT
單位 MM

PAGE
張數 1 OF 1

TOLERANCE
容許公差
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

SIZE
紙張尺寸 A 4

REV.
版次 A

PART NAME 品名

6/6 S.E. PCB JACK WITH PANEL STOP

PART NO.

料號

MOD66M-1-SE