

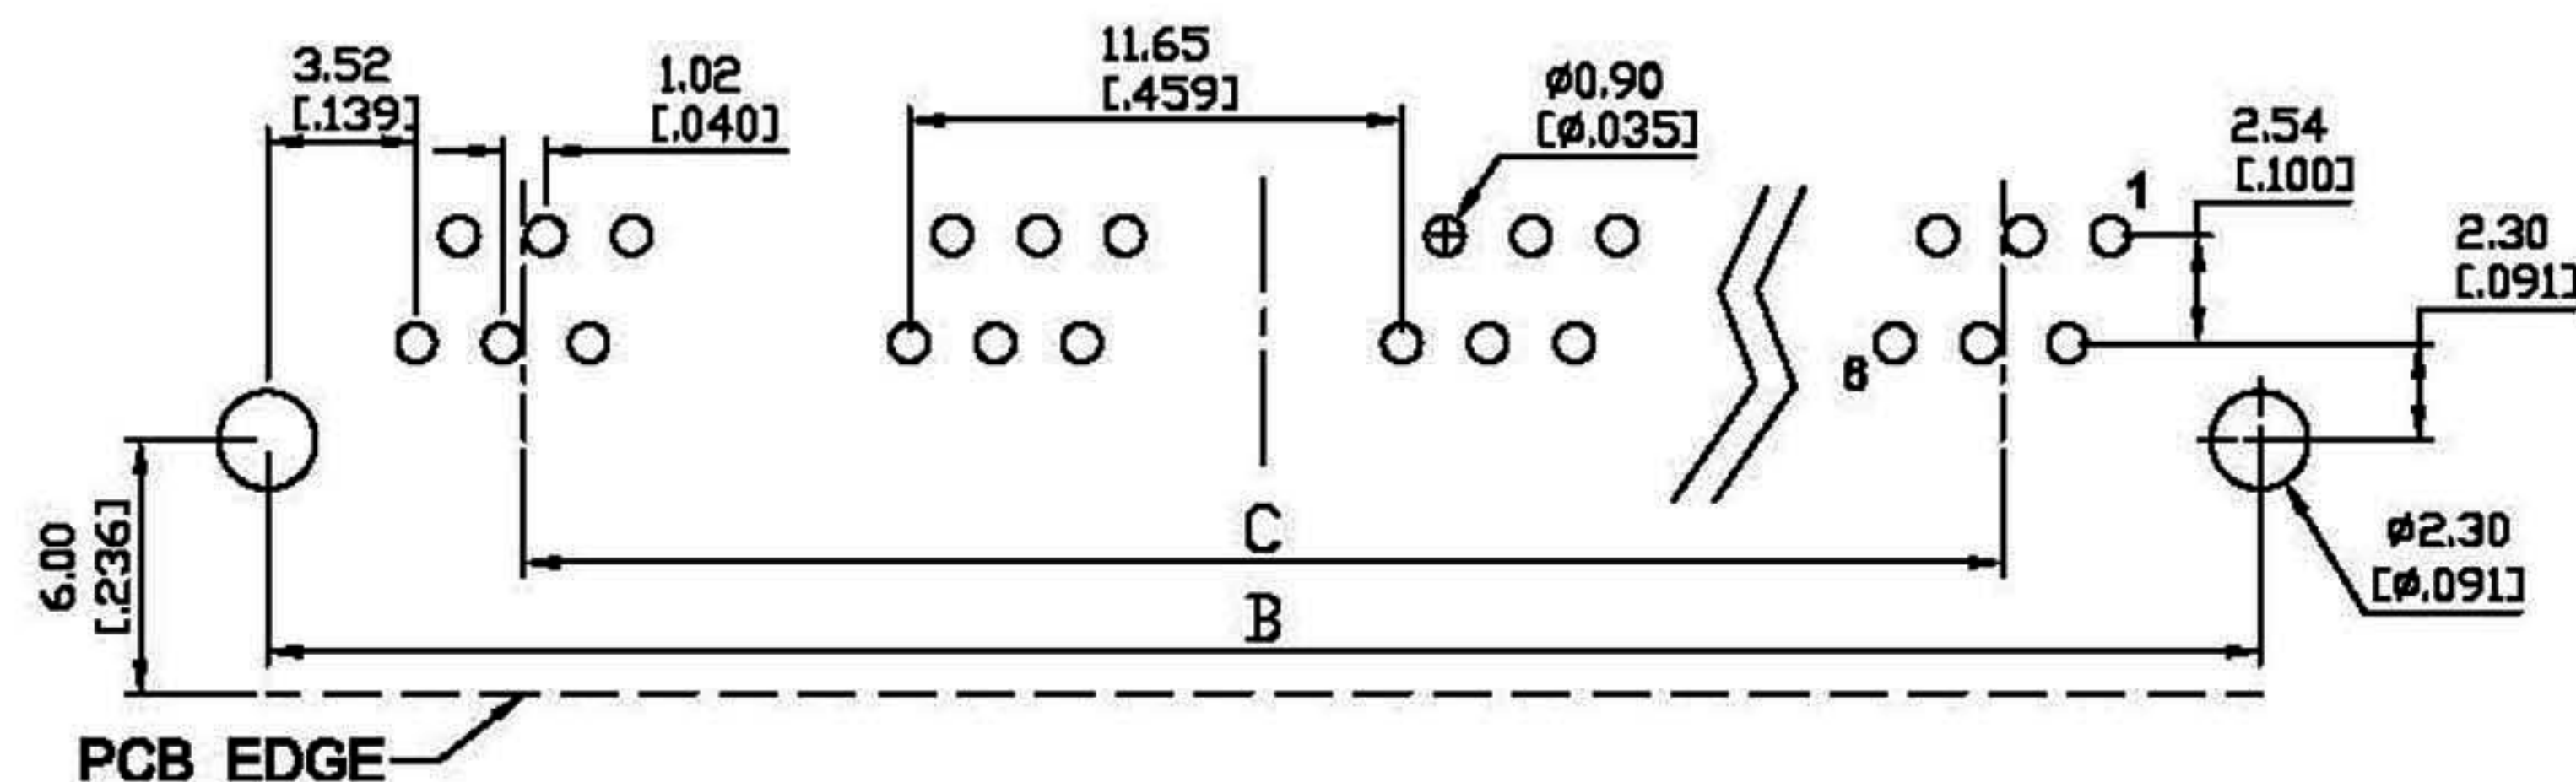
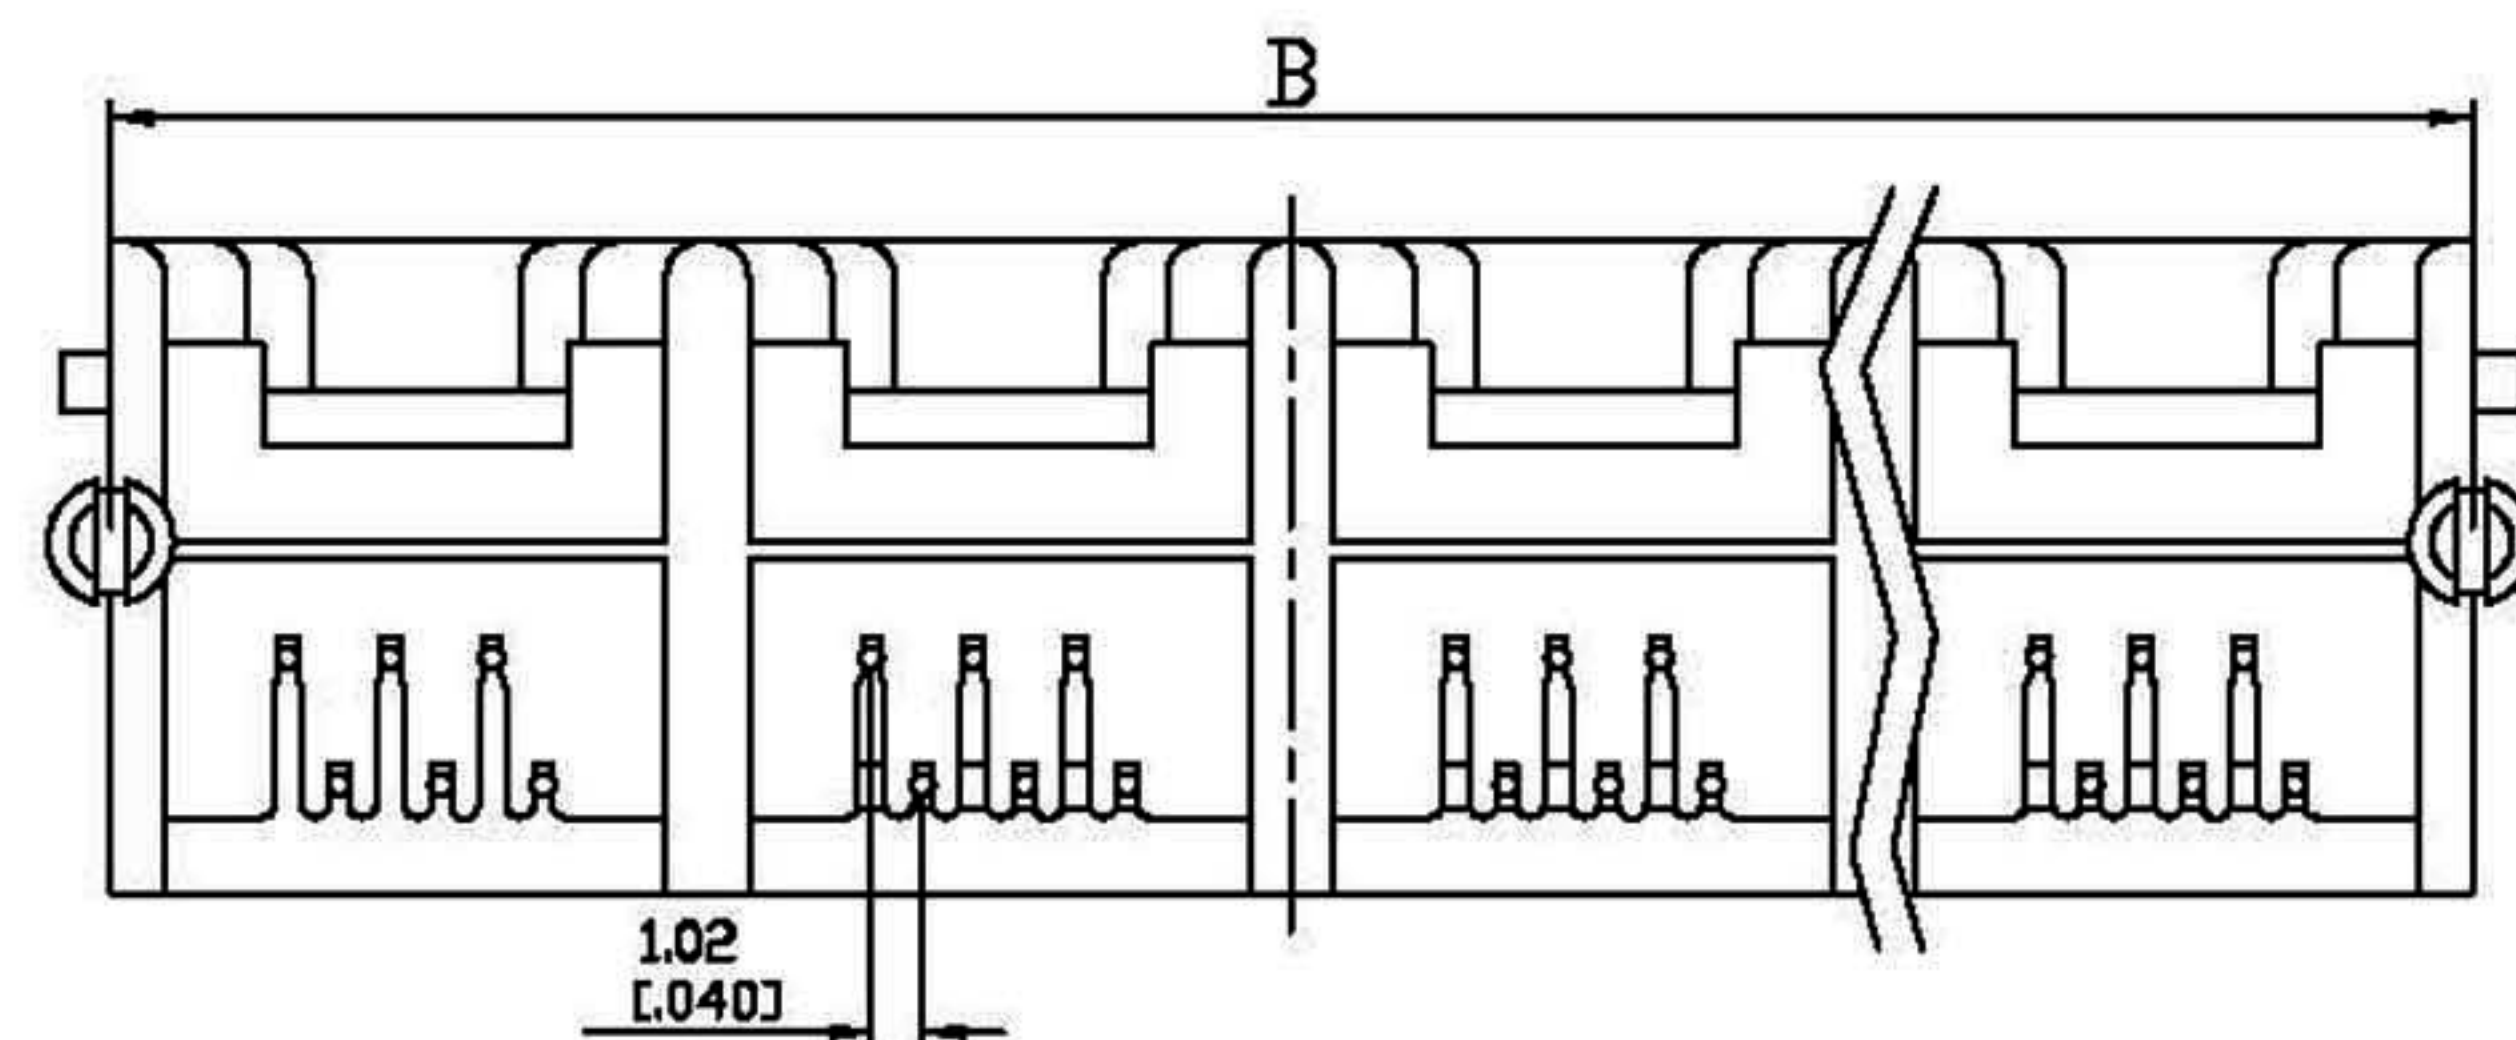


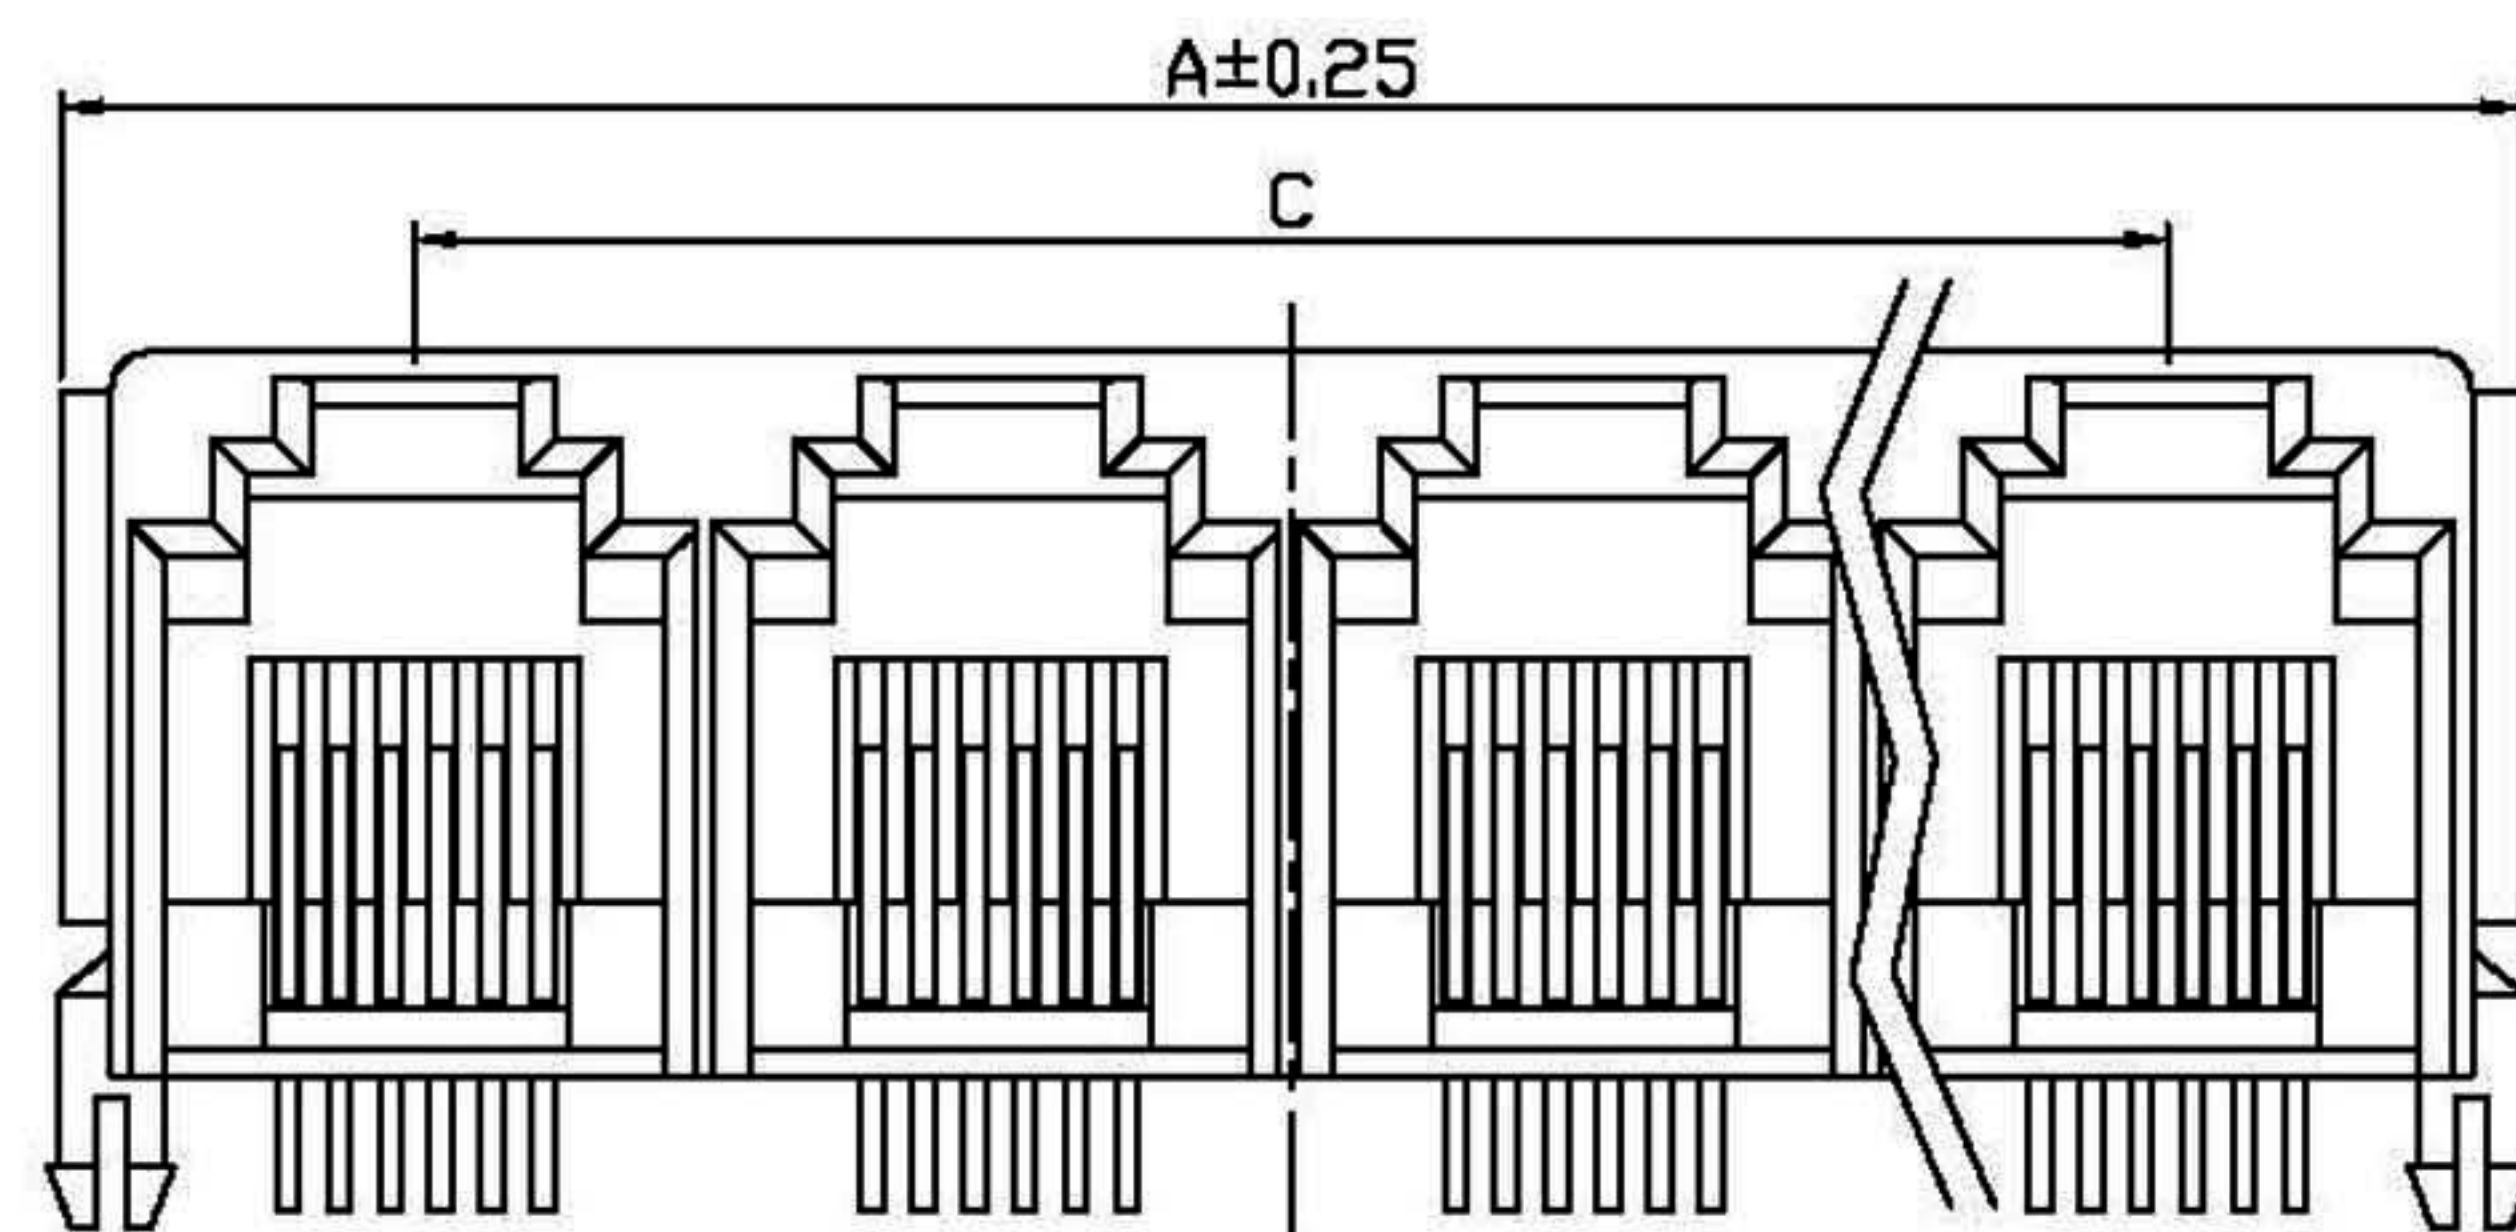

SUGGESTED PCB LAYOUT  
TOP VIEW

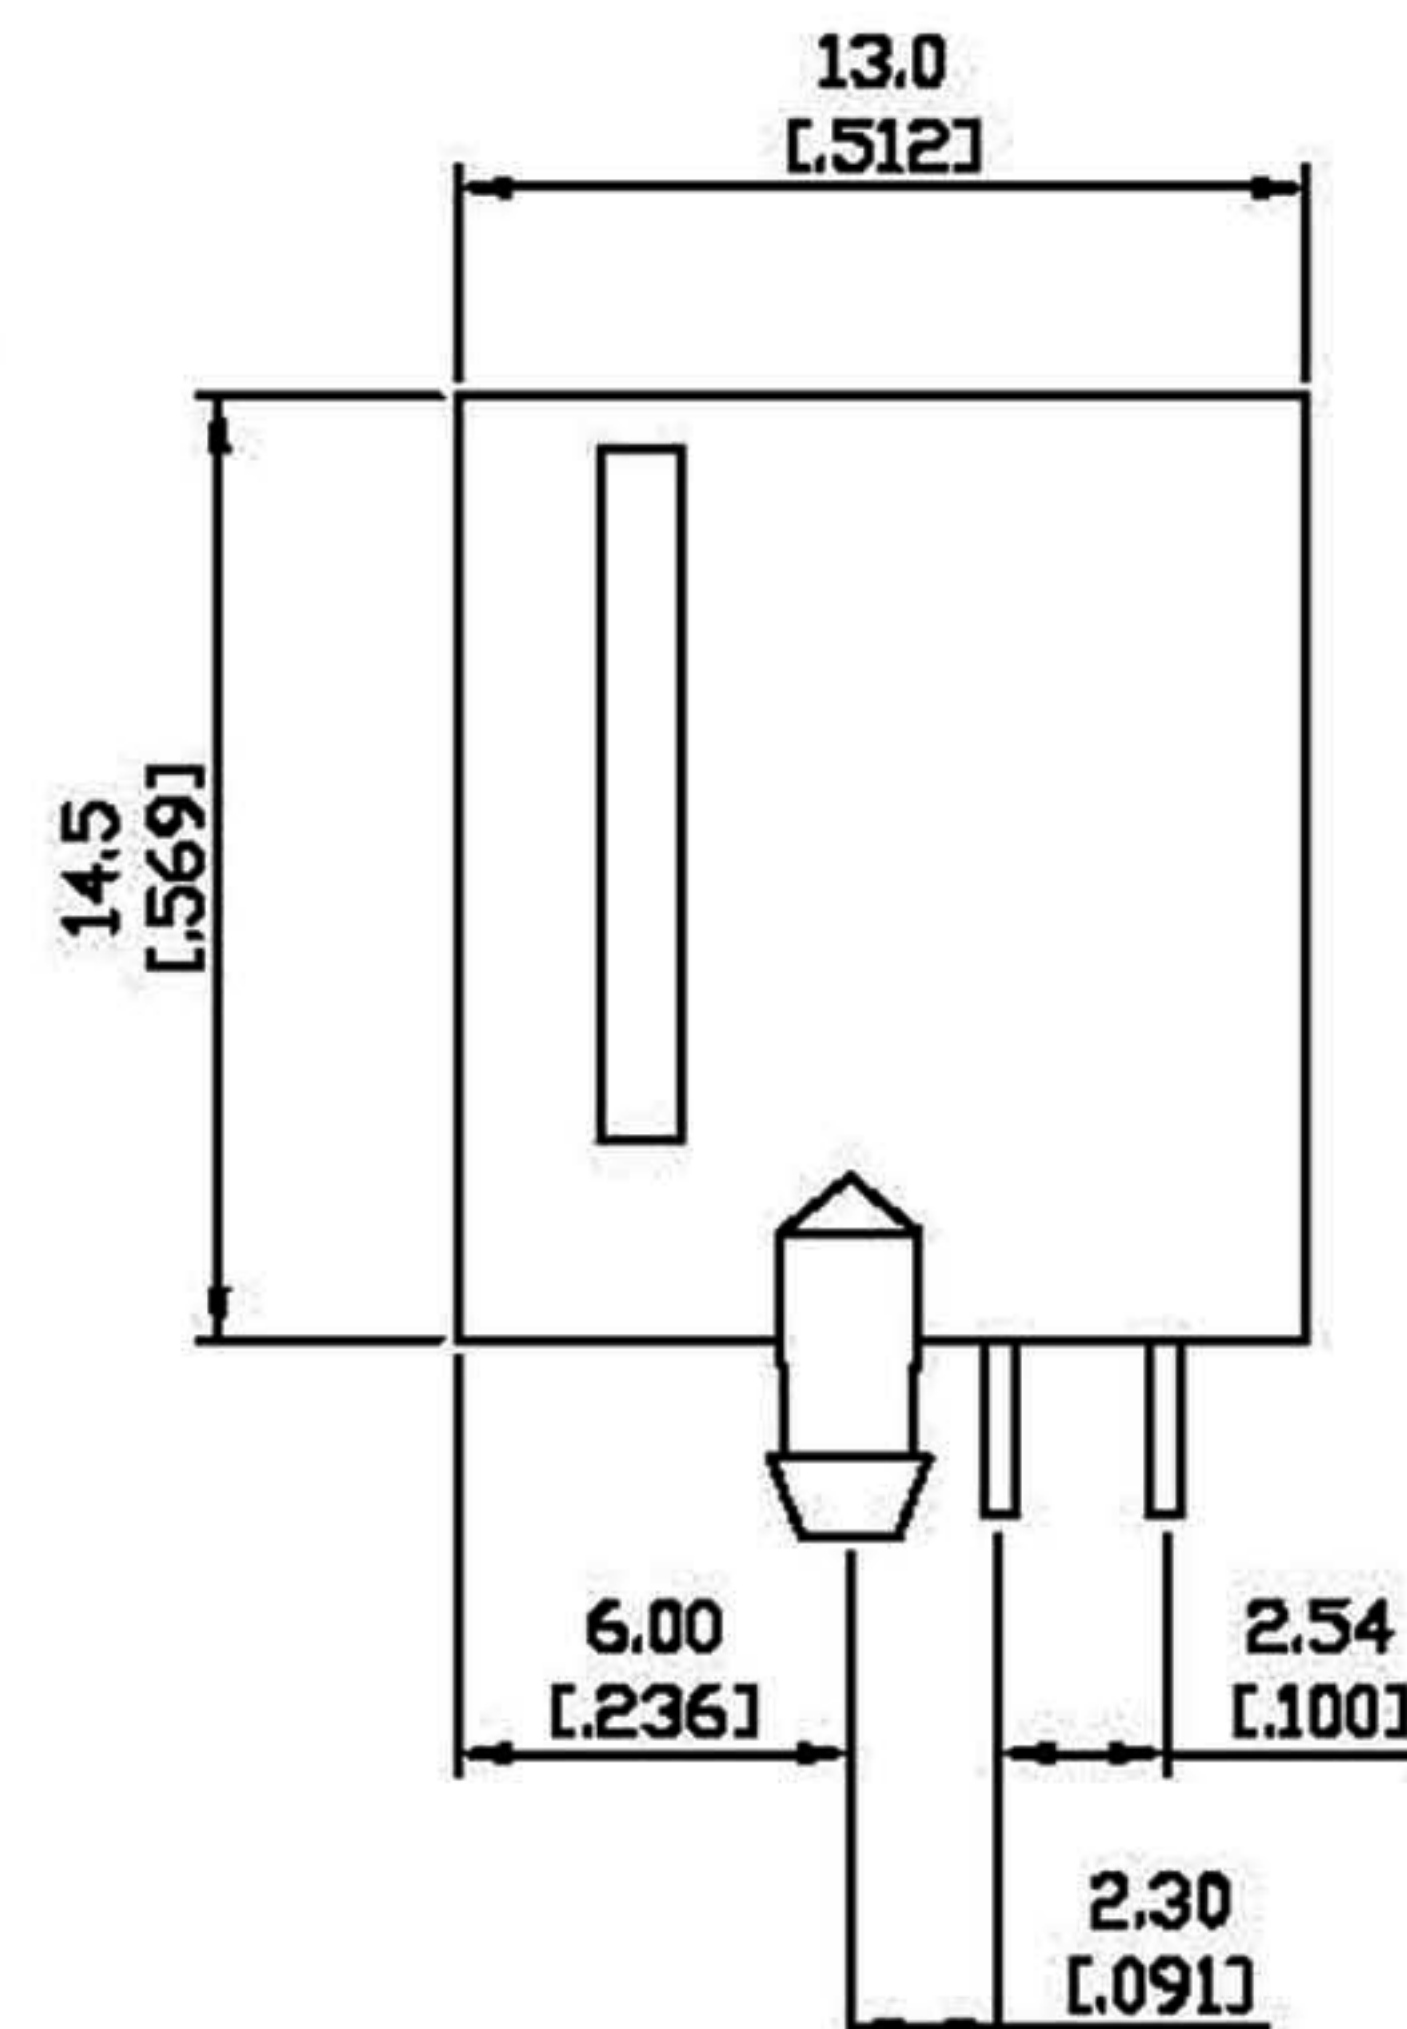

#### Electrical Characteristics :

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 30mΩ Max.
- Withstand Voltage : 1000 VAC 1 minute.
- Current Rating : 1.5A

#### Material:

Housing : Thermoplastic UL94V-0

Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze  
Optional Gold Plating Over Nickel

| Dimensions | No. Of Ports |
|------------|--------------|
|            | 6            |
| A          | 72.40        |
| B          | 70.40        |
| C          | 58.25        |


RoHS  
Compliant

**T&T** Connection System Co., Ltd.

APPD.  
核准 Angel

DWG.  
製圖 Yumi

DATE 制表日  
2007/12/28

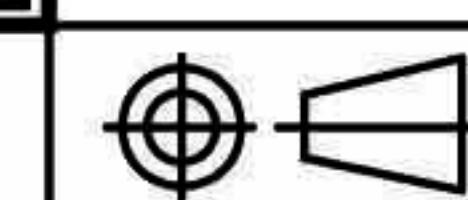

SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

TOLERANCE  
容許公差

.0 ±0.25  
.00 ±0.15  
ANG. ±

SIZE.  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名

6/6 MODULAR JACK  
GANGED BLACK

PART NO.

料號 MOD66M-5-SE