
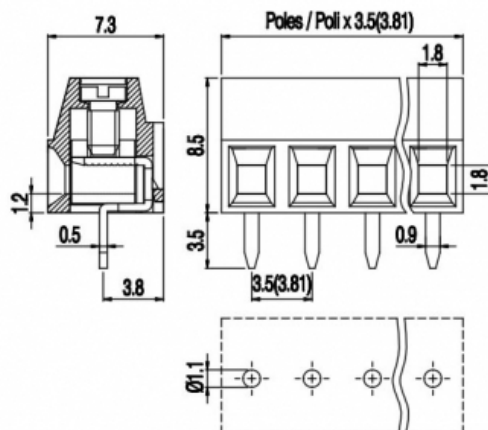


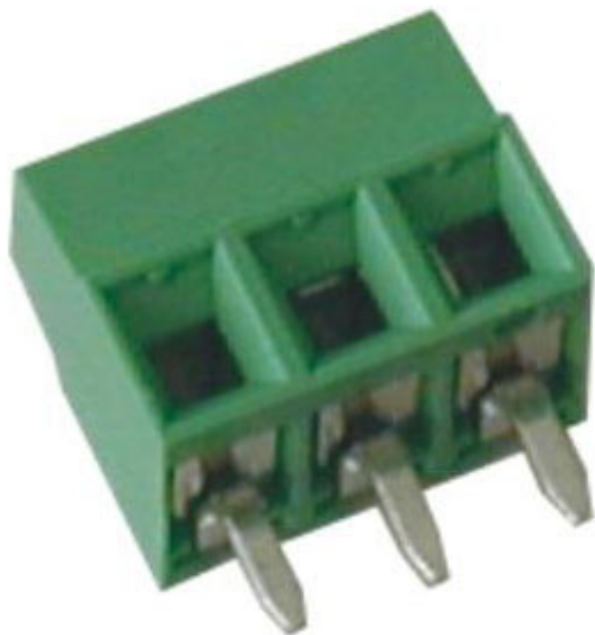

Version with antirotation pegs is available on 2 poles connections.
Disponibile per connessioni a 2 poli versioni con perni antitorsione.

Single-deck terminal block - Stackable version - Pitch 3,5mm - 2÷12 poles

GENERAL INFORMATION

pitch:	3,5 mm
housing height:	8,50 mm
housing depth:	7.3 mm
dimensional class:	slow
wire section:	1.0 mm ² / 16 AWG
clamp opening size:	1.8 × 1.8 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	17,5A
voltage:	130V
test voltage:	1.25 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2
max. torque:	0.2 Nm / 1.8 in.lbs

APPROVALS DATA



EN 60998-1

current: 13.5A

voltage: 130V

wire section: 1.0mm²

torque: 0.2Nm

FILE: CA02.04718



-
-
-
-
-



UL 1059

12A factory / 10A field

150V

16÷30AWG

1.8Lb-in

E178356

MATERIALS

housing: PA - UL 94 V0

AVAILABLE COLOURS

screw:
clamp/spring:
terminal:

Galvanized steel
Tin-plated copper alloy
Tin-plated copper alloy

GN^(STD)

GY

BK

BL

RD

YL

OG

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MV132-3,5-V-L	N/A	N/A	N/A
3	MV133-3,5-V-L	N/A	N/A	N/A
4	MV134-3,5-V-L	N/A	N/A	N/A
5	MV135-3,5-V-L	N/A	N/A	N/A
6	MV136-3,5-V-L	N/A	N/A	N/A
7	MV137-3,5-V-L	N/A	N/A	N/A
8	MV138-3,5-V-L	N/A	N/A	N/A
9	MV139-3,5-V-L	N/A	N/A	N/A
10	MV1310-3,5-V-L	N/A	N/A	N/A
11	MV1311-3,5-V-L	N/A	N/A	N/A
12	MV1312-3,5-V-L	N/A	N/A	N/A