


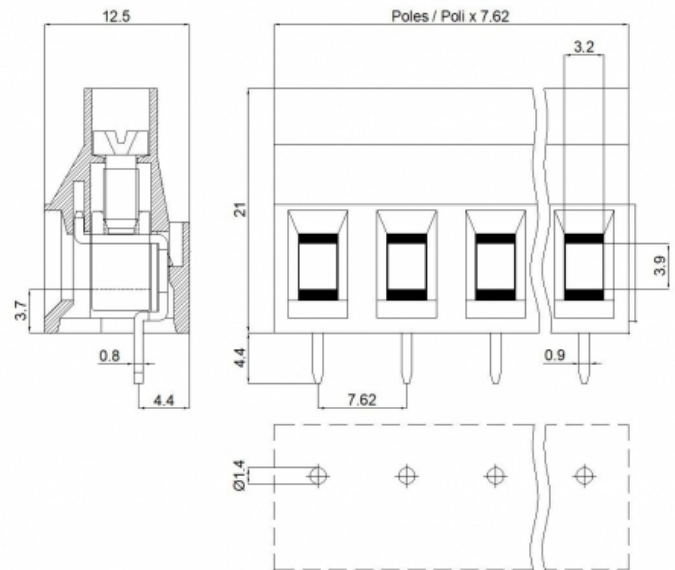

Single-deck terminal block - Modular version - Pitch 7,62mm - 2÷12 poles

GENERAL INFORMATION

pitch:	7,62 mm
housing height:	21,00 mm
housing depth:	12.5 mm
dimensional class:	high
wire section:	6.0 mm ² / 10 AWG
clamp opening size:	3.2 × 3.9 mm
wire stripping:	max 9 mm
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	32A
voltage:	750V
test voltage:	3 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M3
max. torque:	0.8 Nm / 7.2 in.lbs

APPROVALS DATA



EN 60998-1

current:	32A
voltage:	750V
wire section:	6.0mm ²
torque:	0.8Nm
FILE:	EP150



EN 60998-1

25A
750V
4.0mm ²
0.5Nm
40014734



UL 1059

30A factory / 30A field
300V
10÷30AWG
7.2Lb-in
E178356

MATERIALS

housing: PA - UL 94 V0
 screw: Galvanized steel
 clamp/spring: Nickeled copper alloy
 terminal: Tin-plated copper alloy

AVAILABLE COLOURS

other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MV472-7,62-V	N/A	N/A	N/A
3	MV473-7,62-V	N/A	N/A	N/A
4	MV474-7,62-V	N/A	N/A	N/A
5	MV475-7,62-V	N/A	N/A	N/A
6	MV476-7,62-V	N/A	N/A	N/A
7	MV477-7,62-V	N/A	N/A	N/A
8	MV478-7,62-V	N/A	N/A	N/A
9	MV479-7,62-V	N/A	N/A	N/A
10	MV4710-7,62-V	N/A	N/A	N/A
11	MV4711-7,62-V	N/A	N/A	N/A
12	MV4712-7,62-V	N/A	N/A	N/A