


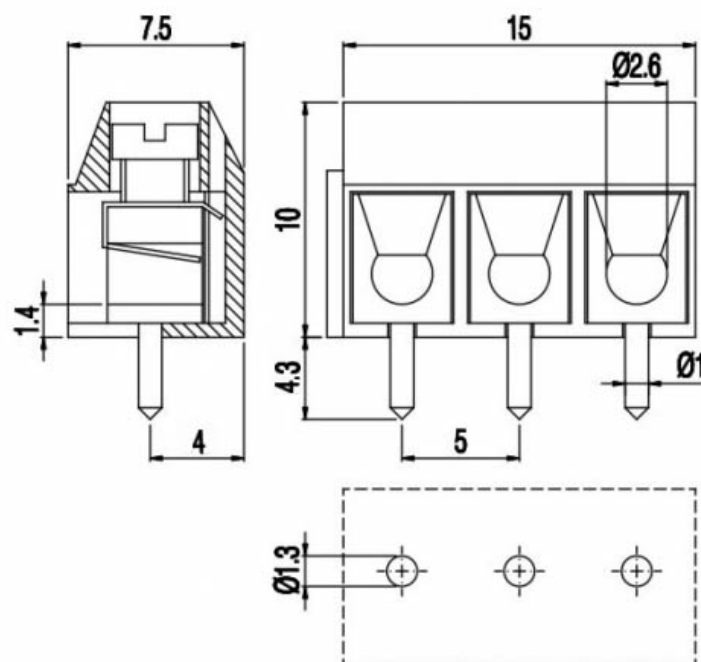

Single-deck terminal block - Modular version - Pitch 5mm - 2÷3 poles

GENERAL INFORMATION

pitch:	5 mm
housing height:	10,00 mm
housing depth:	7.5 mm
dimensional class:	slow
wire section:	1.5 mm ² / 16 AWG
clamp opening size:	Ø2.6 mm
wire stripping:	max 6 mm
operating temperature:	-40°C ÷ +105°C

ELECTRICAL CHARACTERISTICS

current:	16A
voltage:	250V
test voltage:	2 kVrms/60s

MECHANICAL CHARACTERISTICS

screw:	M2.5
max. torque:	0.4 Nm / 3.6 in.lbs

APPROVALS DATA



current:
voltage:
FILE:

-
-
-

-
-
-

-
-
-

MATERIALS

housing:	PA - UL 94 V0
screw:	Galvanized steel
clamp/spring:	Tin-plated copper alloy

AVAILABLE COLOURS

BK

other colours: upon request

terminal:

Copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
2	MVE132-5-V	N/A	N/A	N/A
3	MVE133-5-V	N/A	N/A	N/A
..	MVE13..-5-V	N/A	N/A	N/A