




PKI 10 A schwarz/black

Industrial Connectors:Measuring and Testing Equipment:Sockets:4 mm system

Product description

| | |
|----------------------|---|
| Description | Pole terminal with claw edge and captive insulated head and insulating ring. 4 mm diameter nickel-plated brass threaded bolt with 2 mm diameter transverse hole. For insulated, non-rotating installation in equipment chassis and switchpanels with a wall thickness up to 2 mm. |
| Type | PKI 10 A schwarz/black |
| Order No. | 930 103-100 |
| System | 4 mm system |
| Housing Color | black |
| Other standard types | red color, order no. 930 103-101; blue color, order no. 930 103-102; yellow color, order no. 930 103-103; green color, order no. 930 103-104; yellow/green color, order no. 930 103-188 |

Drawing

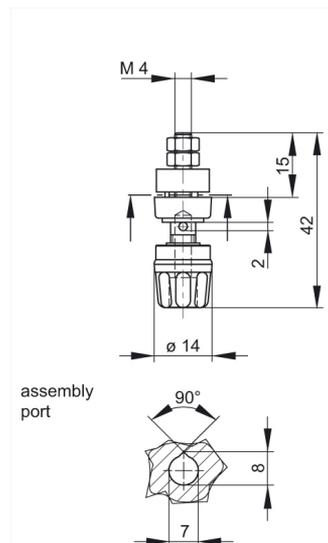

Technical data

| | |
|---------------------|------------|
| Type of contact | socket |
| Type of termination | M 4 thread |
| Rated voltage | DC 60 V |
| Rated current | 35 A |
| Contact resistance | 2 mOhm |
| Mounting | screw |

Material

| | |
|---------------------------------|-------------------|
| Contact material | brass |
| Contact surface material | nickel-plated |
| Housing material | PF |
| Environmental conditions | |
| Temperature range | -25 °C to +100 °C |
| Inflammability class | |
| Housing | 94 V-0 |