


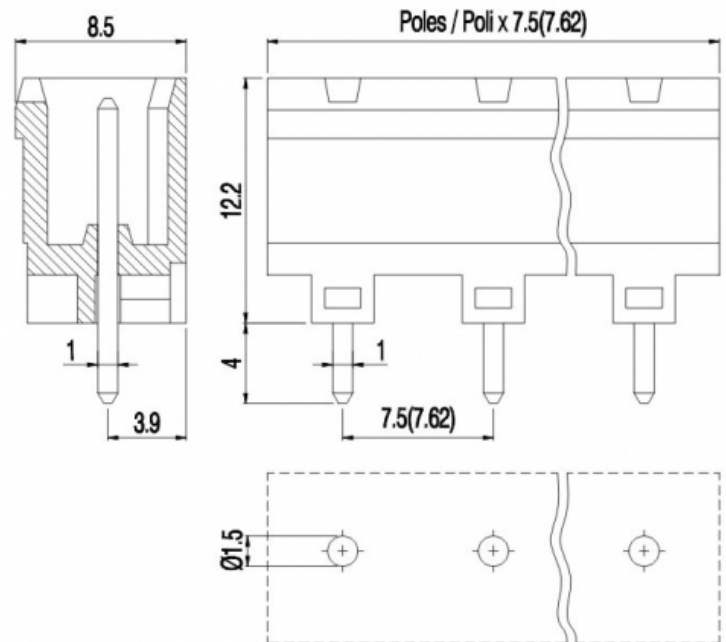

Male plug-in connector - with closed ends - Side-by-side version - Pitch 7,62mm - 02 ÷ 16 poles

GENERAL INFORMATION

pitch:	7,62 mm
housing height:	12,20 mm
housing depth:	8.5 mm
dimensional class:	medium
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	15A
voltage:	500V
impulse voltage:	6 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



EN 61984

current:	16A
voltage:	500V
FILE:	CA02.04178



EN 61984

current:	15A
voltage:	500V
FILE:	40005779



UL 1059

current:	16A factory / 16A field
voltage:	300V
FILE:	E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a
terminal:	Tin-plated copper alloy

AVAILABLE COLOURS



other colours:

upon request

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PV02-7,62-V-P	N/A	N/A	N/A
03	PV03-7,62-V-P	N/A	N/A	N/A
04	PV04-7,62-V-P	N/A	N/A	N/A
05	PV05-7,62-V-P	N/A	N/A	N/A
06	PV06-7,62-V-P	N/A	N/A	N/A
07	PV07-7,62-V-P	N/A	N/A	N/A
08	PV08-7,62-V-P	N/A	N/A	N/A
09	PV09-7,62-V-P	N/A	N/A	N/A
10	PV10-7,62-V-P	N/A	N/A	N/A
11	PV11-7,62-V-P	N/A	N/A	N/A
12	PV12-7,62-V-P	N/A	N/A	N/A
13	PV13-7,62-V-P	N/A	N/A	N/A
14	PV14-7,62-V-P	N/A	N/A	N/A
15	PV15-7,62-V-P	N/A	N/A	N/A
16	PV16-7,62-V-P	N/A	N/A	N/A