
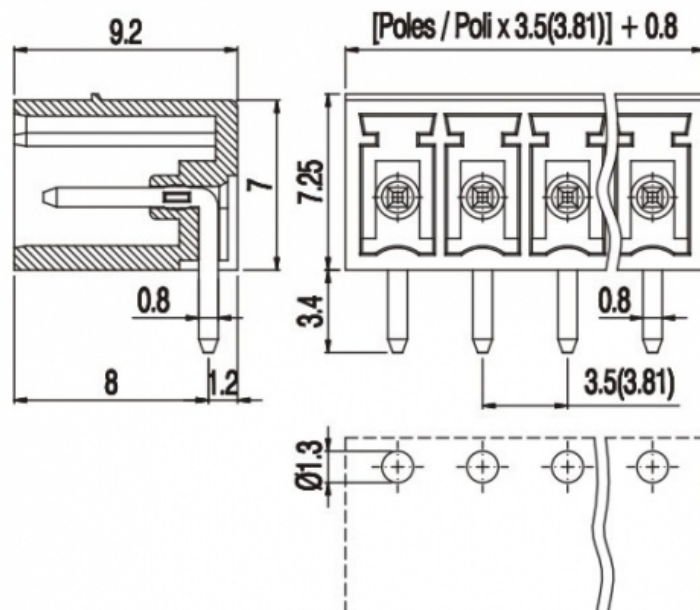


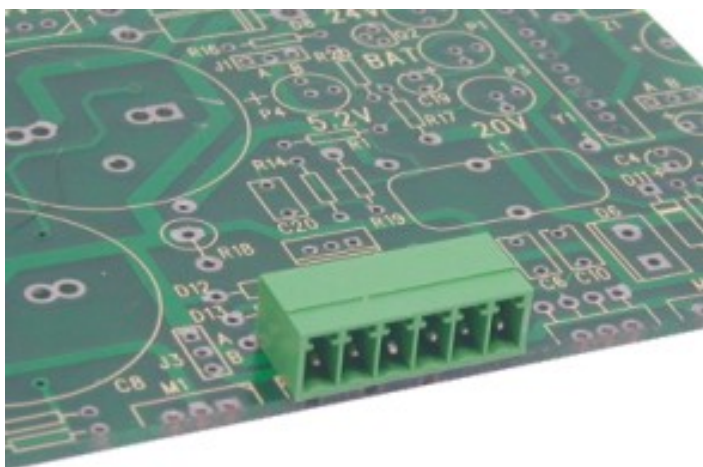

Male plug-in connector - with closed ends - Pitch 3,81mm - 02 ÷ 24 poles

GENERAL INFORMATION

pitch:	3,81 mm
housing height:	7,25 mm
housing depth:	9.2 mm
dimensional class:	slow
wire section:	-
clamp opening size:	-
wire stripping:	-
operating temperature:	-40°C ÷ +130°C

ELECTRICAL CHARACTERISTICS

current:	11A
voltage:	160V
impulse voltage:	2.5 kV

MECHANICAL CHARACTERISTICS

APPROVALS DATA



-

current:

-

voltage:

-

FILE:

-



EN 61984
11A 2/3 poles
9A 4÷24 poles

160V

40048261



UL 1059
11A factory / 11A field

300V

E178356

MATERIALS

housing:	PA - UL 94 V0
screw:	n/a
clamp/spring:	n/a

AVAILABLE COLOURS

GN (STD)	GY	BK	BL	RD	YL	OG
other colours:	upon request					

terminal:

Tin-plated copper alloy

poles	P/N	pcs/pack	W [Kg]*	W [Kg]*
02	PV02-3,81-H-P	N/A	N/A	N/A
03	PV03-3,81-H-P	N/A	N/A	N/A
04	PV04-3,81-H-P	N/A	N/A	N/A
05	PV05-3,81-H-P	N/A	N/A	N/A
06	PV06-3,81-H-P	N/A	N/A	N/A
07	PV07-3,81-H-P	N/A	N/A	N/A
08	PV08-3,81-H-P	N/A	N/A	N/A
09	PV09-3,81-H-P	N/A	N/A	N/A
10	PV10-3,81-H-P	N/A	N/A	N/A
11	PV11-3,81-H-P	N/A	N/A	N/A
12	PV12-3,81-H-P	N/A	N/A	N/A
13	PV13-3,81-H-P	N/A	N/A	N/A
14	PV14-3,81-H-P	N/A	N/A	N/A
15	PV15-3,81-H-P	N/A	N/A	N/A
16	PV16-3,81-H-P	N/A	N/A	N/A
17	PV17-3,81-H-P	N/A	N/A	N/A
18	PV18-3,81-H-P	N/A	N/A	N/A
19	PV19-3,81-H-P	N/A	N/A	N/A
20	PV20-3,81-H-P	N/A	N/A	N/A
21	PV21-3,81-H-P	N/A	N/A	N/A
22	PV22-3,81-H-P	N/A	N/A	N/A
23	PV23-3,81-H-P	N/A	N/A	N/A
24	PV24-3,81-H-P	N/A	N/A	N/A