





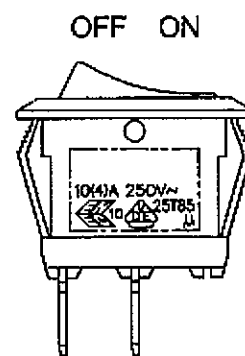


Rating	16A 125VAC 10A 250VAC	CULUS	Mounting Hole	
	10(4)A 250V~	10 25T85		
	10A 125VAC 6A 250VAC	CQC		
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	2P SPST ON-OFF		Thickness:2.0~3.0 Thickness:0.7~3.0	

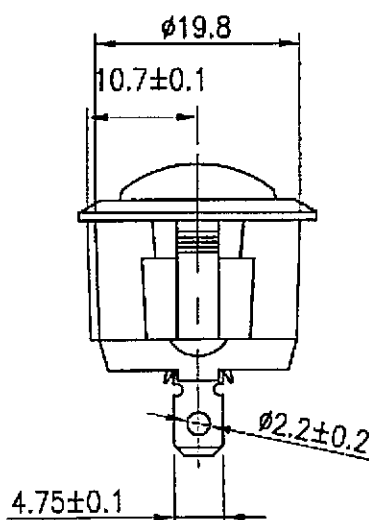

Material :
Frame : Black; Nylon 66 (94-V2)
Actuator : Black; Nylon 66 (94-V2)
Hot stamping : White; 0 -

Circuit Diagram

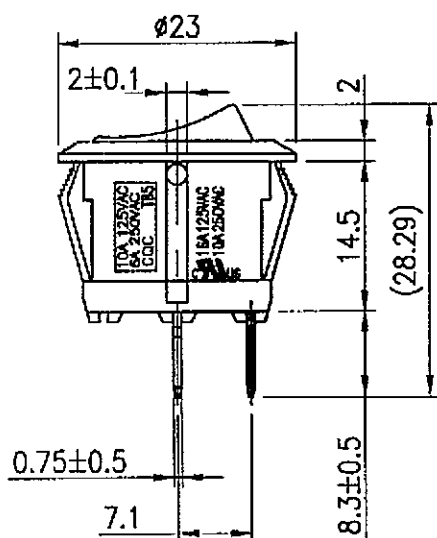

1. Tolerances Unless Otherwise Specified ± 0.3

01/18/11	Zhong	刻字内容更新			A	
09/24/09	曹盈芳	更正Rating原10A 125V AC→16A 125V AC			A	
Date	Name	Description			No.	
Drawn	Checked	Approved	SCI BOM No.	1820861	Model Name	ROCKER SWITCH
Zhong	杨金2	王华	Customer No.		Model No.	R13-112A-02
01/18/11	1/20-11	1/20-11	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 2