


NON-INSULATED
RING TERMINALS

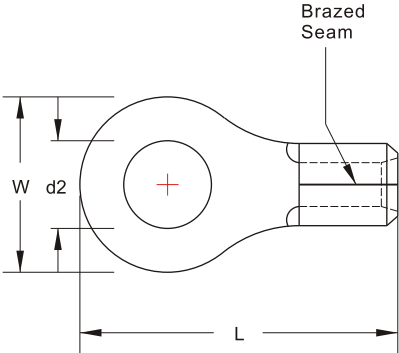

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16
AMP.	9	12	17	18


TERMINAL MATERIAL: COPPER

A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
22-16	RNB1-2.5	RN1-2.5	2.4 (.095)	5.5 (.217)	12.4 (.488)
	RNB1-3.2 *	RN1-3.2	3.2 (.126)	5.5 (.217)	12.5 (.492)
	RNBS1-3.7 *	RNS1-3.7	3.7 (.146)		
	RNBM1-3.7 *	RNM1-3.7	3.7 (.146)	6.6 (.260)	14.4 (.567)
	RNBL1-3.7 *	RNL1-3.7	3.7 (.146)	8.0 (.315)	15.8 (.622)
	RNBS1-4 *	RNS1-4	4.3 (.169)	6.6 (.260)	14.4 (.567)
	RNBL1-4 *	RNL1-4	4.3 (.169)	8.0 (.315)	15.8 (.622)
	RNB1-5 *	RN1-5	5.3 (.209)		
	RNBL1-5	RNL1-5	5.3 (.209)	11.6 (.457)	21.8 (.858)
	RNB1-6 *	RN1-6	6.4 (.252)		
	RNB1-8 *	RN1-8	8.4 (.331)		
	RNB1-10 *	RN1-10	10.5 (.413)	13.6 (.535)	25.5 (1.004)
	RNB1-12	RN1-12	13.0 (.512)	19.2 (.756)	30.4 (1.197)
	RNB1-13	RN1-13	14.0 (.551)		
	RNB1-14	RN1-14	15.0 (.591)	27.0 (1.063)	39.3 (1.547)
	RNB1-16	RN1-16	17.0 (.669)		
	RNB1-20	RN1-20	21.0 (.827)		

ALL LISTED
* : ADDITIONAL CERTIFIED

NON-INSULATED TERMINALS

NON-INSULATED RING TERMINALS

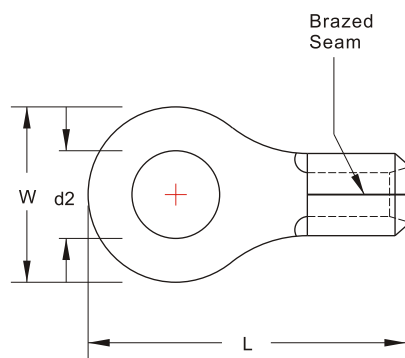

MAXIMUM ELECTRIC CURRENT:

A.W.G.	16	14	12
AMP.	18	30	35

TERMINAL MATERIAL: COPPER

A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
16-14	RNBS2-3.2	RNS2-3.2	3.2 (.126)	5.5 (.217)	13.2 (.520)
	RNB2-3.2 *	RN2-3.2	3.2 (.126)	6.6 (.260)	12.8 (.504)
	RNBL2-3.2	RNL2-3.2	3.2 (.126)	8.5 (.335)	16.8 (.661)
	RNBS2-3.7 *	RNS2-3.7	3.7 (.146)	6.6 (.260)	12.8 (.504)
	RNBM2-3.7 *	RNM2-3.7	3.7 (.146)		14.4 (.567)
	RNBL2-3.7 *	RNL2-3.7	3.7 (.146)	8.5 (.335)	16.5 (.650)
	RNBS2-4 *	RNS2-4	4.3 (.169)	6.6 (.260)	14.4 (.567)
	RNBL2-4 *	RNL2-4	4.3 (.169)	8.5 (.335)	16.5 (.650)
	RNBS2-5 *	RNS2-5	5.3 (.209)		
	RNBL2-5 *	RNL2-5	5.3 (.209)	9.5 (.374)	17.0 (.669)
	RNB2-6 *	RN2-6	6.4 (.252)	12.0 (.472)	21.8 (.858)
	RNB2-8 *	RN2-8	8.4 (.331)		
	RNB2-9	RN2-9	9.8 (.386)	13.6 (.535)	25.5 (1.004)
	RNB2-10 *	RN2-10	10.5 (.413)		
	RNB2-12	RN2-12	13.0 (.512)	19.2 (.756)	30.4 (1.197)
	RNB2-14	RN2-14	15.0 (.591)	27.0 (1.063)	
	RNB2-16	RN2-16	17.0 (.669)		39.3 (1.547)
	RNB2-20	RN2-20	21.0 (.827)		
14-12	RNB3-4	RN3-4	4.3 (.169)	8.0 (.315)	18.0 (.709)
	RNBS3-5	RNS3-5	5.3 (.209)		
	RNBM3-5	RNM3-5	5.3 (.209)	9.5 (.374)	20.0 (.787)
	RNBL3-5	RNL3-5	5.3 (.209)	12.0 (.472)	21.4 (.843)
	RNB3-6	RN3-6	6.4 (.252)		
	RNB3-8	RN3-8	8.4 (.331)	15.0 (.591)	27.0 (1.063)
	RNB3-10	RN3-10	10.5 (.413)		
	RNB3-12	RN3-12	13.0 (.512)	19.2 (.756)	31.6 (1.244)




ALL LISTED
* : ADDITIONAL



NON-INSULATED TERMINALS



NON-INSULATED RING TERMINALS

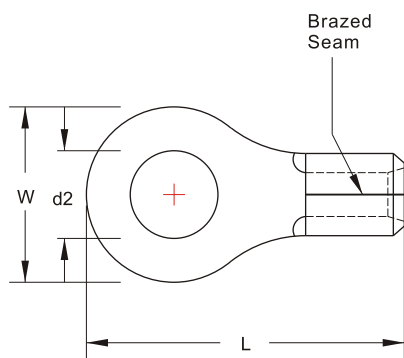

MAXIMUM ELECTRIC CURRENT:

A.W.G.	12	10	8
AMP.	35	50	70

TERMINAL MATERIAL: COPPER


A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
12-10	RNB5-3.2	RN5-3.2	3.2 (.126)	7.2 (.283)	15.5 (.610)
	RNB5-3.7 *	RN5-3.7	3.7 (.146)		15.7 (.618)
	RNBS5-4 *	RNS5-4	4.3 (.169)	7.2 (.283)	15.7 (.618)
	RNBL5-4 *	RNL5-4	4.3 (.169)		15.7 (.618)
	RNB5-5 *	RN5-5	5.3 (.209)	9.5 (.374)	19.0 (.748)
	RNB5-6 *	RN5-6	6.4 (.252)		19.0 (.748)
	RNBM5-6	RNM5-6	7.4 (.291)	12.0 (.472)	22.5 (.886)
	RNB5-8 *	RN5-8	8.4 (.331)		19.05 (.750)
	RNB5-10 *	RN5-10	10.5 (.413)	15.0 (.591)	27.0 (1.063)
	RNB5-12 *	RN5-12	13.0 (.512)		27.0 (1.063)
	RNB5-14	RN5-14	15.0 (.591)	19.2 (.756)	31.6 (1.244)
	RNB5-16	RN5-16	17.0 (.669)		31.6 (1.244)
	RNB5-18	RN5-18	19.0 (.748)		31.6 (1.244)
	RNB5-20	RN5-20	21.0 (.827)		31.6 (1.244)
8	RNB8-3.7		3.7 (.146)	8.0 (.315)	21.5 (.846)
	RNBS8-4		4.3 (.169)		21.5 (.846)
	RNBL8-4		4.3 (.169)	12.0 (.472)	23.8 (.937)
	RNBS8-5		5.3 (.209)	8.8 (.346)	23.8 (.937)
	RNBM8-5 *		5.3 (.209)	12.0 (.472)	
	RNBL8-5		5.3 (.209)	15.0 (.591)	29.8 (1.173)
	RNBS8-6 *		6.4 (.252)	12.0 (.472)	23.3 (.917)
	RNBL8-6		6.4 (.252)	15.0 (.591)	29.2 (1.150)
	RNB8-8 *		8.4 (.331)	15.0 (.591)	29.2 (1.150)
	RNB8-10 *		10.5 (.413)		29.2 (1.150)
	RNB8-11		11.5 (.453)	20.0 (.787)	33.5 (1.319)
	RNB8-12		13.0 (.512)		33.5 (1.319)
	RNB8-14		15.0 (.591)	31.6 (1.244)	49.5 (1.949)
	RNB8-16		17.0 (.669)		49.5 (1.949)
	RNB8-18		19.0 (.748)		49.5 (1.949)
	RNB8-20		21.0 (.827)		49.5 (1.949)
	RNB8-22		23.0 (.906)		



ALL LISTED
* : ADDITIONAL



NON-INSULATED RING TERMINALS

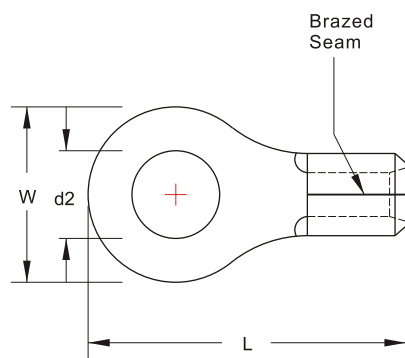

MAXIMUM ELECTRIC CURRENT:

A.W.G.	6	4
AMP.	95	125

TERMINAL MATERIAL: COPPER

A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
6	RNB14-4		4.3 (.169)	12.0 (.472)	29.2 (1.150)
	RNB14-5		5.3 (.209)		
	RNBS14-5		5.3 (.209)	9.5 (.374)	28.2 (1.110)
	RNBS14-6 *		6.4 (.252)	12.0 (.472)	29.2 (1.150)
	RNBL14-6		6.4 (.252)	16.0 (.630)	32.5 (1.280)
	RNB14-8 *		8.4 (.331)		
	RNB14-10 *		10.5 (.413)		
	RNB14-11		11.5 (.453)	22.0 (.866)	41.0 (1.614)
	RNB14-12		13.0 (.512)		
	RNB14-14		15.0 (.591)	31.6 (1.244)	51.0 (2.008)
	RNB14-16		17.0 (.669)		
	RNB14-18		19.0 (.748)		
	RNB14-20		21.0 (.827)		
4	RNBS22-4		4.3 (.169)	12.2 (.480)	33.2 (1.307)
	RNBS22-5		5.3 (.209)		
	RNBL22-5		5.3 (.209)	16.5 (.650)	33.5 (1.319)
	RNBS22-6		6.4 (.252)	12.2 (.480)	33.0 (1.299)
	RNBL22-6 *		6.4 (.252)	16.5 (.650)	33.5 (1.319)
	RNB22-8 *		8.4 (.331)		
	RNBS22-8		8.4 (.331)	12.2 (.480)	33.2 (1.307)
	RNB22-10		10.5 (.413)	16.5 (.650)	33.5 (1.319)
	RNBL22-10		10.5 (.413)	17.5 (.689)	36.7 (1.445)
	RNB22-11		11.5 (.453)	22.0 (.866)	42.5 (1.673)
	RNB22-12		13.0 (.512)		
	RNB22-14		15.0 (.591)	30.0 (1.181)	51.0 (2.008)
	RNB22-16		17.0 (.669)		
	RNB22-18		19.0 (.748)		
	RNB22-20		21.0 (.827)		



ALL LISTED
*: ADDITIONAL




CERTIFIED

NON-INSULATED TERMINALS

C1

NON-INSULATED RING TERMINALS

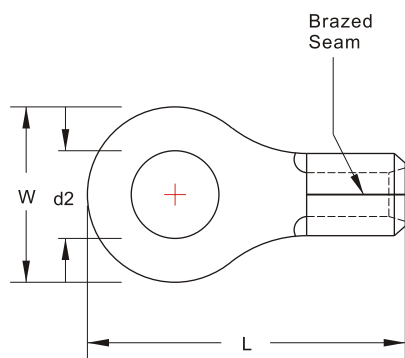

MAXIMUM ELECTRIC CURRENT:

A.W.G.	2	1/0	2/0
--------	---	-----	-----

AMP.	170	230	265
------	-----	-----	-----

TERMINAL MATERIAL: COPPER

A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
2	RNB38-5		5.3 (.209)	15.3 (.602)	39.0 (1.535)
	RNBS38-6 *		6.4 (.252)		
	RNBL38-6		6.4 (.252)	22.0 (.866)	42.7 (1.681)
	RNBS38-8 *		8.4 (.331)	15.3 (.602)	39.0 (1.535)
	RNBL38-8		8.4 (.331)	22.0 (.866)	42.7 (1.681)
	RNBS38-10 *		10.5 (.413)	15.3 (.602)	39.0 (1.535)
	RNBL38-10		10.5 (.413)	22.0 (.866)	42.7 (1.681)
	RNB38-11		11.5 (.453)		
	RNB38-12 *		13.0 (.512)		
	RNB38-13		14.0 (.551)	30.0 (1.181)	52.0 (2.047)
	RNB38-14		15.0 (.591)		
	RNB38-16		17.0 (.669)		
	RNB38-18		19.0 (.748)		
	RNB38-20		21.0 (.827)		
1/0	RNB60-6		6.4 (.252)	22.0 (.866)	49.7 (1.957)
	RNB60-8		8.4 (.331)		
	RNB60-10		10.5 (.413)		
	RNBL60-10		10.5 (.413)	32.0 (1.260)	57.0 (2.244)
	RNB60-11		11.5 (.453)	22.0 (.866)	49.7 (1.957)
	RNB60-12		13.0 (.512)		
	RNBL60-12		13.0 (.512)	32.0 (1.260)	57.0 (2.244)
	RNB60-13		14.0 (.551)	22.0 (.866)	49.7 (1.957)
	RNB60-14		15.0 (.591)	32.0 (1.260)	57.5 (2.264)
	RNB60-16		17.0 (.669)		
	RNB60-18		19.0 (.748)		
	RNB60-20		21.0 (.827)		
	RNB60-22		23.0 (.906)		
2/0	RNB70-6		6.4 (.252)	24.0 (.945)	50.0 (1.969)
	RNB70-8		8.4 (.331)		
	RNB70-10		10.5 (.413)		
	RNB70-11		11.5 (.453)		
	RNB70-12		13.0 (.512)		
	RNB70-13		14.0 (.551)	32.0 (1.260)	61.0 (2.402)
	RNB70-14		15.0 (.591)		
	RNB70-16		17.0 (.669)		
	RNB70-18		19.0 (.748)		
	RNB70-20		21.0 (.827)		
	RNB70-22		23.0 (.906)		




ALL LISTED

* : ADDITIONAL



CERTIFIED

**NON-INSULATED
RING TERMINALS**

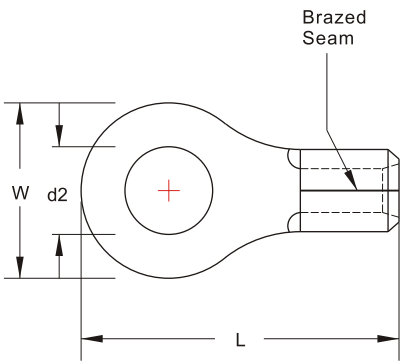

MAXIMUM ELECTRIC CURRENT:


A.W.G.	3/0	4/0	250	300
AMP.	310	360	405	445

TERMINAL MATERIAL: COPPER

A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
3/0	RNB80-6		6.4 (.252)	27.0(1.063)	54.2(2.134)
	RNB80-8		8.4 (.331)		
	RNB80-10		10.5 (.413)		
	RNB80-11		11.5 (.453)		
	RNB80-12		13.0 (.512)		
	RNB80-13		14.0 (.551)		
	RNB80-14		15.0 (.591)	32.0(1.260)	68.0(2.677)
	RNB80-16		17.0 (.669)		
	RNB80-18		19.0 (.748)		
	RNB80-20		21.0 (.827)		
	RNB80-22		23.0 (.906)		
4/0	RNB100-6		6.4 (.252)	28.5(1.122)	55.6(2.189)
	RNB100-8		8.4 (.331)		
	RNB100-10		10.5 (.413)		
	RNB100-11		11.5 (.453)		
	RNB100-12		13.0 (.512)		
	RNB100-14		15.0 (.591)	32.0(1.260)	69.0(2.717)
	RNB100-16		17.0 (.669)		
	RNB100-18		19.0 (.748)		
	RNB100-20		21.0 (.827)		
	RNB100-22		23.0 (.906)		
250/300 MCM	RNB150-8		8.4 (.331)	36.0(1.417)	66.0(2.598)
	RNBL150-8		8.4 (.331)		81.0(3.189)
	RNB150-10		10.5(.413)		66.0(2.598)
	RNBL150-10		10.5(.413)		81.0(3.189)
	RNB150-11		11.5(.453)		66.0(2.598)
	RNB150-12		13.0(.512)		81.0(3.189)
	RNBL150-12		13.0(.512)		
	RNB150-14		15.0(.591)		66.0(2.598)
	RNB150-16		17.0(.669)	36.0(1.417)	81.0(3.189)
	RNBL150-16		17.0(.669)		
	RNB150-18		19.0(.748)		
	RNB150-20		21.0(.827)		
	RNB150-22		23.0(.906)		
	RNB150-24		25.0(.984)		
	RNB150-27		28.0(1.102)		

  ALL LISTED

NON-INSULATED
RING TERMINALS

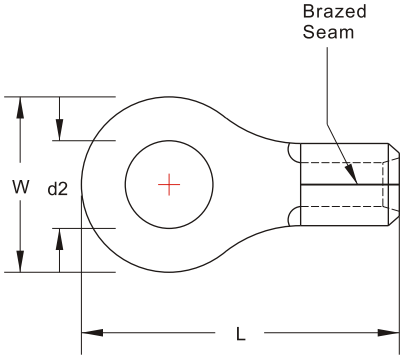

MAXIMUM ELECTRIC CURRENT:
A.W.G. 300 350 400 500 600
AMP. 445 505 545 620 690
TERMINAL MATERIAL: COPPER


A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
300/350 MCM	RNB180-8		8.4 (.331)	38.5 (1.516)	69.0 (2.717)
	RNB180-10		10.5 (.413)		
	RNB180-11		11.5 (.453)		
	RNB180-12		13.0 (.512)		86.6 (3.409)
	RNBL180-12		13.0 (.512)		
	RNB180-14		15.0 (.591)	38.5 (1.516)	69.0 (2.717)
	RNB180-16		17.0 (.669)		
	RNB180-18		19.0 (.748)		86.6 (3.409)
	RNB180-20		21.0 (.827)		86.6 (3.409)
	RNB180-22		23.0 (.906)		
	RNB180-24		25.0 (.984)		
	RNB180-27		28.0 (1.102)		
400/500 MCM	RNB200-8		8.4 (.331)	44.0 (1.732)	72.0 (2.835)
	RNBL200-8		8.4 (.331)		90.5 (3.563)
	RNB200-10		10.5 (.413)		72.0 (2.835)
	RNB200-11		11.5 (.453)		
	RNB200-12		13.0 (.512)		90.5 (3.563)
	RNBL200-12		13.0 (.512)		
	RNB200-14		15.0 (.591)		72.0 (2.835)
	RNB200-16		17.0 (.669)		90.5 (3.563)
	RNBL200-16		17.0 (.669)		
	RNB200-18		19.0 (.748)	44.0 (1.732)	91.0 (3.583)
	RNB200-20		21.0 (.827)		
	RNB200-22		23.0 (.906)		
	RNB200-24		25.0 (.984)		
	RNB200-27		28.0 (1.102)		
500/600 MCM	RNB325-8		8.4 (.331)	50.5 (1.988)	88.0 (3.465)
	RNB325-10		10.5 (.413)		
	RNB325-11		11.5 (.453)		
	RNB325-12		13.0 (.512)		
	RNBL325-12		13.0 (.512)	50.5 (1.988)	105.7 (4.161)
	RNB325-14		15.0 (.591)		88.0 (3.465)
	RNB325-16		17.0 (.669)		
	RNBL325-16		17.0 (.669)	50.5 (1.988)	105.7 (4.161)
	RNB325-18		19.0 (.748)		
	RNB325-20		21.0 (.827)		
	RNB325-22		23.0 (.906)		
	RNB325-24		25.0 (.984)		
	RNB325-27		28.0 (1.102)		

UL cUL ALL LISTED

NON-INSULATED TERMINALS

C1

**NON-INSULATED HEAVY DUTY (HD SERIES)
RING TERMINALS**

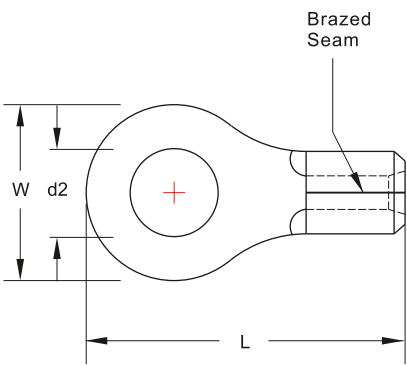

MAXIMUM ELECTRIC CURRENT:

A.W.G.	16	14
AMP.	18	30

TERMINAL MATERIAL: COPPER

A.W.G.	BRAZED SEAM	BUTTED SEAM	d2 mm(inch)	W mm(inch)	L mm(inch)
16-14	RNB2-3.2-HD	RN2-3.2-HD	3.2 (.126)	7.2 (.283)	15.5 (.610)
	RNB2-3.7-HD	RN2-3.7-HD	3.7 (.146)		15.7 (.618)
	RNBS2-4-HD	RNS2-4-HD	4.3 (.169)	9.5 (.374)	19.0 (.748)
	RNBL2-4-HD	RNL2-4-HD	4.3 (.169)		
	RNB2-5-HD	RN2-5-HD	5.3 (.209)		
	RNB2-6-HD	RN2-6-HD	6.4 (.252)	12.0 (.472)	22.5 (.886)
	RNBM2-6-HD	RNM2-6-HD	6.4 (.252)		25.0 (.984)
	RNB2-8-HD	RN2-8-HD	8.4 (.331)	15.0 (.591)	27.0 (1.063)
	RNB2-10-HD	RN2-10-HD	10.5 (.413)		
	RNB2-12-HD	RN2-12-HD	13.0 (.512)	19.2 (.756)	31.6 (1.244)
	RNB2-14-HD	RN2-14-HD	15.0 (.591)		
	RNB2-16-HD	RN2-16-HD	17.0 (.669)		
	RNB2-18-HD	RN2-18-HD	19.0 (.748)		
	RNB2-20-HD	RN2-20-HD	21.0 (.827)	32.0 (1.260)	47.2 (1.858)

NON-INSULATED TERMINALS

