


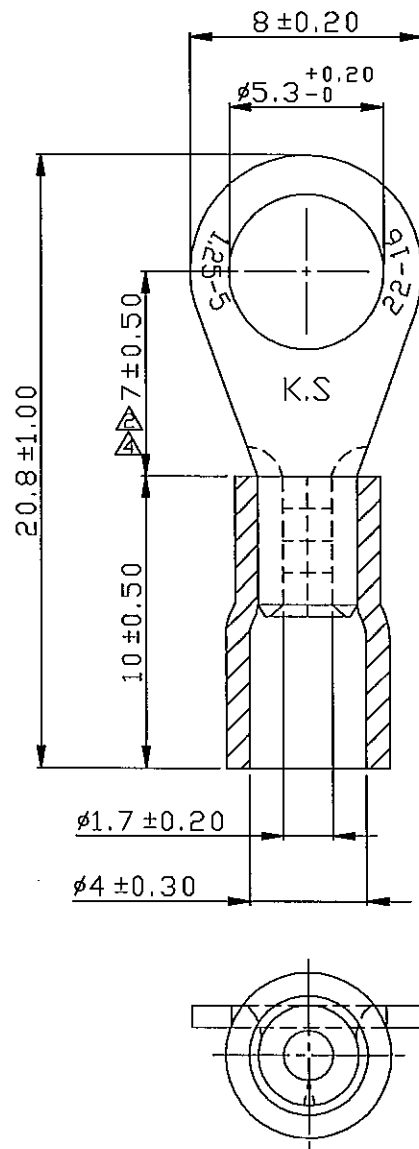

REV	DESCRIPTION	DATE
△	RDK-97048	謝婉如 2009/04/13
△	RDK-97127	謝婉如 2009/04/13
△	RDK-98020	謝婉如 2009/04/13
△	RDCM-106052	林淑慎 2017/03/20

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : RED
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.75 mm

△	Tolerance Unless Otherwise Specified
0 >	mm ±
>	mm ±
>	mm ±
>	mm ±
0°	° REF ±
°	° ±
°	° ±

NAME	VINYL-INSULATED RING TERMINALS	UNIT	mm	△
PART NO.	RV1-5	MATERIAL	-----	APPROVE
NUMBER	KA-951077-C	SCALE	SHEET	PAGE
DATE	2006/08/31	4/1	1-4	10F1
DRAWN	張馨尹			

KST. K.S. TERMINALS INC.