
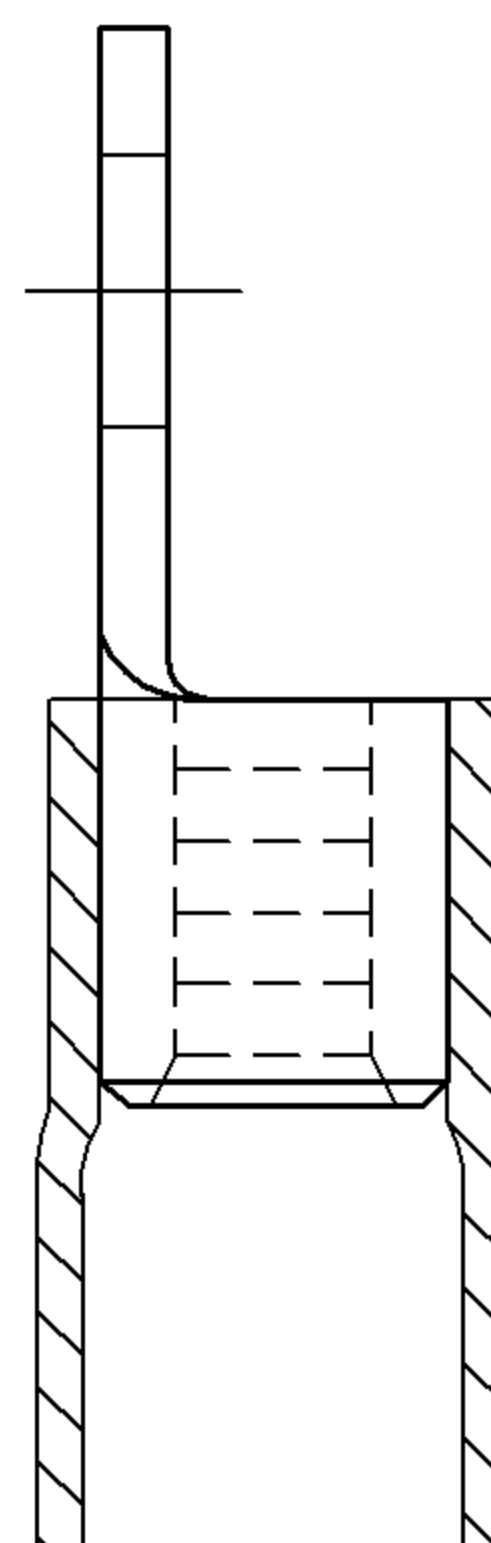
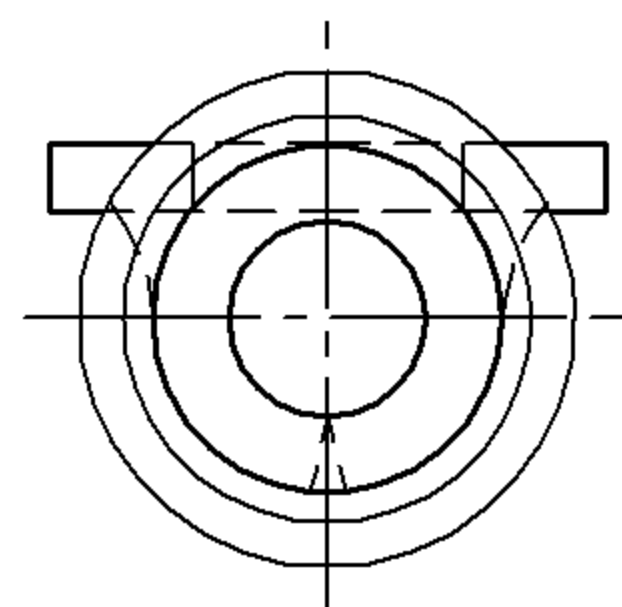


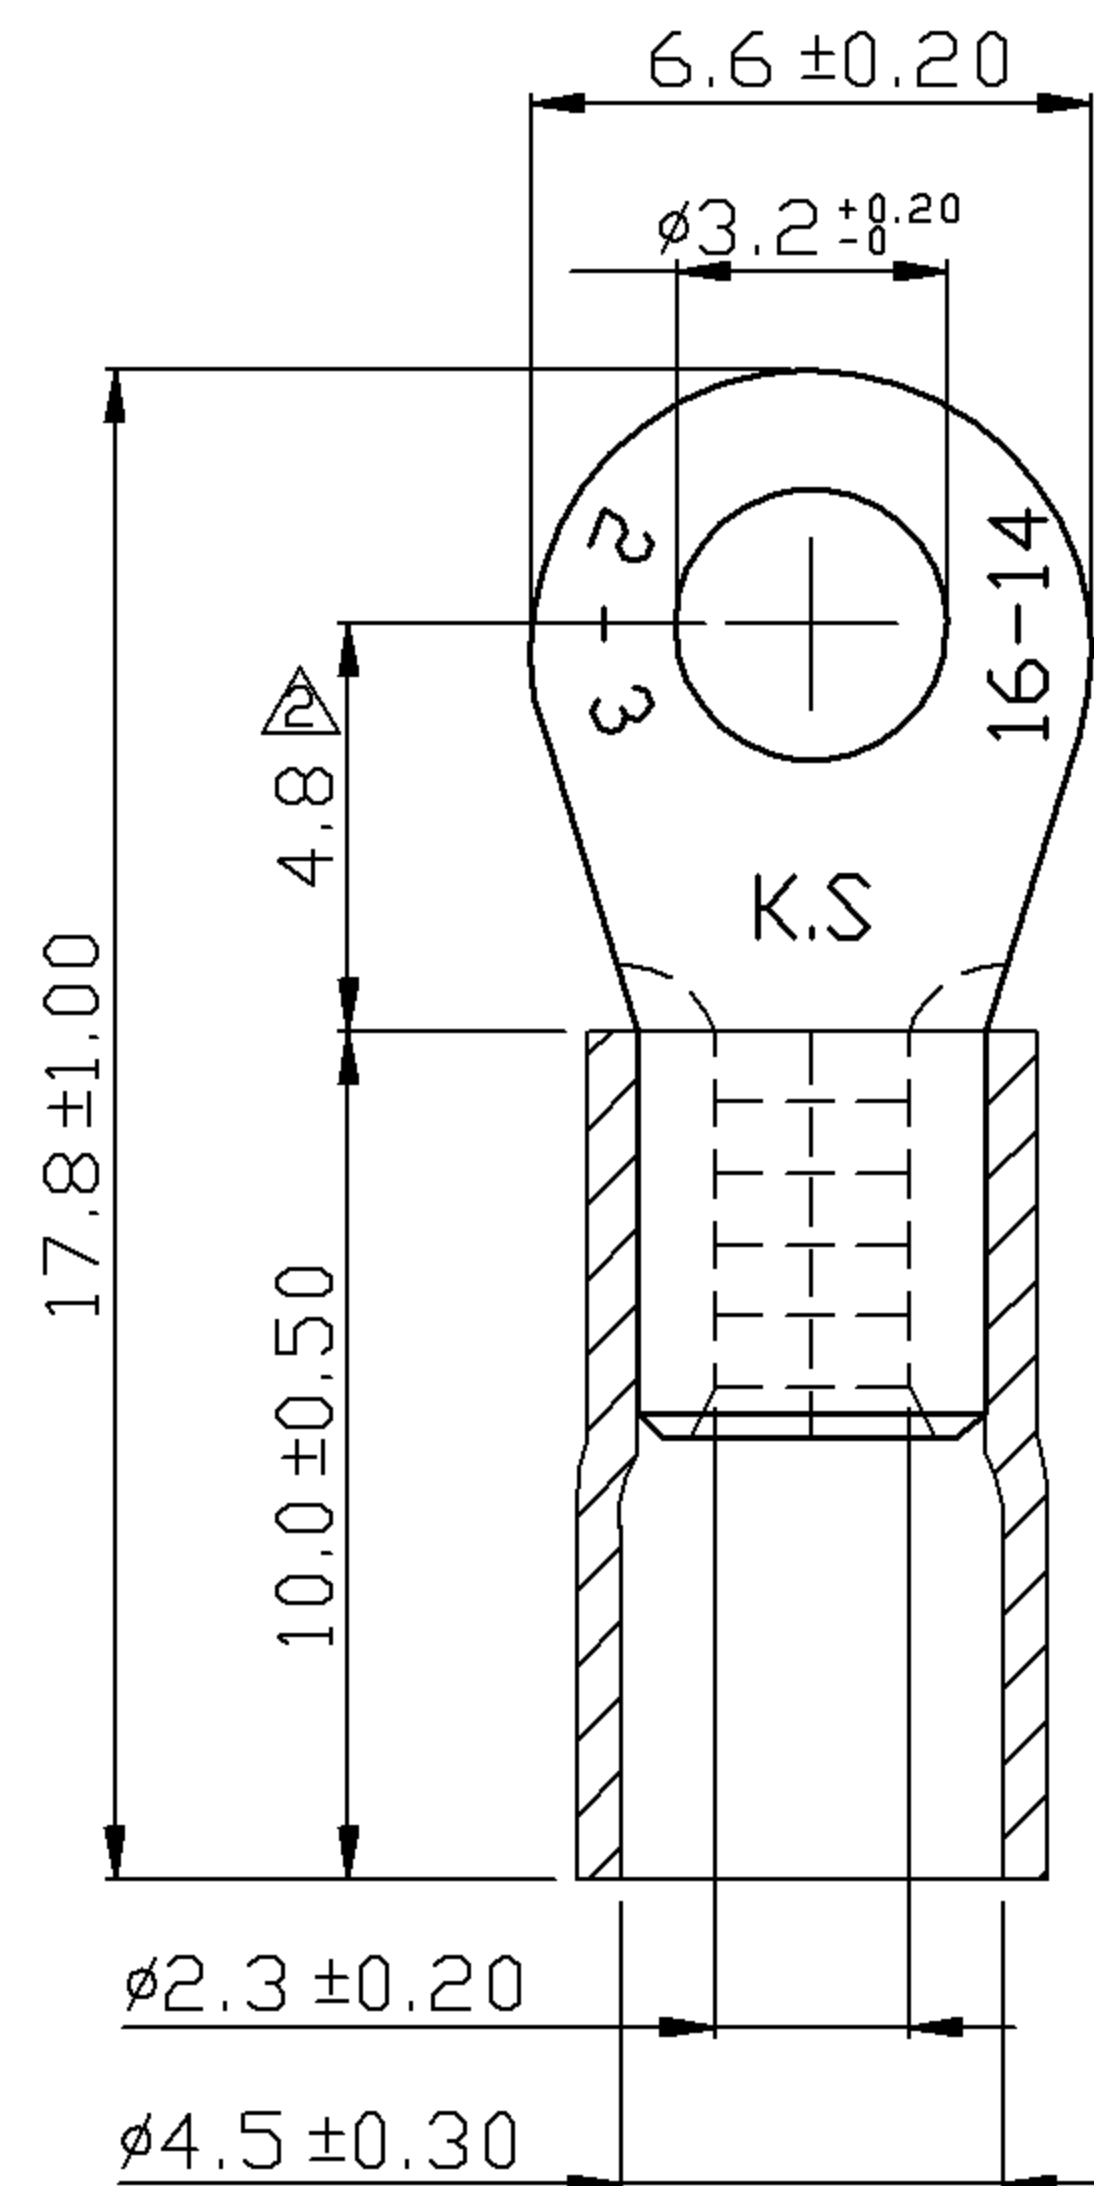

REV	DESCRIPTION	DATE
△	RDK-97048	謝婉如 2009/05/13
△	RDK-97127	謝婉如 2009/05/13
△	RDK-98020	謝婉如 2009/05/13

NOTE:

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	18	30	
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 16-14 A.W.G.($1.5-2.5 \text{ mm}^2$)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.80 mm

△	Tolerance Unless Otherwise Specified
0 >	mm ±
>	mm ±
>	mm ±
>	mm ±

NAME	VINYL-INSULATED RING TERMINALS				UNIT	mm
PART NO.	RV2-3.2	MATERIAL	-----	APPROVE	張馨尹	
NUMBER	KA-951479-C	SCALE	SHEET	PAGE	CHECKED	張馨尹
DATE	2006/09/28	4/1	1-3	10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.