


VINYL-INSULATED  
RING TERMINALS

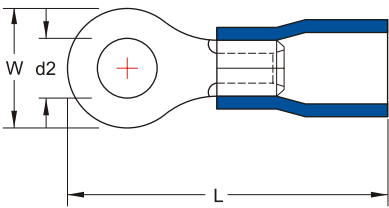

MAXIMUM ELECTRIC CURRENT :

|        |    |    |    |    |    |
|--------|----|----|----|----|----|
| A.W.G. | 22 | 20 | 18 | 16 | 14 |
| AMP.   | 9  | 12 | 17 | 18 | 30 |

MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.

INSULATION MATERIAL : VINYL

TERMINAL MATERIAL : COPPER


| A.W.G.  | BRAZED SEAM | BUTTED SEAM | d2<br>mm(inch) | W<br>mm(inch) | L<br>mm(inch) | COLOR |
|---------|-------------|-------------|----------------|---------------|---------------|-------|
| 22-16   | RVB1-3.2    | RV1-3.2 *   | 3.2 (.126)     | 5.5 (.217)    | 17.5 (.689)   | RED   |
|         | RVBS1-3.7   | RVS1-3.7 *  | 3.7 (.147)     |               |               |       |
|         | RVBM1-3.7   | RVM1-3.7*   | 3.7 (.147)     | 6.6 (.260)    | 19.4 (.764)   |       |
|         | RVBL1-3.7   | RVL1-3.7 *  | 3.7 (.147)     | 8.0 (.315)    | 20.8 (.819)   |       |
|         | RVBS1-4     | RVS1-4 *    | 4.3 (.169)     | 6.6 (.260)    | 19.4 (.764)   |       |
|         | RVBL1-4     | RVL1-4 *    | 4.3 (.169)     | 8.0 (.315)    | 20.8 (.819)   |       |
|         | RVB1-5      | RV1-5 *     | 5.3 (.209)     |               |               |       |
|         | RVBL1-5     | RVL1-5      | 5.3 (.209)     | 11.6 (.457)   | 26.8 (1.055)  |       |
|         | RVB1-6      | RV1-6 *     | 6.4 (.252)     |               |               |       |
|         | RVB1-8      | RV1-8 *     | 8.4 (.331)     | 11.6 (.457)   | 26.8 (1.055)  |       |
|         | RVB1-10     | RV1-10 *    | 10.5 (.413)    | 13.6 (.535)   | 30.5 (1.201)  |       |
|         | RVB1-12     | RV1-12      | 13.0 (.512)    | 19.2 (.756)   | 35.4 (1.394)  |       |
|         | RVB1-14     | RV1-14      | 15.0 (.591)    | 27.0 (1.063)  | 44.3 (1.744)  |       |
|         | RVB1-16     | RV1-16      | 17.0 (.669)    |               |               |       |
| RVB1-20 | RV1-20      | 21.0 (.827) |                |               |               |       |
| 16-14   | RVBS2-3.2   | RVS2-3.2    | 3.2 (.126)     | 5.5 (.217)    | 18.4 (.724)   | BLUE  |
|         | RVB2-3.2    | RV2-3.2 *   | 3.2 (.126)     | 6.6 (.260)    | 17.8 (.701)   |       |
|         | RVBS2-3.7   | RVS2-3.7 *  | 3.7 (.146)     | 6.6 (.260)    | 17.8 (.701)   |       |
|         | RVBM2-3.7   | RVM2-3.7*   | 3.7 (.146)     | 6.6 (.260)    | 19.4 (.764)   |       |
|         | RVBL2-3.7   | RVL2-3.7 *  | 3.7 (.146)     | 8.5 (.335)    | 21.8 (.858)   |       |
|         | RVBS2-4     | RVS2-4 *    | 4.3 (.169)     | 6.6 (.260)    | 19.4 (.764)   |       |
|         | RVBL2-4     | RVL2-4 *    | 4.3 (.169)     | 8.5 (.335)    | 21.8 (.858)   |       |
|         | RVBS2-5     | RVS2-5 *    | 5.3 (.209)     |               |               |       |
|         | RVBL2-5     | RVL2-5 *    | 5.3 (.209)     | 9.5 (.374)    |               |       |
|         | RVB2-6      | RV2-6 *     | 6.4 (.252)     | 12.0 (.472)   | 26.8 (1.055)  |       |
|         | RVB2-8      | RV2-8 *     | 8.4 (.331)     | 12.0 (.472)   | 26.8 (1.055)  |       |
|         | RVB2-10     | RV2-10 *    | 10.5 (.413)    | 13.6 (.535)   | 30.5 (1.201)  |       |
|         | RVB2-12     | RV2-12      | 13.0 (.512)    | 19.2 (.756)   | 35.4 (1.394)  |       |
|         | RVB2-14     | RV2-14      | 15.0 (.591)    | 27.0 (1.063)  | 44.3 (1.744)  |       |
|         | RVB2-16     | RV2-16      | 17.0 (.669)    |               |               |       |
|         | RVB2-20     | RV2-20      | 21.0 (.827)    |               |               |       |



ALL LISTED  
\*: ADDITIONAL



# VINYL-INSULATED RING TERMINALS

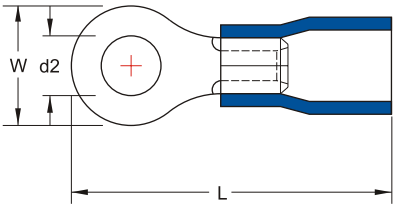

**MAXIMUM ELECTRIC CURRENT :**

|        |    |    |    |
|--------|----|----|----|
| A.W.G. | 14 | 12 | 10 |
| AMP.   | 30 | 35 | 50 |

**MAXIMUM ELECTRICAL RATING :** 105°C 600 VOLTS MAX.

**INSULATION MATERIAL :** VINYL

**TERMINAL MATERIAL :** COPPER

| A. W. G. | BRAZED SEAM | BUTTED SEAM | d2<br>mm(inch) | W<br>mm(inch) | L<br>mm(inch) | COLOR  |
|----------|-------------|-------------|----------------|---------------|---------------|--------|
| 14-12    | RVB3-4      | RV3-4       | 4.3 (.169)     | 8.0 (.315)    | 25.0 (.984)   | BLACK  |
|          | RVBS3-5     | RVS3-5      | 5.3 (.209)     |               |               |        |
|          | RVBL3-5     | RVL3-5      | 5.3 (.209)     | 12.0 (.472)   | 28.4 (1.118)  |        |
|          | RVB3-6      | RV3-6       | 6.4 (.252)     |               |               |        |
| 12-10    | RVB5-3.7    | RV5-3.7 *   | 3.7 (.147)     | 7.2 (.283)    | 22.7 (.894)   | YELLOW |
|          | RVBS5-4     | RVS5-4 *    | 4.3 (.169)     | 7.2 (.283)    | 22.7 (.894)   |        |
|          | RVBL5-4     | RVL5-4 *    | 4.3 (.169)     | 9.5 (.374)    | 26.0 (1.024)  |        |
|          | RVB5-5      | RV5-5 *     | 5.3 (.209)     |               |               |        |
|          | RVB5-6      | RV5-6 *     | 6.4 (.252)     | 12.0 (.472)   | 29.5 (1.161)  |        |
|          | RVBM5-6     | RVM5-6      | 6.4 (.252)     |               | 32.0 (1.260)  |        |
|          | RVB5-8      | RV5-8 *     | 8.4 (.331)     | 15.0 (.591)   | 34.0 (1.339)  |        |
|          | RVB5-10     | RV5-10 *    | 10.5 (.413)    |               |               |        |
|          | RVB5-12     | RV5-12      | 13.0 (.512)    | 19.2 (.756)   | 38.6 (1.520)  |        |
|          | RVB5-14     | RV5-14      | 15.0 (.591)    | 32.0 (1.260)  | 54.2 (2.134)  |        |
|          | RVB5-16     | RV5-16      | 17.0 (.669)    |               |               |        |
|          | RVB5-20     | RV5-20      | 21.0 (.827)    |               |               |        |



ALL LISTED  
\*: ADDITIONAL



INSULATED COPPER TERMINALS

