

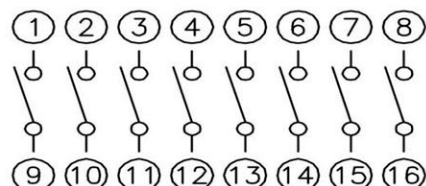
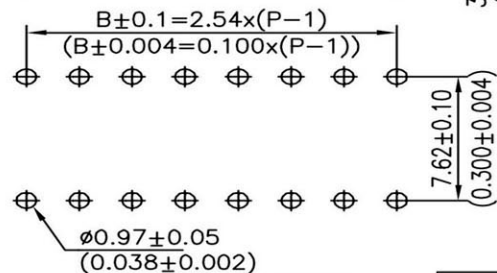
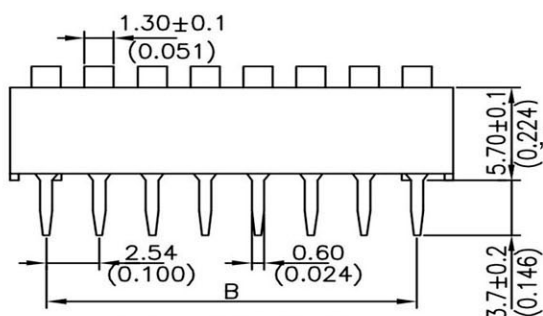


DIMENSION:(UNIT:mm/inches)

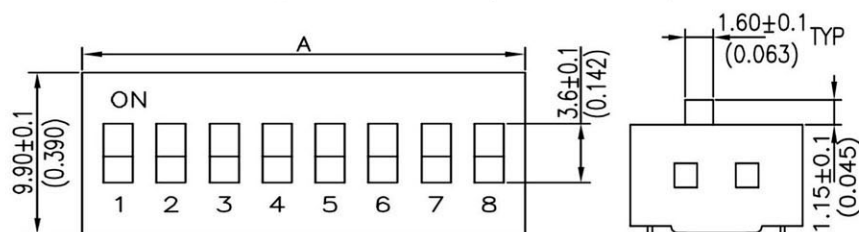

CIRCUIT DIAGRAM

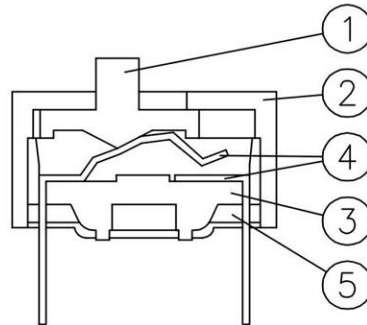

CONSTRUCTION

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 PBT THERMOPLASTIC	WHITE
2	COVER	UL94V-0 PBT THERMOPLASTIC	RED
3	BASE	UL94V-0 PBT THERMOPLASTIC	BLACK
4	TERMINAL	PHOSPHOR BRONZE	GOLD PLATING
5	POTTING	EXPOXY	BLACK

NO.OF POS	DIM.A	DIM.B
03	8.92(0.351)	5.08(0.200)
04	11.16(0.439)	7.62(0.300)
05	13.70(0.539)	10.16(0.400)
06	16.24(0.639)	12.70(0.500)
07	19.08(0.751)	15.24(0.600)
08	21.32(0.839)	17.78(0.700)
09	24.16(0.951)	20.32(0.800)
10	26.40(1.039)	22.86(0.900)
12	31.48(1.239)	27.94(1.100)

ELECTRICAL

1. Electrical Life: 2000 operation cycles per switch 24VDC, 25mA.
2. Non-switching Rating: 100mA, 50VDC.
3. Switching Rating: 25mA, 24VDC.
4. Contact Resistance: (a) 50mΩ max. at initial.
(b) 100mΩ max. after life test.
5. Insulation Resistance: 100MΩ min. at 500VDC.
6. Dielectric Strength: 500VAC/1 minute.

MECHANICAL

1. Mechanical life: 2000 operations per switch.
2. Operation Force: 800gf max.
3. Stroke: 2.0mm.
4. Operation Temp: - 25°C to 70°C
5. Storage Temp: - 40°C to 85°C

RoHS Compliant		T&T Connection System Co., Ltd.	
APPD. 核准	SCALE 比例 参考	TOLERANCE 容許公差 0 ± 0.35 .00 ± 0.25 ANG. ± 3°	PART NAME 品名 SLIDE TYPE DIP SWITCH
DWG. 製圖 Betty	UNIT 單位 M M	SIZE 線規尺寸 A 4	PART NO. 料號 SDIP-xx
DATE 制表日 2017/10/31	PAGE 張數 1 OF 1	REV. 版本 C	