


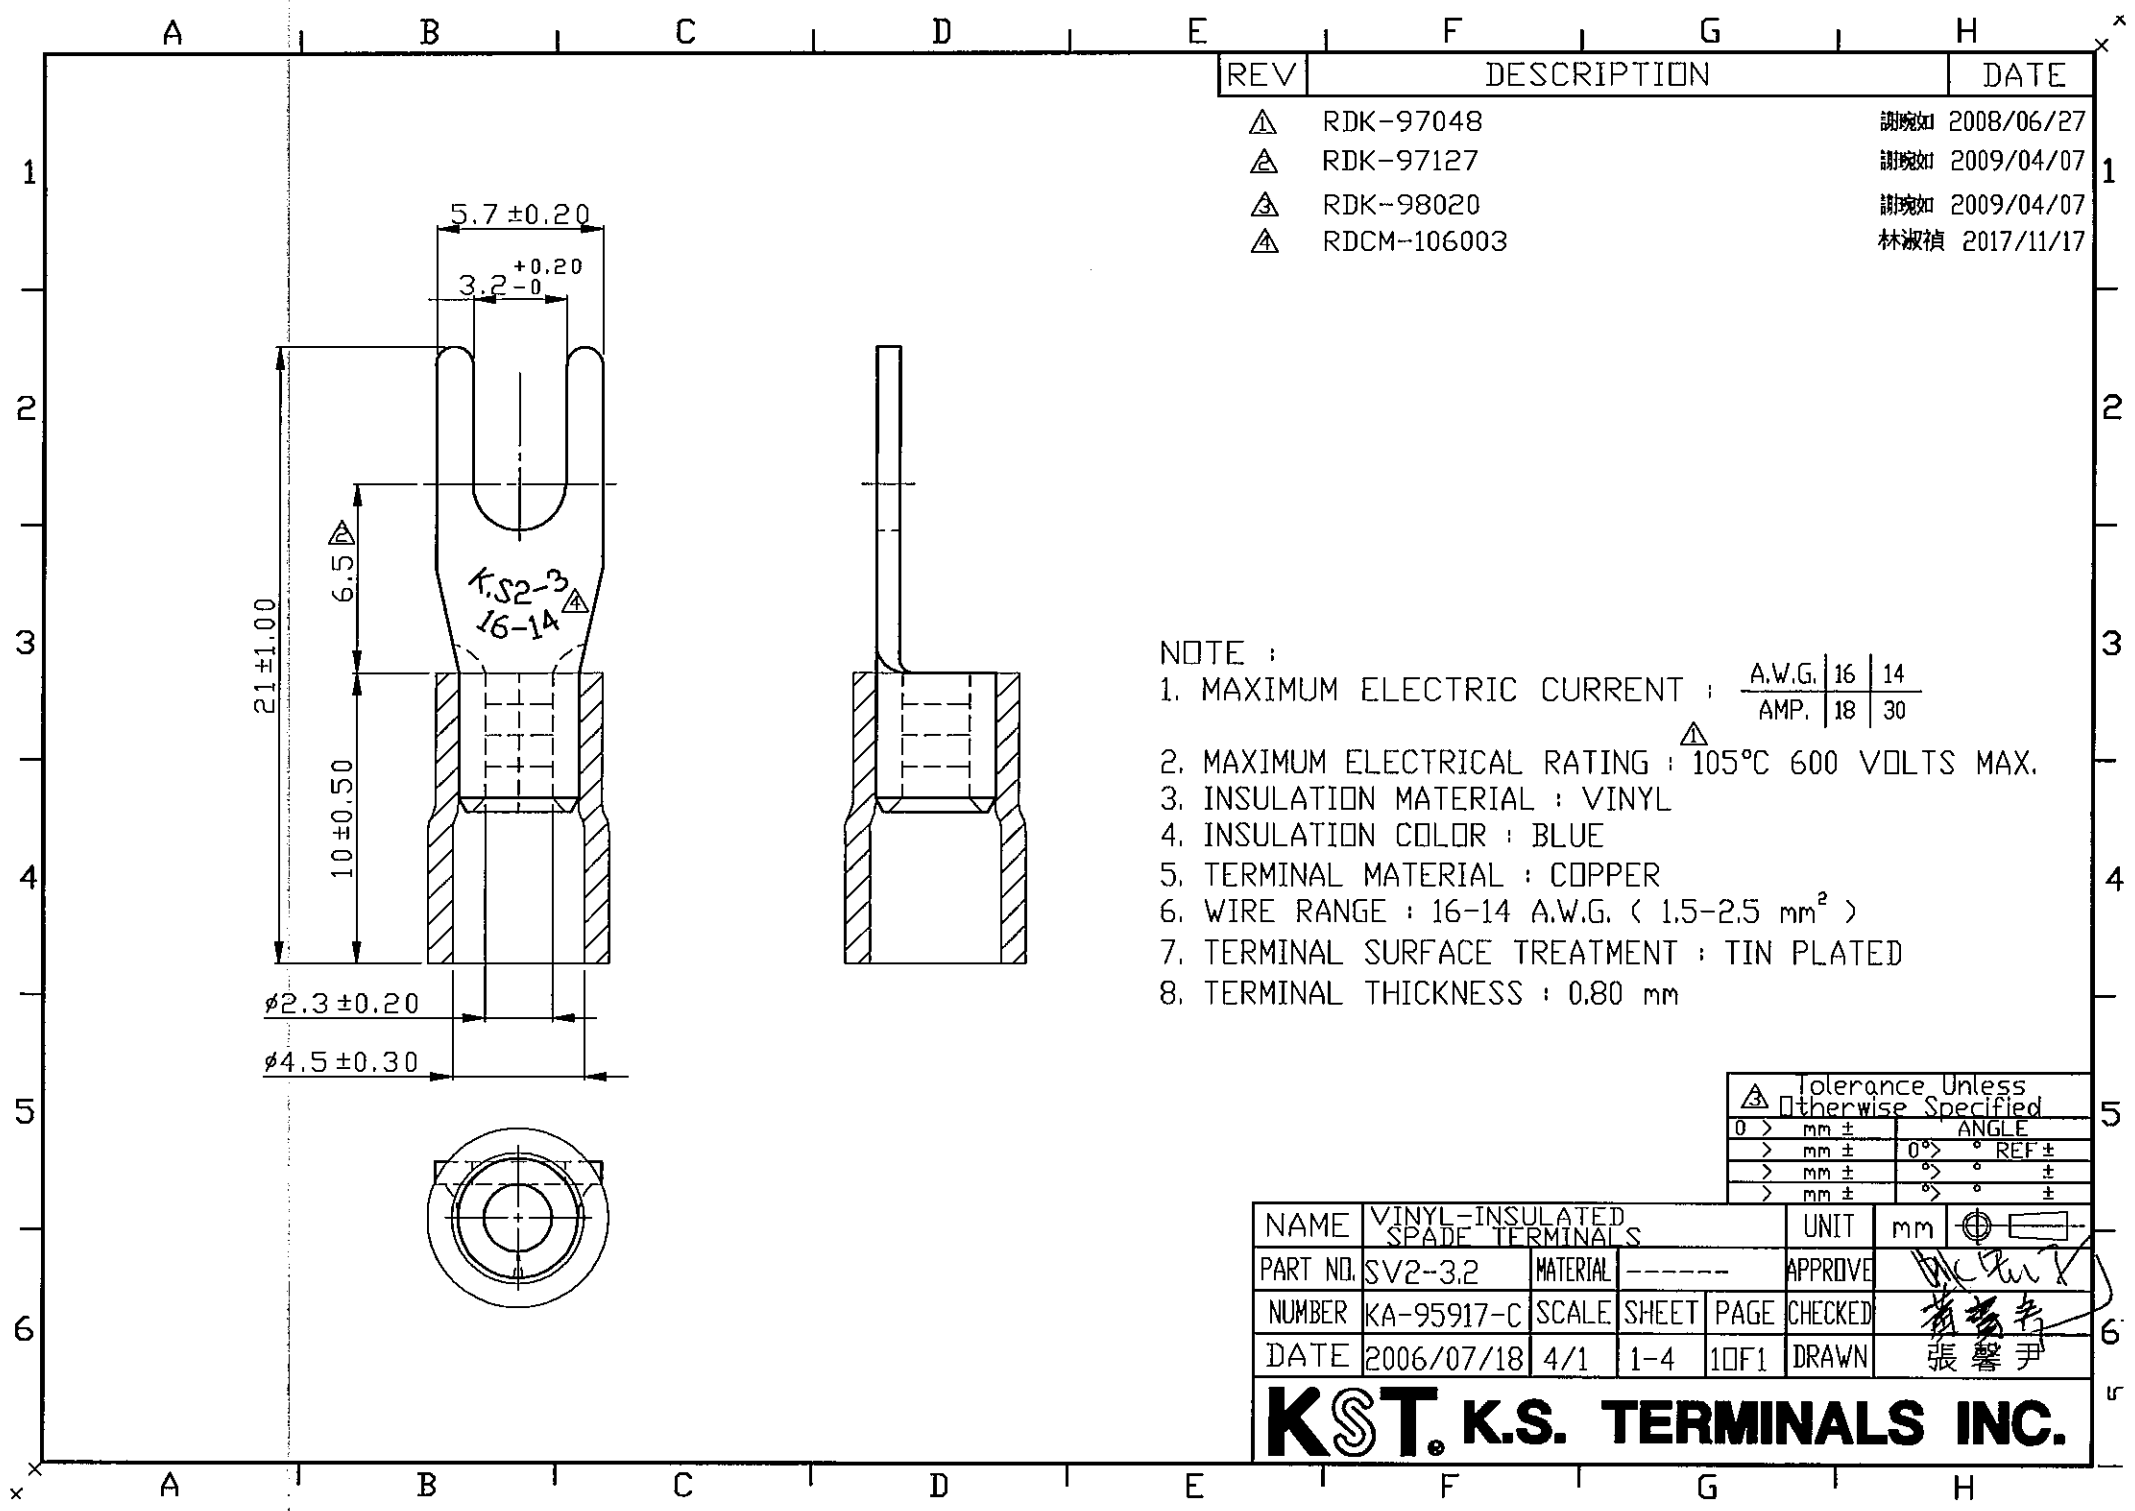

REV	DESCRIPTION	DATE
△	RDK-97048	謝婉如 2008/06/27
△	RDK-97127	謝婉如 2009/04/07
△	RDK-98020	謝婉如 2009/04/07
△	RDCM-106003	林淑禎 2017/11/17

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified	
0 >	mm ±
>	mm ±
>	mm ±
>	mm ±

ANGLE	
0°	° REF ±
>	° ±
>	° ±

NAME	VINYL-INSULATED SPADE TERMINALS				UNIT	mm	⊕	⊖
PART NO.	SV2-3.2	MATERIAL	-----	APPROVE	張馨尹			
NUMBER	KA-95917-C	SCALE	SHEET	PAGE	CHECKED	張馨尹		
DATE	2006/07/18	4/1	1-4	10F1	DRAWN	張馨尹		

KST. K.S. TERMINALS INC.