


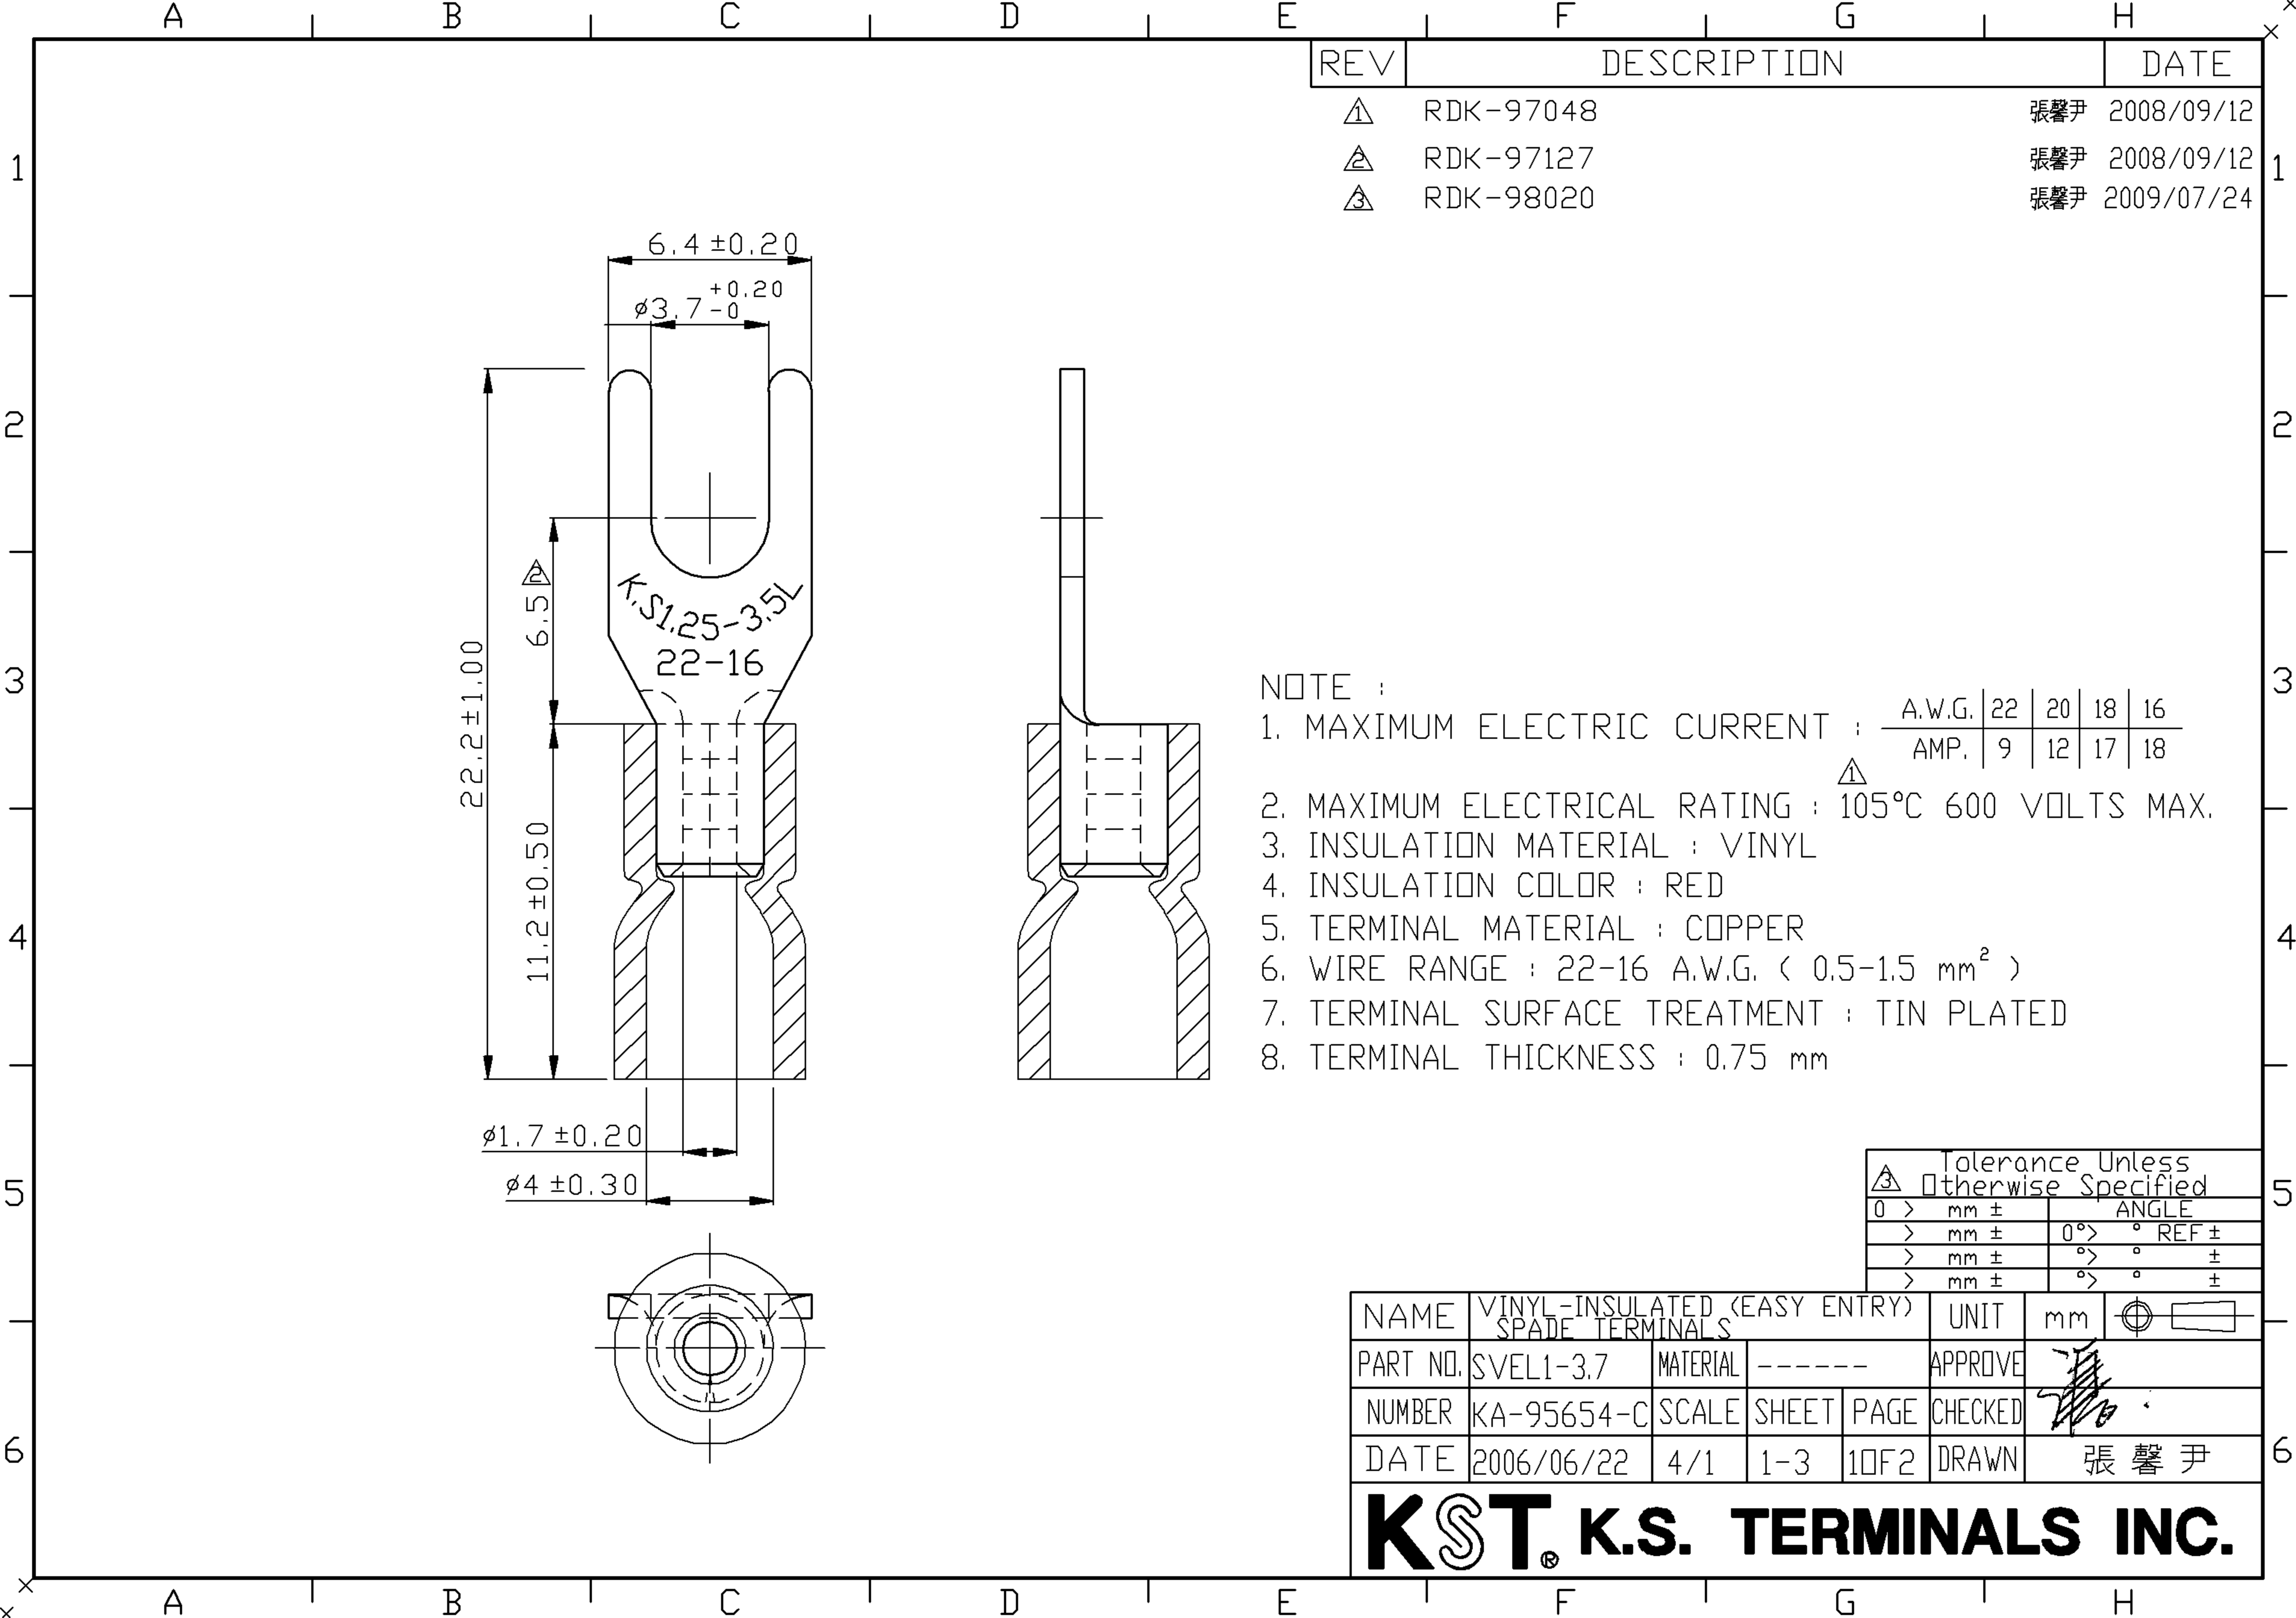

REV	DESCRIPTION	DATE
△	RDK-97048	張馨尹 2008/09/12
△	RDK-97127	張馨尹 2008/09/12
△	RDK-98020	張馨尹 2009/07/24

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	9	12	17	18
 2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL
 4. INSULATION COLOR : RED
 5. TERMINAL MATERIAL : COPPER
 6. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
 7. TERMINAL SURFACE TREATMENT : TIN PLATED
 8. TERMINAL THICKNESS : 0.75 mm

△	Tolerance Unless Otherwise Specified		
0 >	mm ±	ANGLE	
>	mm ±	0° >	° REF ±
>	mm ±	° >	° ±
>	mm ±	° >	° ±

NAME	VINYL-INSULATED (EASY ENTRY) SPADE TERMINALS			UNIT	mm	⊙	⊙
PART NO.	SVEL1-3.7	MATERIAL	-----	APPROVE	張馨尹		
NUMBER	KA-95654-C	SCALE	SHEET	PAGE	CHECKED	張馨尹	
DATE	2006/06/22	4/1	1-3	10F2	DRAWN	張馨尹	

KST. K.S. TERMINALS INC.