
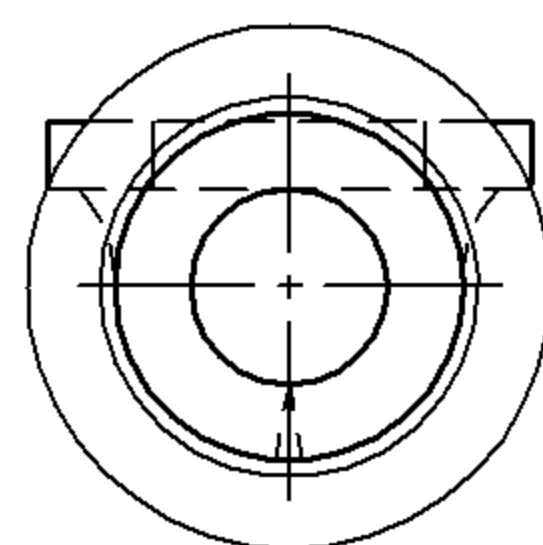
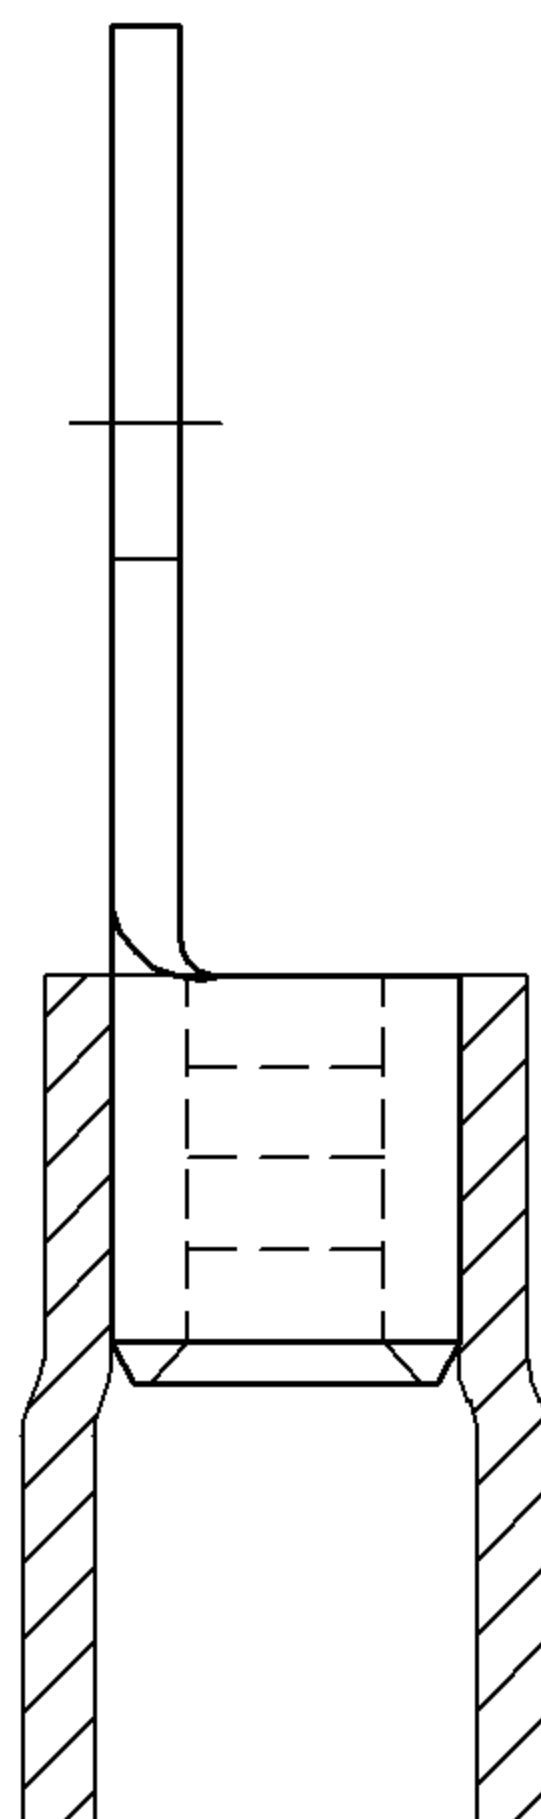


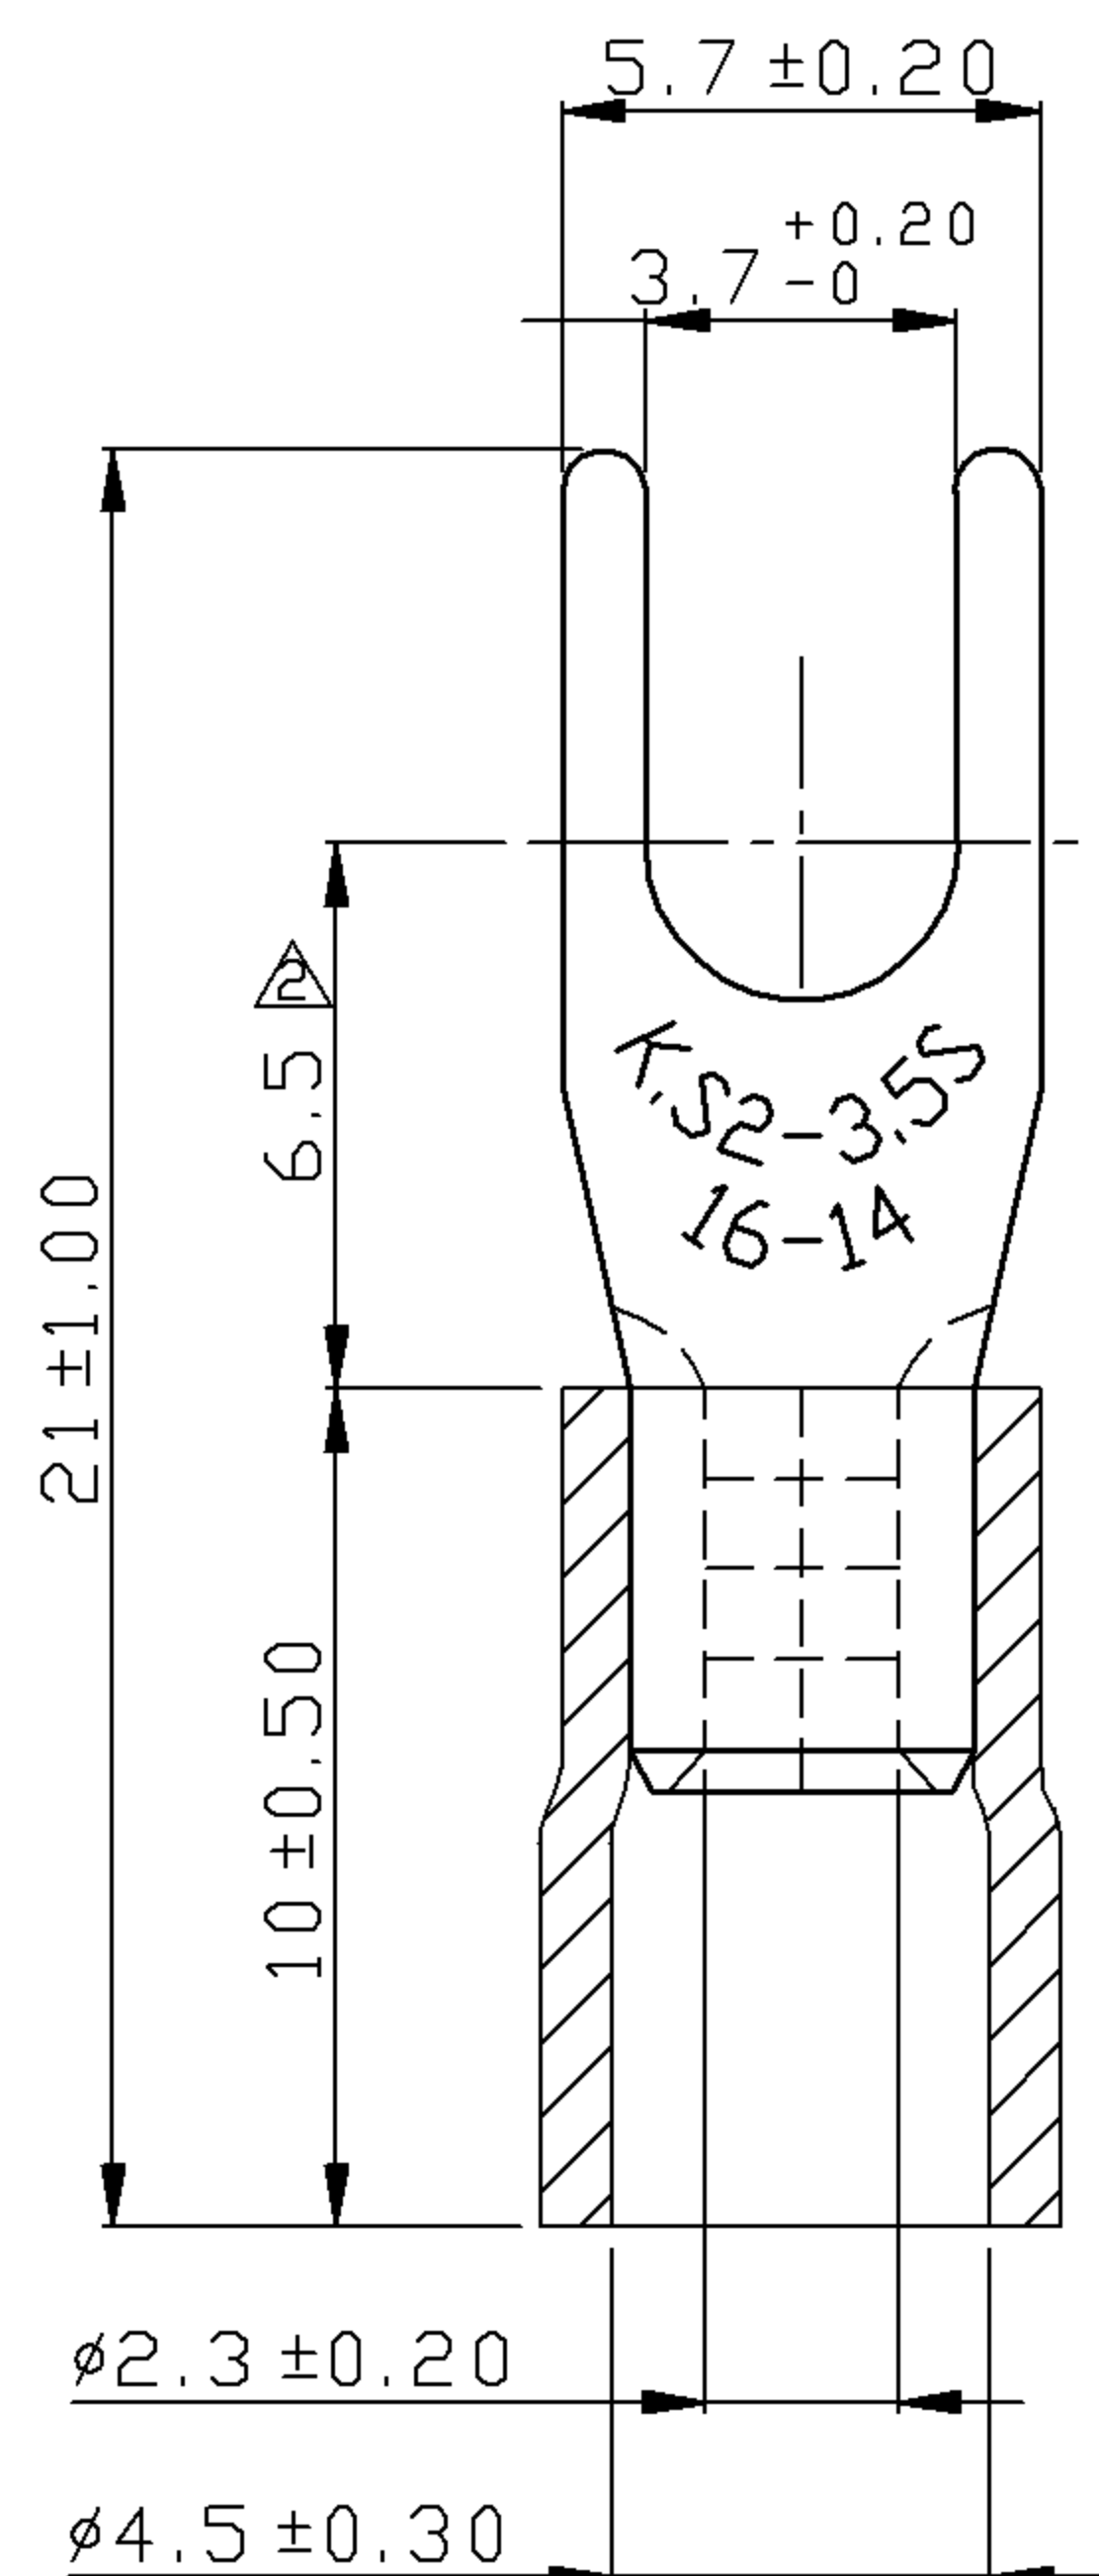

REV	DESCRIPTION	DATE
△	RDK-97048	謝婉如 2008/06/27
△	RDK-97127	謝婉如 2009/04/07
△	RDK-98020	謝婉如 2009/04/07

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
7. TERMINAL SURFACE TREATMENT : TIN PLATED
8. TERMINAL THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified			
0	>	mm ±	ANGLE
>		mm ±	0° > ° REF ±
>		mm ±	° > ° ±
>		mm ±	° > ° ±

NAME	VINYL-INSULATED SPADE TERMINALS				UNIT	mm
PART NO.	SVS2-3.7	MATERIAL	-----	APPROVE	張馨尹	
NUMBER	KA-95918-C	SCALE	SHEET	PAGE	CHECKED	張馨尹
DATE	2006/07/18	4/1	1-3	10F2	DRAWN	張馨尹

KST. K.S. TERMINALS INC.