
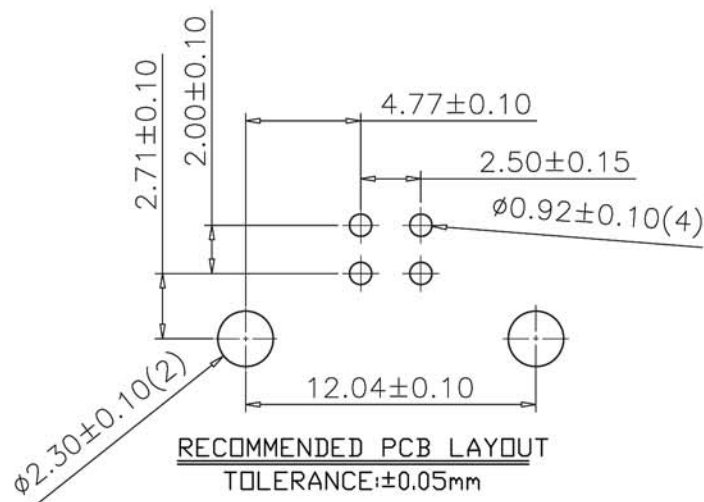
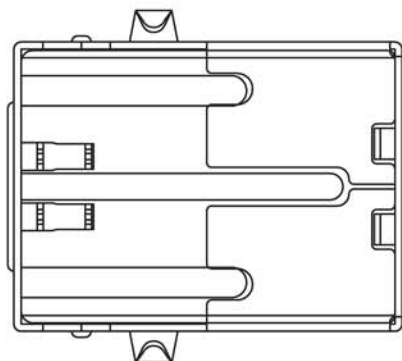
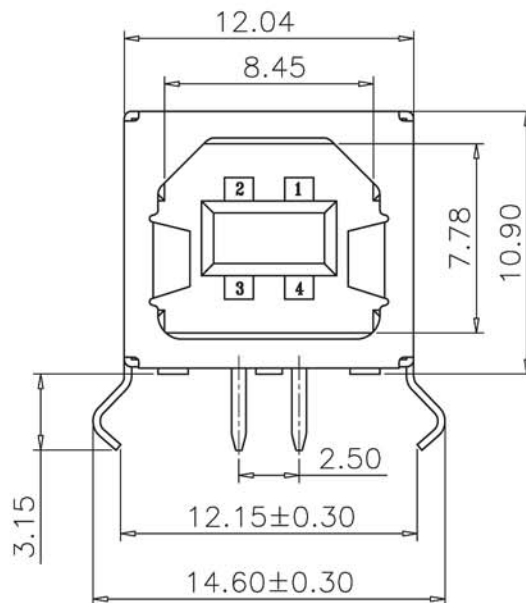


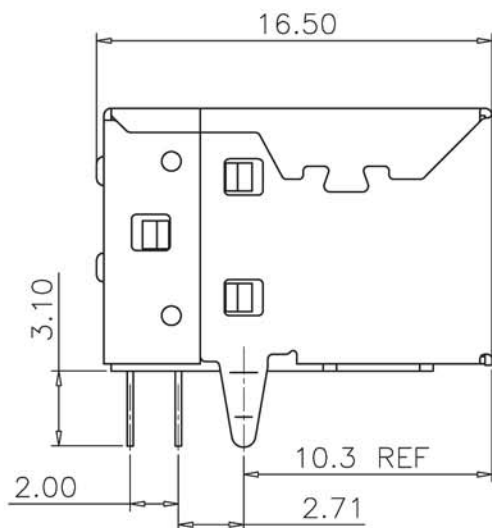

NOTE

MATERIAL:

INSULATOR: PBT+30% G.F. UL94 V-0

SHELL : BRASS

BACKSHELL:SPCC

SHELL: NICKEL OVER ALL PLATING

CONTACTS :PHOSPHOR BRONZE

COLD PLATING ON CONTACT AREA

100u" TIN PLATING ON SOLDER TAIL

50u" NICKEL UNREPLATED OVER ALL

DURABILITY:1500 CYCLES MIN.

CURRENT RATING: 1.5A

VOLTAGE RATING: 30V

WITHSTANDING VOLTAGE 500V AC

CONTACT RESISTANCE 30MΩ MAX.

INSULATION RESISTANCE 1000MΩ MIN.

TEMPERATURE RANGE -55°C~+85°C



TOLERANCE (mm)	APPROVALS	DATE	TITLE		AMPHENOL	
X, ±0.30	DRAWN Stephane	14/Jan/2015	USB B type R/A Dip		Amphenol European Design Center	
X.X ±0.20	CHECKED Rob	14/Jan/2015				
X.XX ±0.15	APPROVED Rob	14/Jan/2015				
UNLESS OTHERWISE SPECIFIED	UNIT : mm	SIZE : A4	DRAWING N°	TUEB4F2D0B		REV. C

Scale N.A.

Sheet 1 of 1