

Wannenstecker Box Header

WANNENSTECKER RM 2,54 MM SMT
BOX HEADER PITCH 2.54 MM SMT



Revision: 01

SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 1000 MΩ Min.
Contact Resistance: 20 mΩ Max.
Dielectric Voltage: 1000 V AC for one minute
Operation Temperature: -40 °C to +105 °C

MATERIAL

Insulator: Nylon 6T black, UL94V-0
Contacts: Brass

FINISH

Contacts: Golf




HANDLING

Processing: Reflow soldering



TOLERANCE

.X ±0.35
.XX ±0.25

RoHS
COMPLIANT

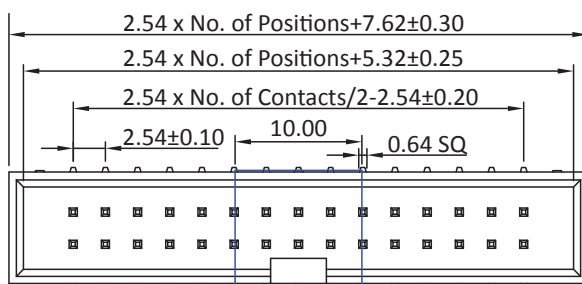

Recommended PCB Layout
(PCB Tolerance ± 0.05)

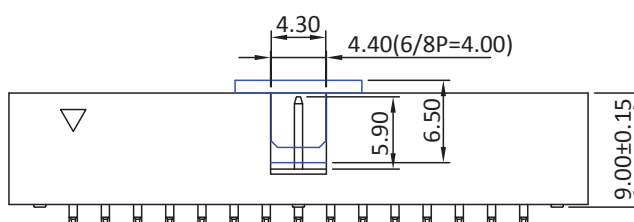

Order Information

Series	No. of Contacts	Contact Plating	Version	Packing
WT	#	#	#	#
Box Header 2.54mm	6 : 2 x 3	G : Gold Flash *	S : SMT	S : Tube & Pad *
	8 : 2 x 4	GA : 5 μ" Gold		R : Tape & Reel & Pad
	10 : 2 x 5	GB : 10 μ" Gold		
	14 : 2 x 7	GC : 20 μ" Gold		
	16 : 2 x 8	GD : 30 μ" Gold		
	20 : 2 x 10			
	26 : 2 x 13			
	34 : 2 x 17			
	40 : 2 x 20			
	50 : 2 x 25			

* = Standard