

M54513P

6249826 MITSUBISHI ELEK (LINEAR)

8-UNIT 50mA TRANSISTOR ARRAY

80C 09275 D T-43-25

DESCRIPTION

The M54513P, 8-channel sink drivers, consists of 8 NPN transistors with $2\text{k}\Omega$ series input resistors.

FEATURES


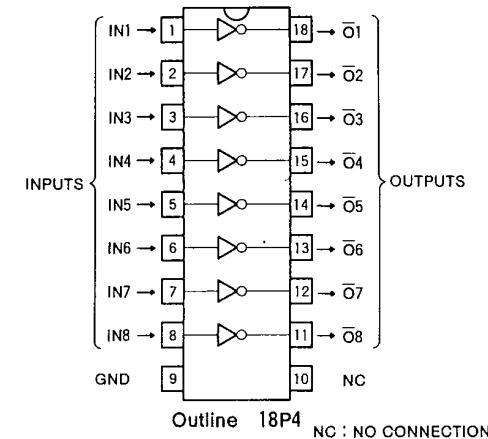
- High output sustaining voltage of 40V
- 50mA output sink current capability
- Wide operating temperature range ($T_a = -20 \sim +75^\circ\text{C}$)

APPLICATION

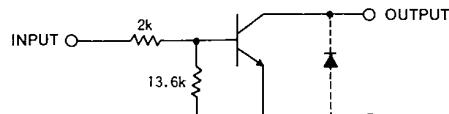
LED or incandescent display digit driver

FUNCTION

The M54513P is comprised of eight NPN drivers. Each input has a voltage divider by $2\text{k}\Omega$ and $13.6\text{k}\Omega$ resistors. All emitters and the substrate are connected together to pin 9. The open collector outputs are capable of sinking 50mA and will withstand 40V in the OFF state.

PIN CONFIGURATION (TOP VIEW)

18-pin molded plastic DIP

CIRCUIT SCHEMATIC

Unit : Ω

ABSOLUTE MAXIMUM RATINGS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V_{CEO}	Output sustaining voltage	Transistor OFF	-0.5 ~ +40	V
I_C	Collector current	Transistor ON	50	mA
V_I	Input voltage		10	V
T_{opr}	Operating ambient temperature range		-20 ~ +75	$^\circ\text{C}$
T_{stg}	Storage temperature range		-55 ~ +125	$^\circ\text{C}$

RECOMMENDED OPERATIONAL CONDITIONS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Limits			Unit
		Min	Typ	Max	
V_O	Output voltage	0		40	V
I_C	Collector current per channel	0		20	mA
V_{IH}	"H" Input voltage	$I_C = 20\text{ mA}$	2	8	V
V_{IL}	"L" Input voltage		0	0.2	V

6249826 MITSUBISHI ELEK (LINEAR)

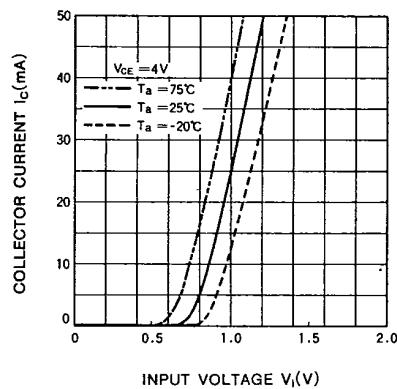
8-UNIT 50mA TRANSISTOR ARRAY
80C 09276 D7-43-25ELECTRICAL CHARACTERISTICS ($T_a = -20 \sim +75^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Unit
			Mn	Typ	Max	
$I_{o(\text{leak})}$	Output leakage current	$V_o = 40\text{V}$			50	μA
$V_{CE(\text{sat})}$	Output saturation voltage	$V_i = 2\text{V}, I_c = 12\text{mA}$		30	100	mV
I_i	Input current	$V_i = 2.5\text{V}$		70	170	mA
h_{FE}	DC forward current gain	$V_{CE} = 4\text{V}, I_c = 30\text{mA}, T_a = 25^\circ\text{C}$	80	200		—

TYPICAL CHARACTERISTICS

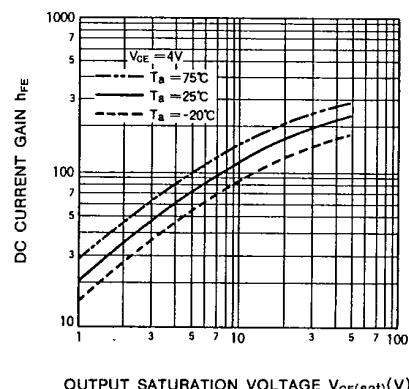
OUTPUT CURRENT

CHARACTERISTICS



DC CURRENT GAIN

CHARACTERISTICS



OUTPUT CHARACTERISTICS

